



Catalog Number: U2732-XT-HSP  
Item Description: 200A 7T RL HD LVR 2P CTR  
UPC Code: 784572215689





Brand Name: Milbank  
Type: Ringless Meter Socket  
Application: Meter Socket  
Standard: UL Listed  
Voltage Rating: 600 Volts Alternating Current  
Amperage Rating: 200 Continuous Ampere  
Phase: 3 Phase  
Frequency Rating: 60 Hertz  
Number Of Cutouts: 0  
Cable Entry: Overhead and Underground, Center Wireway  
Terminal: 3/8 Inch Stud Line Side and Lay in Load Side  
Mounting: Surface Mount  
Enclosure: Type 3R, G90 Galvanized Steel with Powder Coat Finish

Additional Specifications: Number of Jaws:7 Terminal  
Hub Opening and Closing Plates:Twin Large Closing Plates  
Hub Opening and Closing Plates:Twin Large Closing Plates  
Hub Opening and Closing Plates:Twin Large Closing Plates  
Hub Opening and Closing Plates:Twin Large Closing Plates  
Hub Opening and Closing Plates:Twin Large Closing Plates



*Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.*

| FEATURE TABLE |     |                            |
|---------------|-----|----------------------------|
| ITEM          | QTY | DESCRIPTION                |
| A             | 6   | STD. MNTG. EMBOSS          |
| B             | 8   | 5/16 SOLID K.O.            |
| C             | 1   | ¼, ½ CONC. K.O.            |
| D             | 6   | 1¼, 1½, 2, 2½ CONC. K.O.   |
| E             | 2   | 2, 2½, 3, 3½, 4 CONC. K.O. |

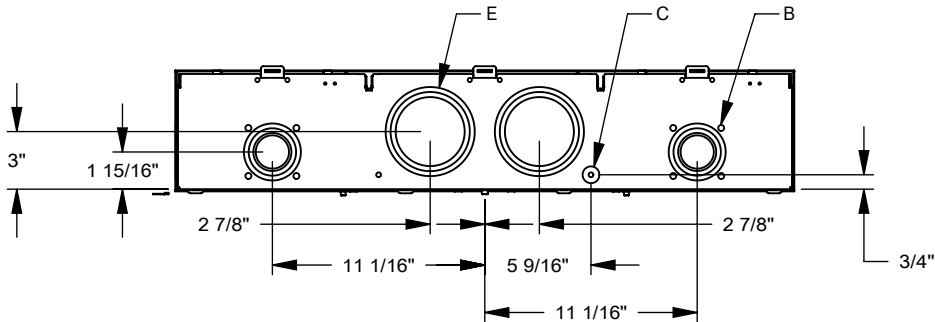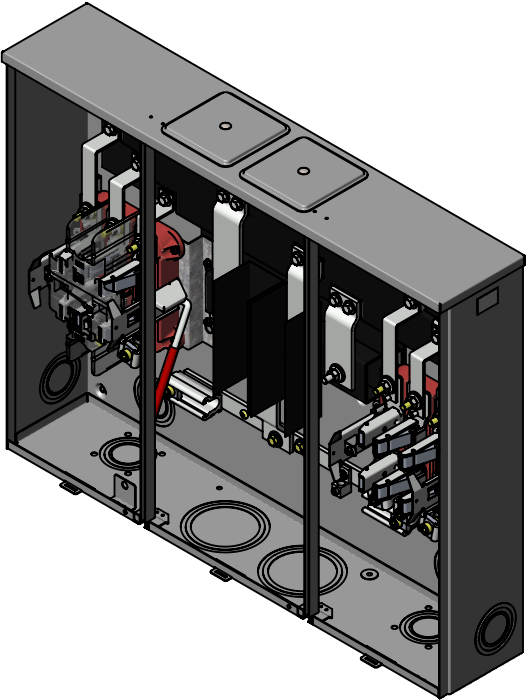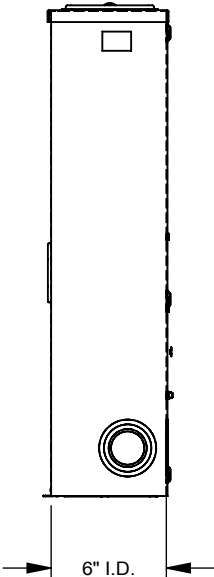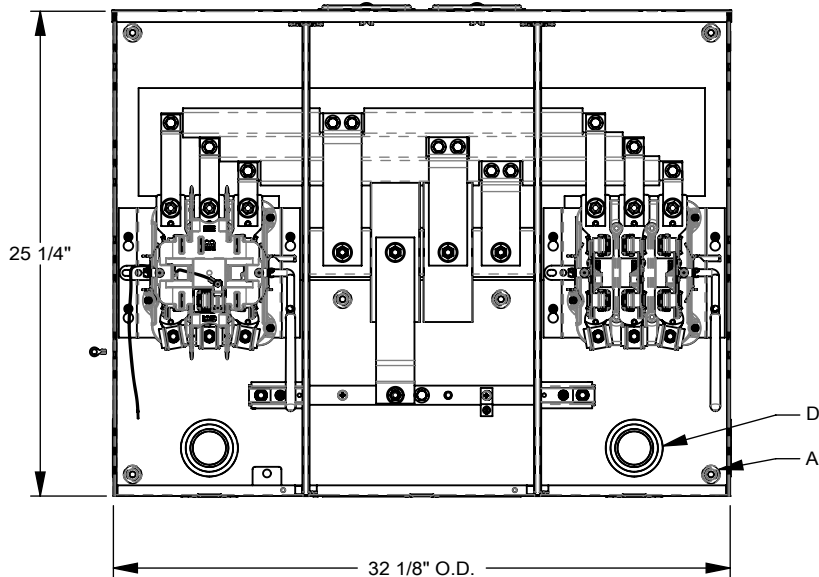

Version:

1

All dimensions are +/- 1/16".  
Drawing views are not to scale.  
Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.