

VIEW SHOWN  
WITHOUT COVER

(6) #4-300 KCMIL  
NEUTRAL LUGS

(7) #4-2/0  
GROUND LUGS

SPRING-  
LOADED  
STUDS -  
SEE DETAIL

REMOVABLE BACK  
PLATE WITH (6) KOs  
1, 1-1/4, 1-1/2, 2"

2-13/16

2-13/32

2-7/16

1-5/8 TYP

3-1/4 TYP

2" TYP

2-3/16

3-1/4

2-9/32

(6) KOs, 1-1/2, 2, 2-1/2"

70-5/16

9  
TYP

12-5/32

16-3/32

4-1/32

36" TO  
BOTTOM OF  
QUICK ROLL  
BRACKET

24-3/8 TO  
CROSS BUS  
CENTER

TOP VIEW

## Catalog Numbers, Features and Ratings

- MAIN BUS RATING: 1200 AMPS, 240V AC MAX.
- METER SOCKET RATING: 200 AMPS CONTINUOUS
- 100,000 AIC RATING MAX.
- BRANCH RATING: TOP 3 BRANCHES 200A MAX,  
BOTTOM 3 BRANCHES 225A MAX.
- 3 PHASE INPUT / 1 PHASE OUTPUT
- TYPE 1 INDOOR ENCLOSURE
- MOUNTING RAILS AND ADJUSTABLE BRACKETS FOR SECURE MOUNTING

| Catalog No. | Main Bus | Meter Positions | Cover Type | 5th Jaw   | Horn Bypass |
|-------------|----------|-----------------|------------|-----------|-------------|
| MM62225J    | 3 Phase  | 6               | Ring       | Installed |             |
| MM62225RJ   | 3 Phase  | 6               | Ringless   | Installed |             |
| MM62225RJB  | 3 Phase  | 6               | Ringless   | Installed | Installed   |

## Additional Modules

### FOR USE WITH:


| Module Description | Siemens Series#                  |
|--------------------|----------------------------------|
| Main Breakers      | (W)MC, WB, WEB, WXB              |
| Switches           | WMP, WMS, WS, WES                |
| Tap/Terminal Boxes | WMTB, WTB, WET, WT PU            |
| Pull Boxes         | WMMB                             |
| Meter Module       | (W)MM, WxMM, (W)MT, (W)ML, (W)MK |
| Meter Combinations | WC, WCL, WCT                     |
| Extension Box      | WMEX, WSP, WSPD                  |
| Bussed Elbow       | BE                               |

### Connect Modules


| Using:       | Catalog Number / Torque                   |
|--------------|-------------------------------------------|
| QuickConnect | QC4, Torque 400-440 lb-in (35-36 ft.-lb.) |

## Rephasing Instructions

Factory installed phasing is AB, BC, AC, AB, BC, and AC top to bottom. Each meter socket can be rephased AB, BC, or AC by repositioning line bus straps. If a different phase arrangement is needed, loosen hex nuts and reconnect one or both line bus straps, then retighten the hex nuts to 60-65 lb.-in. Tighten hex nut at meter socket first, then tighten hex nut on vertical phase bus.

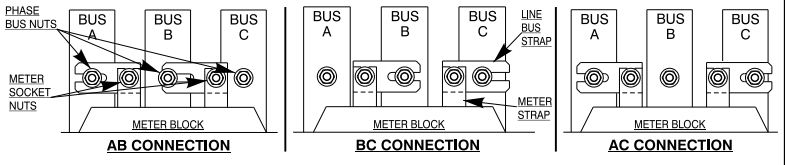

## ENLARGED SOCKET DETAIL

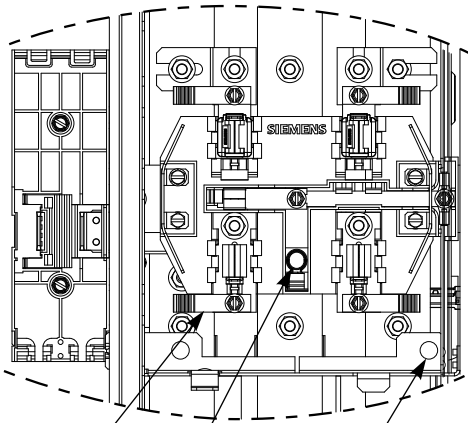

HORN BYPASS  
5th JAW CAN BE RELOCATED  
TO 6 O'CLOCK POSITION


BARREL LOCK  
PROVISION

**MM62225RJB**  
**SHOWN**

## Accessories

| Description              | Catalog No. |
|--------------------------|-------------|
| Horn By-Pass Mod         | ECMFH       |
| End Closure Plate        | WMEP        |
| 5th Jaw Mod              | ECMF5       |
| Meter Cover Plate        | ECCP3       |
| Meter Socket             | ECMFS       |
| 225A Breaker Mounting    | ECMFBM2     |
| Meter Cover, Ring Type   | ECMFMC      |
| Meter Cover, Ringless    | ECMFMCR     |
| Parts Kit                | ECMFPK      |
| Load Cover Screws        | ECMFCS      |
| Bottom Pull Cover        | ECMFC       |
| Mounting Rail            | MMRAIL      |
| Mounting Clip            | MMCLIP      |
| Quick Phase Strap        | ECMFPS      |
| Breaker Cover Repl.      | ECBC        |
| Mounting Tabs (2)        | ECMFTAB     |
| Ground Bar Kit           | ECMFGN125   |
| Neutral Bar Kit 225A     | ECMFN225    |
| Ringless Conversion Kit  | ECMMRLCK    |
| Back Rail/Clip           | ECMFWLCLIP  |
| Wall Mounting Rail (60") | MMZR60      |
| QP Breaker Retainer      | ECMBR2      |
| KO Plate with Knockouts  | ECMMKOP     |
| KO Plate w/o Knockouts   | ECMMNKOP    |

## Schematic

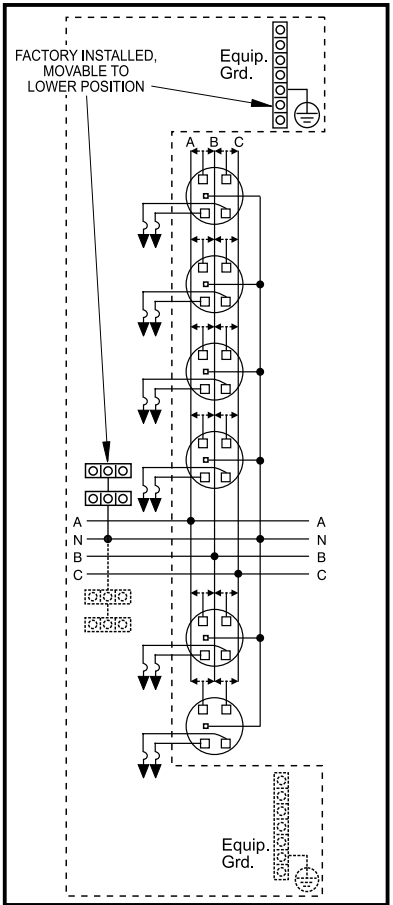

© 2014 Copyright Siemens Industry, Inc.

**SIEMENS**  
Siemens Industry, Inc.

**PowerMod™ Indoor Meter Stack**

Catalog Numbers:  
**MM62225J, MM62225RJ, MM62225RJB**

Size B Dwg. No. **In 225A\_3Ph\_6Pos**

Dwn KAM Date 1/6/14 DO NOT SCALE DRAWING SHEET 1 OF 1