Catalog Number:	U2736-XT-K8
Item Description:	200A 7T RL HD LVR 6P CTR
UPC Code:	784572320963

Brand Name:	Milbank
Type:	Ringless Meter Socket
Application:	Meter Socket
Standard:	UL Listed
Voltage Rating:	600 Volts Alternating Current
Amperage Rating:	200 Ampere Continuous
Phase:	3 Phase
Frequency Rating:	60 Hertz
Cable Entry:	Overhead and Underground, Center Wireway
Terminal:	Double Mechanical Line Side and Lay in Load Side
Mounting:	Surface Mount
Enclosure:	Type 3R, G90 Galvanized Steel with Powder Coat Finish

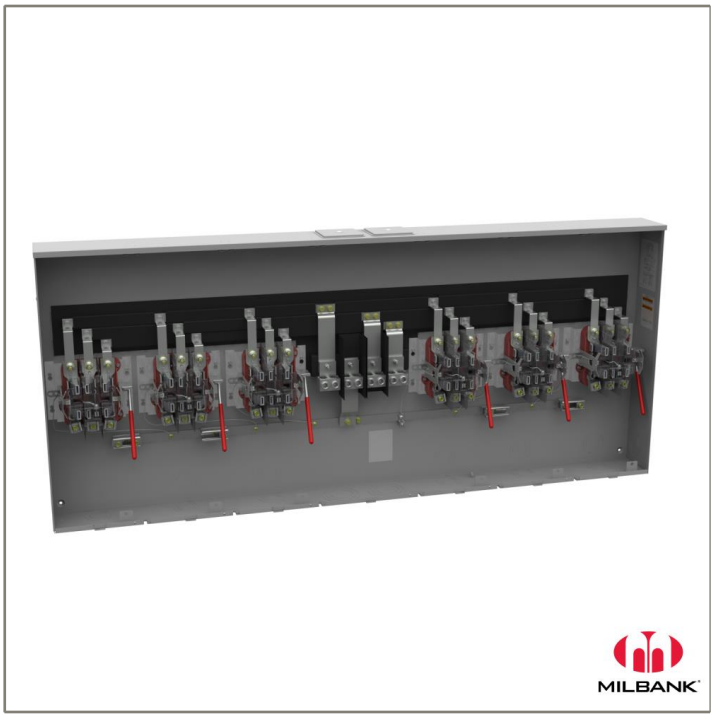

Additional Specifications:

Line Side Wire Range:Two 2 AWG - 600 kcmil

Load Side Wire Range:6 AWG - 350 kcmil

AIC or SCCR Rating: Please Contact Factory

Optional Line Side Lug Kits:K3082, K3441, K3442, K3083

Maximum Amperage:200 Maximum Ampere

Number of Jaws:7 Terminal

Hub Opening and Closing Plates:Twin Large Closing Plates

Bypass Provision:Lever Bypass

Number Positions:6 Positions

Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	6	STD. MNTG. EMBOSS
B	24	5/16 SOLID K.O.
C	1	¼, ½ CONC. K.O.
D	14	1, 1¼, 1½, 2, 2½ CONC. K.O.
E	2	2, 2½, 3, 3½, 4 CONC. K.O.

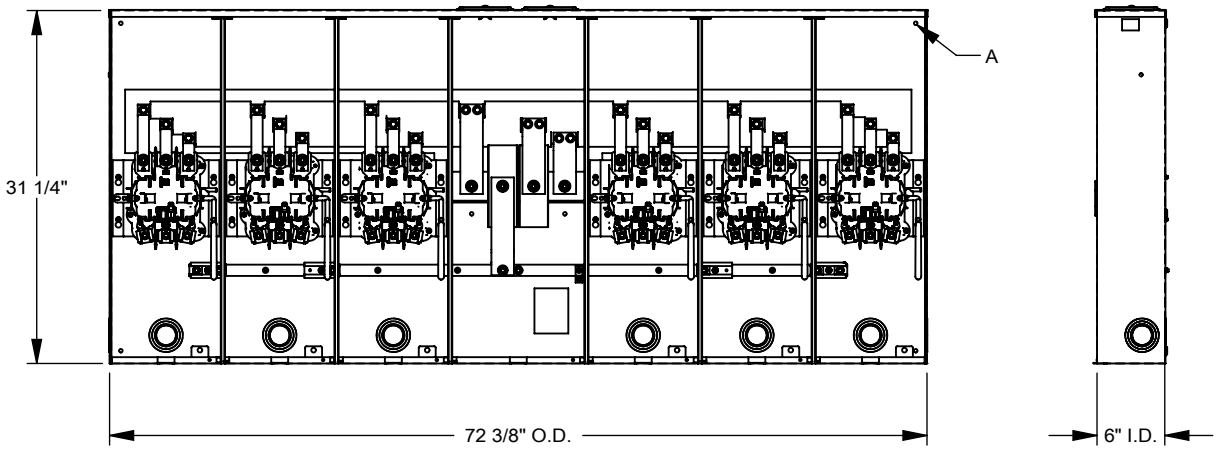

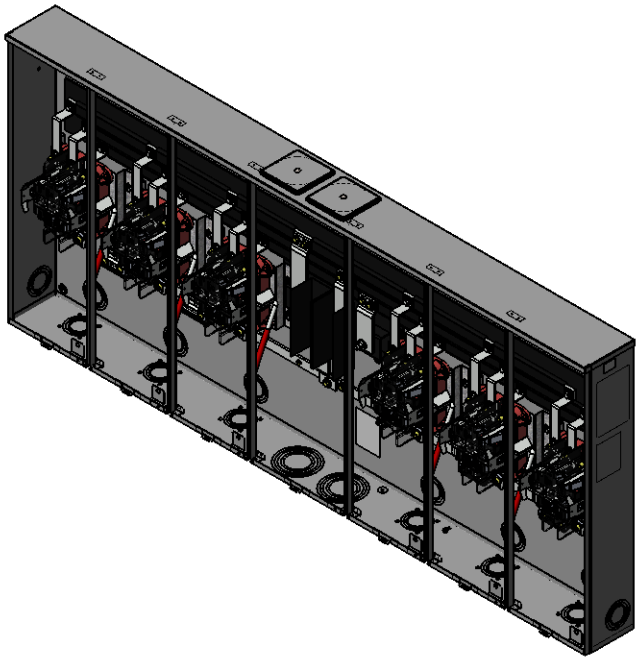

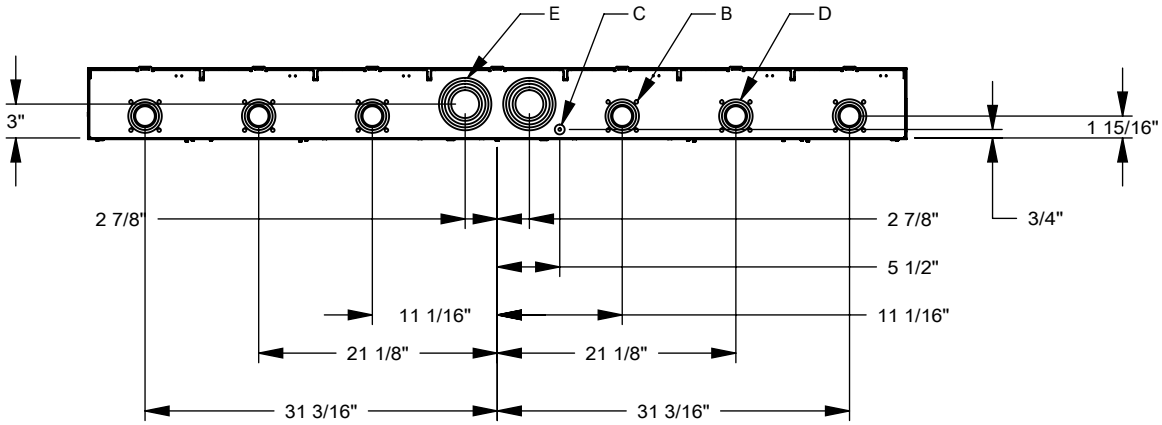

MILBANK
ENERGY AT WORK

Version:

1

All dimensions are +/- 1/16”.
Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.