


# AUSTIN PENDANT PUSHBUTTON ENCLOSURES

Austin pendant pushbutton enclosures are Underwriters Laboratories Listed and are designed to house standard oiltight switches, pilot lights, and pushbutton switches. They provide a degree of protection against dust, dirt, oil, and water.


## Construction:

- Fabricated from 14 gauge steel.
- Has hub and hanger bracket at top for overhead wiring and support.
- Continuously welded and ground smooth.
- Cover held in place by captivated screws threaded into sealed wells.
- Neoprene gasket attached to cover with oil resistant adhesive.
- Standard “4-way” 30mm pushbutton holes.

Pushbutton Enclosures & Consoles

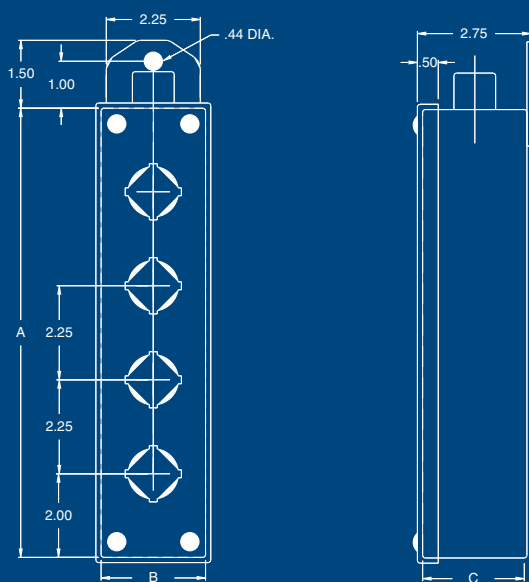

HOLE ARRANGEMENT

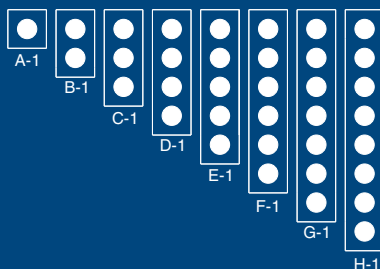

Note: G-1 has .5” added on each side of center hole.  
H-1 has 1” added between the two center holes.

## Finish:

Austin pendant pushbutton enclosures are provided standard with as ANSI 61 gray polyester powder coating.

## Options:

- Special materials.
- Special finishes.
- Custom box size or construction.
- “4-way” 22mm pushbutton holes.

**INDUSTRY STANDARDS**

UL 50 **Types 4, 12 & 13**  
NEMA **Types 4, 12 & 13**  
CUL **Types 4, 12 & 13**

Austin Electrical Enclosures  
Post Office Box 2320  
Yadkinville, NC 27055

Phone: 336.468.2851  
800.288.2851

# AUSTIN PENDANT PUSHBUTTON ENCLOSURES

Catalog Number	Enclosure Size (AxBxC)	Holes	Hole Arrangement	Weight	"A" Dimension	Conduit Hub
AB-A1PPB	3 7/8x2 1/2x2 3/8	1	A-1	2	4	1/2
AB-B1PPB	6 1/8x2 1/2x2 3/8	2	B-1	2	6 1/4	3/4
AB-C1PPB	8 3/8x2 1/2x2 3/8	3	C-1	3	8 1/2	3/4
AB-D1PPB	10 5/8x2 1/2x2 3/8	4	D-1	3	10 3/4	3/4
AB-E1PPB	12 7/8x2 1/2x2 3/8	5	E-1	4	13	1
AB-F1PPB	15 1/8x2 1/2x2 3/8	6	F-1	4	15 1/4	1
AB-G1PPB	18 3/8x2 1/2x2 3/8	7	G-1	5	18 1/2	1
AB-H1PPB	20 5/8x2 1/2x2 3/8	8	H-1	5	20 3/4	1 1/4

Pushbutton  
Enclosures &  
Consoles

