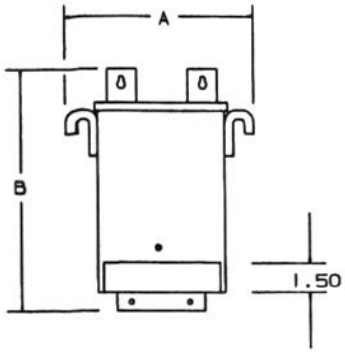



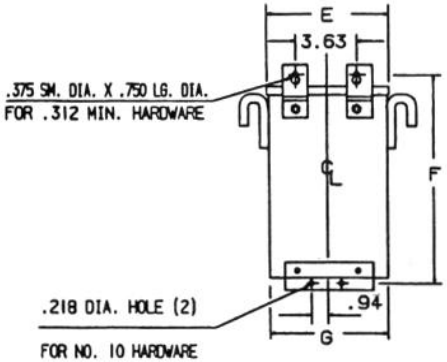

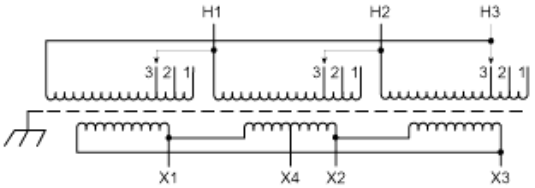

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
480	H1, H2, H3	1	
456	H1, H2, H3	2	
432	H1, H2, H3	3	
Secondary Volts			
240			X1, X2, X3
120			X1, X4 or X2, X4



BOTTOM

NOTES:

1. KNOCKOUTS:
   1.69 DIA. FOR 1.25 CONDUIT
   1.13 DIA. FOR .75 CONDUIT

KVA	CATALOG NUMBER	VOLTAGE HIGH	VOLTAGE LOW	NEMA RATING	WEIGHT	PHASE	FREQ.
9.0	**T-2A-53340-1S**	480Δ	240Δ/120	3R	180 Lbs	3ϕ	60 Hz

	A	B	C	D	E	F	G	H
	17.77	15.28	11.17	12.71	15.27	14.03	15.15	11.52

Revisions

ACME ELECTRIC

Type No.

DATE: June 16, 2010

					A	PRINTS TO	CONTROL 7