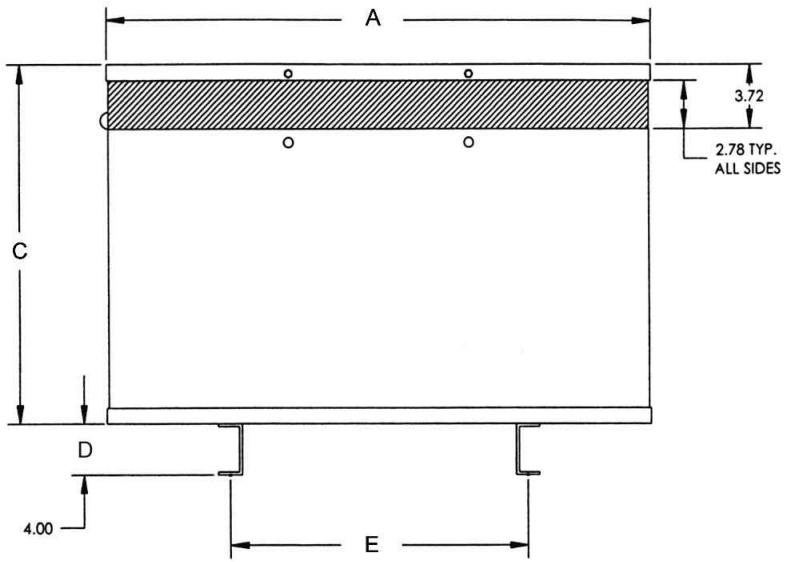

NOTES:
1. DENOTES CONDUIT AREA.

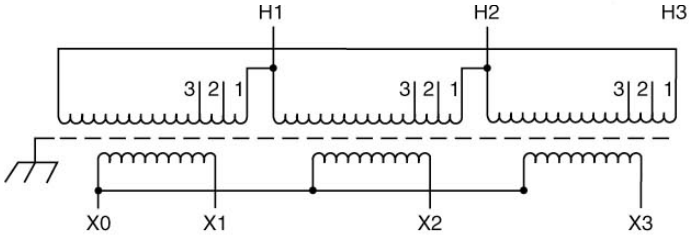

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
480	H1, H2, H3	1	
456	H1, H2, H3	2	
432	H1, H2, H3	3	
Secondary Volts			
208			X1, X2, X3
120 1 phase			X1 to X0 X2 to X0 X3 to X0

KVA	CATALOG NUMBER	VOLTAGE HIGH	VOLTAGE LOW	Enclosure	WEIGHT	PHASE	FREQ.
15	**T-3-53311-1S**	480Δ	208Y/120	NEMA-3R	250 Lbs	3ϕ	60 Hz

	A	B	C	D	E	F
(In.)	20.30	9.03	14.86	4.00	13.25	7.00

Revisions

ACME ELECTRIC

CD SHEET

Type No. T-3-53311-1S

DRAWN: ADR

DESIGN

CHK. APP.

MAT'L

FINISH

SCALE SHEET

					A	PRINTS TO	CONTROL 7