
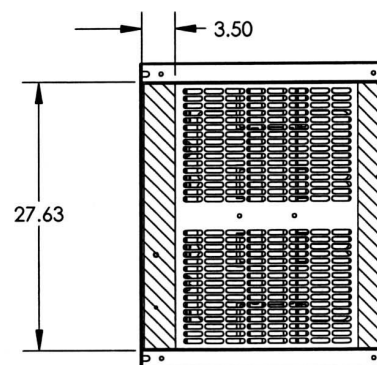
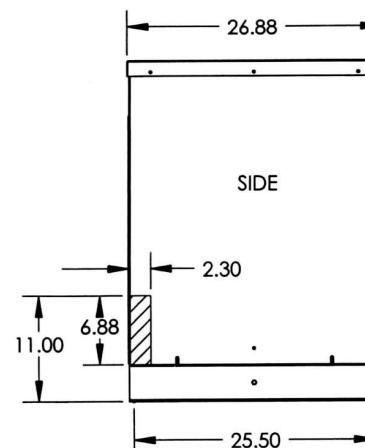
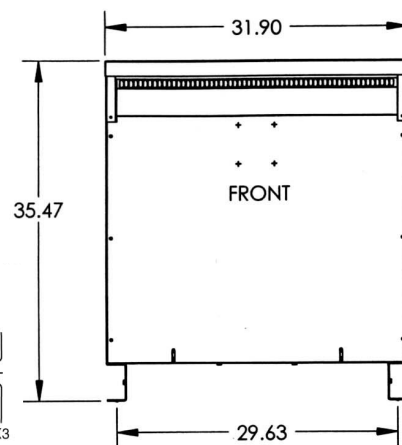


Diagram 1

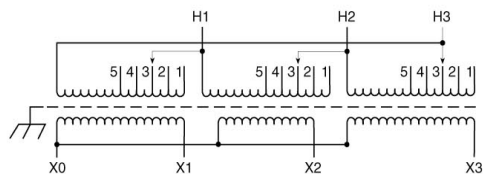

Primary Volts	%	Connect Leads to Tap No.
218	105	1
213	102.5	2
208	100	3
203	97.5	4
198	95	5
Secondary Volts		
208		X1, X2, X3
120		X1 & X0
1 phase		X2 & X0
		X3 & X0

KVA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
75	TPNS-0179274-4S	208	208Y/120	1		3	60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	50 dB

Windings	AL
NEMA Standard	TP1

Impedance	
K-Factor	13

Typical Effic.@35%	
No Load Losses	
Full Load Losses	

Revisions



Type No.

A

PRINTS TO

CONTROL 7