


Catalog Number: MC0816B1200JLT

Features and Ratings




- 200A Cont. Type HQ Lever Bypass Meter Socket
- Ringless Meter Cover, 5th Jaw Installed at 9 o'Clock
- 1 Phase, 3 Wire, 120/240V AC Max
- 8 Spaces, 16 Ckts Max
- 200A Main Breaker factory installed
- Feed-Thru Terminals
- Overhead or Underground Service Entrance
- 22,000 AIC Max. Rated (See Diagram for Details)
- RX Type Hubs Top End Wall
- HC Type Hubs Bottom End Wall
- 7/8" Barrel Lock Provision

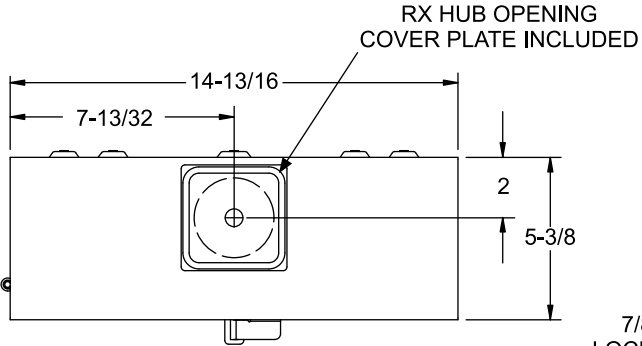




7/8" BARREL
LOCK PROVISION

HQ LEVER
BYPASS


Schematic,
Torques & Wire Sizes

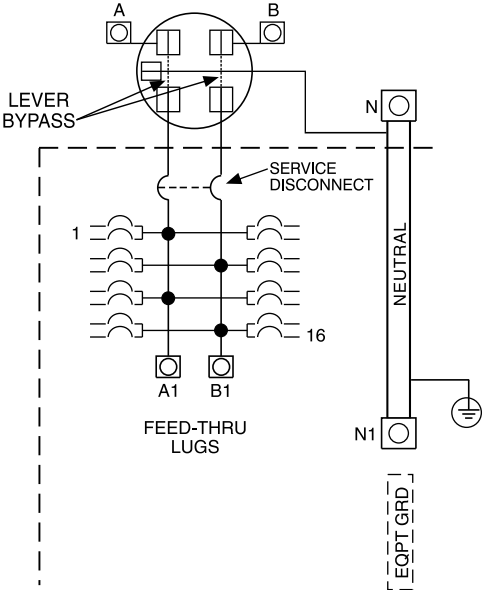

Terminal	Wire Size	Torque
A, B	250kcmil - #4	275 lb-in
N	250kcmil - #4	250 lb-in
Branch Breaker Terminals	See Markings on Breaker	
Neutral Bar	#10 - #14 CU	20 lb-in
	#10 - #12 AL	20 lb-in
	#8	25 lb-in
	#6 - #4	35 lb-in
Ground Conductors Only	(2) or (3) #14 AWG	20 lb-in
	(2) #12-#10 AWG	20 lb-in

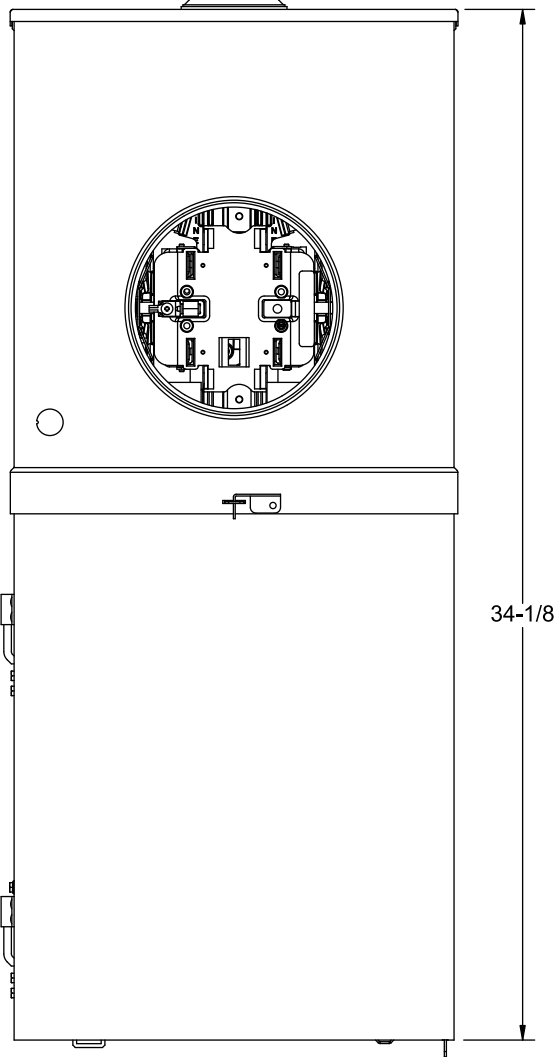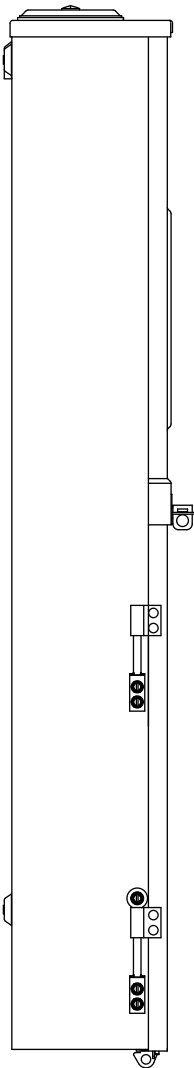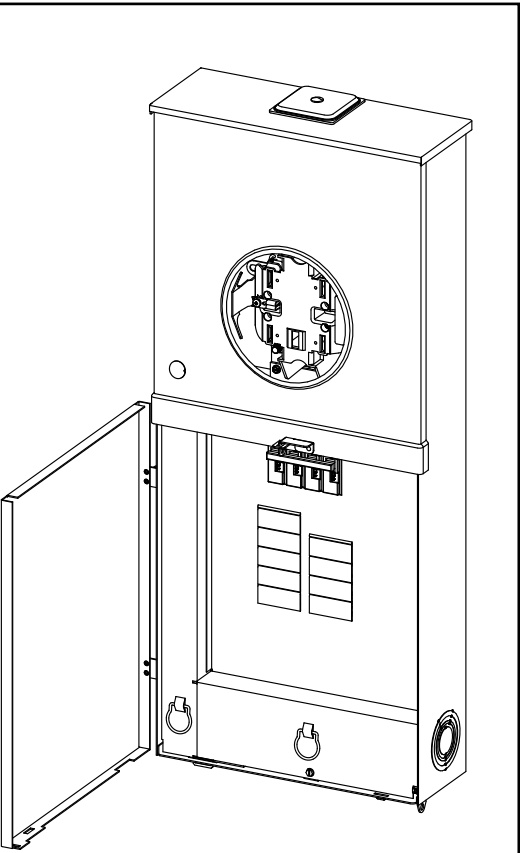

VIEW SHOWN WITH DEADFRONT
AND COVERS REMOVED

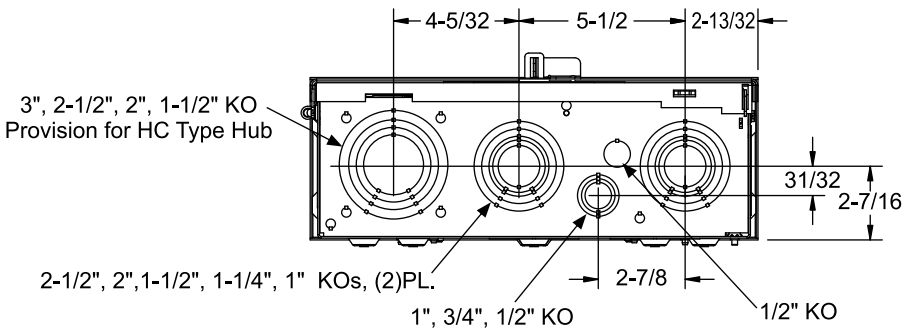

© 2018 Copyright Siemens Industry, Inc.

SIEMENS
Siemens Industry, Inc.

Meter/Breaker Combination

Description:
200A, 0816, B/L, HQ Lever Bypass Feed-Thru

KAM 5/1/18 Fam T DO NOT SCALE Dwg. No. **MC0816B1200JLT**