


# HLA Series Hazardous Location Fan Forced Unit Heater

## Factory Installed Accessories & Physical Dimensions

SUFFIX	DESCRIPTION	LIST ADDER
T	In-Built single pole thermostat 50° - 90° F	318
120	Control transformer w/ primary fusing (Delete 24 suffix - add 120)	228
208	208/240V Control available on 208/240V units (Delete 24 suffix and add 208 OR 240)	Subtract
240		63
D	Disconnect Switch	1574
P	Pilot Light	882

MODEL	A	B	C		D	E	F	G
			3 ph.	1 ph.				
HLA 12	17 3/4	22 3/8	19 3/4	20 5/8	16 1/4	10 1/2	14	3
HLA 16	20 3/4	26 3/8	20 3/4	21 5/8	20 1/4	11 1/2	18	4
HLA 20	24 3/4	30 3/8	22 1/2	N/A	24 1/4	12 1/2	22	4 1/2

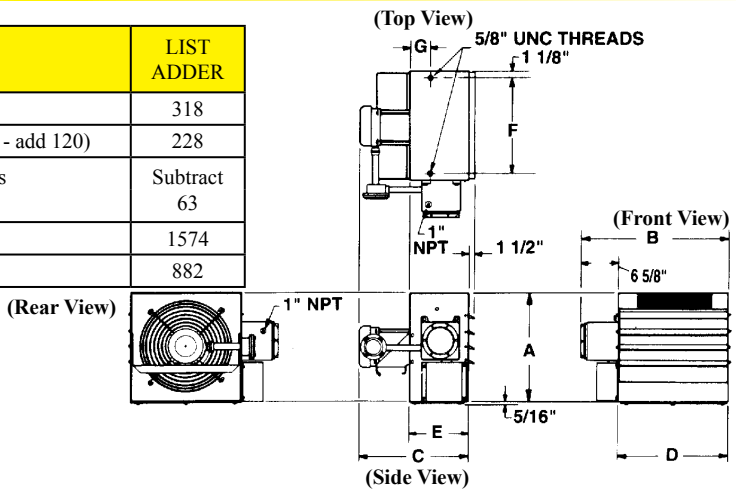

# PHLA Series Portable Hazardous Location Fan Forced Unit Heater



- 3.0 through 25 KW rating
- 208, 240, 480, 600 Volt available in selected capacities
- Cart has anti-static wheels to reduce the risk of static discharge
- Wheeled cart allows for easy maneuverability
- Cart has integrated fork-lift channels to provide ease of lifting on to ramps or trucks
- Excellent for providing seasonal heating in hazardous environments
- All units have disconnect switch, pilot light, and thermostat - standard
- 24 Volt control, transformer, and contactor in NEMA 7 enclosure
- Durable epoxy coating on heater housing
- Hazardous location unit mounted male / female plug
- Adjustable louvers; manual reset

## Standard Portable Hazardous Location Models

UPC #	MODEL	KW	BTU	VOLTS	PH	AMPS	TEMP RISE F	AIR THROW	CFM	WT	LIST
686334											
739344	PHLA12-208160-3.0-24-TDP	3	10,250	208	1	16.3	16.5	24'	580	167	19,950
739337	PHLA12-208360-3.0-24-TDP			208	3	9.8					
739320	PHLA12-240160-3.0-24-TDP			240	1	14.8					
739313	PHLA12-240360-3.0-24-TDP			240	3	8.6					
739306	PHLA12-480360-3.0-24-TDP			480	3	4.3					
739436	PHLA12-600360-3.0-24-TDP			600	3	3.5					
739290	PHLA12-208160-5.0-24-TDP	5	17,100	208	1	26	27.6	24'	580	167	20,300
739283	PHLA12-208360-5.0-24-TDP			208	3	15.4					
739276	PHLA12-240160-5.0-24-TDP			240	1	23.1					
739269	PHLA12-240360-5.0-24-TDP			240	3	13.4					
739252	PHLA12-480360-5.0-24-TDP			480	3	6.7					
739429	PHLA12-600360-5.0-24-TDP			600	3	5.4					
739245	PHLA12-208160-7.5-24-TDP	7.5	25,600	208	1	38	41.4	24'	580	167	20,700
739238	PHLA12-208360-7.5-24-TDP			208	3	22.3					
739221	PHLA12-240160-7.5-24-TDP			240	1	33.6					
739214	PHLA12-240360-7.5-24-TDP			240	3	19.4					
739207	PHLA12-480360-7.5-24-TDP			480	3	9.7					
739412	PHLA12-600360-7.5-24-TDP			600	3	7.8					
739191	PHLA16-208360-10.0-24-TDP	10	34,150	208	3	29.3	21.7	40'	1500	193	22,400
739184	PHLA16-240160-10.0-24-TDP			240	1	44					
739177	PHLA16-240360-10.0-24-TDP			240	3	25.5					
739160	PHLA16-480360-10.0-24-TDP			480	3	12.7					
739405	PHLA16-600360-10.0-24-TDP			600	3	10.2					
739153	PHLA20-208360-15.0-24-TDP			208	3	43.5					
739146	PHLA20-240360-15.0-24-TDP	15	51,200	240	3	38.1	19.2	43'	2450	193	24,140
739139	PHLA20-480360-15.0-24-TDP			480	3	19					
739399	PHLA20-600360-15.0-24-TDP			600	3	15.2					
739122	PHLA20-480360-20.0-24-TDP	20	68,300	480	3	25.1	26.2	43'	2450	225	24,600
739382	PHLA20-600360-20.0-24-TDP			600	3	20					
739115	PHLA20-480360-25.0-24-TDP	25	85,400	480	3	31.1	32.8	43'	2450	225	25,400
739375	PHLA20-600360-25.0-24-TDP			600	3	24.9					

Note: Products listed in this section are custom built and subject to 100% cancellation/restock charges.