

**3-Way CFL SpringLamps®**

10,000 Hours average rated life, 120 V

**Applications:**

**Perfect for all 3-WAY applications:** Use where a standard incandescent is used.

- + Table Lamps
- + Floor Lamps





**Special Application Options: (Ordering Suffix)**

- 3000°K (30K), 3500°K (35K), 4100°K (41K), 5000°K (50K), 6500°K (65K)

**Features and Benefits**

- Excellent energy saving choice for 3-way table and floor lamps
- Provides great light output and color rendition
- All products feature 3 distinct light levels
- Lowest level can be used for night light applications
- 19030LED night light level uses only 1 watt
- 19027 small MOL perfect for small lamp harps

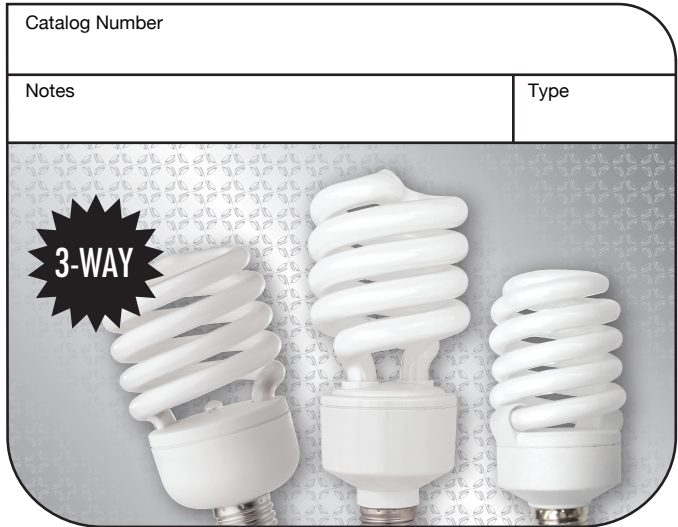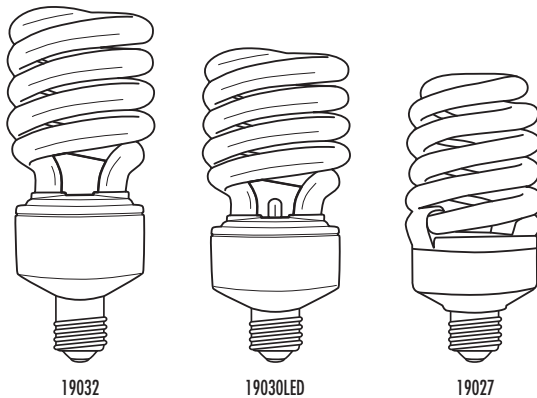

**Specifications ( at full brightness )**

End of Life Protection .....	Yes
Ballast Type .....	Electronic
Input Line Voltage: .....	120VAC
Input Line Frequency .....	50/60HZ
Lamp Life (Rated) .....	10,000 hrs
Color Temperature .....	2700°K
Color Rendering Index .....	82
Minimum Starting Temp .....	0°F
Maximum Operating Temp.....	140°F
UL/cUL Listed .....	Yes
Lamp Operating Frequency .....	45 KHZ
Lamp Current Crest Factor .....	<1.60
Maximum Open Circuit Voltage .....	600V
Power Factor .....	>.50
Total Harmonic Distortion .....	<150%

TCP reserves the right to void the warranty for any misapplication of these products.

Warranties and Certifications:	Item #	Description	Wattage	Incandescent Wattage Comparison	Initial Lumens	M.O.L. (inches)	Diameter (inches)	Input Line Current
<b>18 MONTH WARRANTY</b>  	19027	3-Way Full SpringLamp	11/15/27	40/60/100	500/850/1750	5.2	2.4	.45A
	19030LED	3-Way SpringLamp w/LED night light	1/19/30	night light/75/120	1/1300/1850	5.3	2.8	.50A
	19032	3-Way SpringLamp	14/19/32	40/75/150	750/1400/2150	6.8	2.8	.53A

Item #	Description	Wattage	Incandescent Wattage Comparison	Initial Lumens	M.O.L. (inches)	Diameter (inches)	Input Line Current
19027	3-Way Full SpringLamp, 2700K	11/15/27	40/60/100	500/850/1750	5.2	2.4	.45A
1902735K	3-Way Full SpringLamp, 3500K	11/15/27	40/60/100	450/800/1700	5.2	2.4	.45A
1902741K	3-Way Full SpringLamp, 4100K	11/15/27	40/60/100	450/800/1700	5.2	2.4	.45A
1902750K	3-Way Full SpringLamp, 5000K	11/15/27	40/60/100	450/800/1700	5.2	2.4	.45A
19030LED	3-Way SpringLamp w/LED night light	1/19/30	night light/75/120	8/1300/1850	5.3	2.8	.50A
19032	3-Way SpringLamp, 2700K	14/19/32	40/75/150	750/1400/2150	6.8	2.8	.53A
1903231K	3-Way SpringLamp, 3100K	14/19/32	40/75/150	750/1400/2150	6.8	2.8	.53A
1903235K	3-Way SpringLamp, 3500K	14/19/32	40/75/150	700/1350/2100	6.8	2.8	.53A
1903241K	3-Way SpringLamp, 4100K	14/19/32	40/75/150	700/1350/2100	6.8	2.8	.53A
1903251K	3-Way SpringLamp, 5100K	14/19/32	40/75/150	700/1350/2100	6.8	2.8	.53A
1903265K	3-Way SpringLamp, 6500K	14/19/32	40/75/150	650/1300/2050	6.8	2.8	.53A