



CR Series LED Downlights

# Easy to Install with Unprecedented Payback

THE QUALITY YOU DEMAND WITH THE SAVINGS YOU DESERVE.

**CREE** 

## Accessory Information

### SNAP-IN TRIMS (Only available for CR6™)

Snap-in Trim Kits are available in four standard color options.



**CT6A**  
Silver  
Diffuse Finish  
Reflector



**CT6AW**  
Wheat  
Diffuse Finish  
Reflector



**CT6AB**  
Black  
Diffuse Finish  
Reflector



**CT6BB**  
Flat Black  
Diffuse Finish  
Reflector



**CR6 Installed**

### 6" HOUSINGS (Only available for CR6™, CR6™ FD and LR6™)

The CR6™ downlights fit into a variety of housings from Cree and other manufacturers.



**H6 Series**  
Specification-Grade  
Housing



**RC6 Series**  
Commercial-Grade  
Housing



**RR6 Series**  
Retrofit Housing

### 6" MOUNTING KITS (Only available for CR6™, CR6™ FD and LR6™)

The CR6™ downlights fit into a variety of mounting kits for ceiling, pendant or wall mounting.



**SC6**  
Ceiling Mounts



**SC6-WM**  
Wall Mounts




**SC6-CM**  
Cord Mounts

### 6" COMMERCIAL RETROFIT KITS (Only available for CR6™, CR6™ FD and LR6™)

A field-installable kit to transform the existing commercial-grade downlights into housings ready to accept the CR6™ downlights.




**C6**  
Commercial 120V, Edison Base, "Pan" Adaptor Kit



**C6-LSA**  
Commercial 120V or 277V, Hard-Wire, "Pan" Adaptor Kit

## Ordering Information

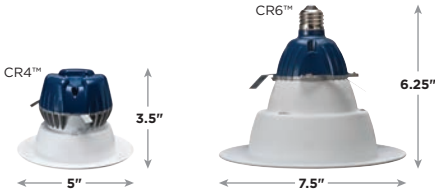


### REPLACES:

- 575L** = 50W BR Incandescent 15W CFL
- 625L** = 65W BR Incandescent 18W CFL
- 800L** = 90W BR Incandescent 26W CFL

### Cree TrueWhite®

Example: **CR6-575L-27K-120V-E26**

SERIES	SIZE	LUMENS	CCT	VOLTAGE/ BASE	BASE TYPE	OPTIONS
CR	4 = 4 inch 6 = 6 inch	575L = 575 Lumens 625L = 625 Lumens** 800L = 800 Lumens**	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	120V - 120 Volts	E26 - Edison Base GU24 - GU24 Base (Title 24 Compliant)	D = Specular Reflector*

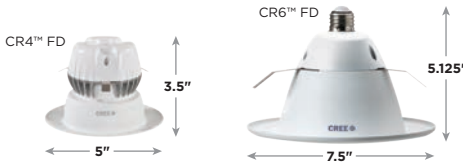

### REPLACES:

- 575L** = 50W BR Incandescent 15W CFL
- 625L** = 65W BR Incandescent 18W CFL

### Full Definition

Example: **CR6-575L-27K-120V-E26-FD**

SERIES	SIZE	LUMENS	CCT	VOLTAGE/ BASE	BASE TYPE	LED TECHNOLOGY
CR	4 = 4 inch 6 = 6 inch	575L = 575 Lumens 625L = 625 Lumens**	27K - 2700K	120V - 120 Volts	E26 - Edison Base GU24 - GU24 Base (Title 24 Compliant)	FD - Full Definition

\*Only available for 4 inch models

\*\* Only available for 6 inch models

Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Extended Product Offering



### LR Series

- Equivalent up to Twin 26W CFL
- 6" aperture with multiple reflector depths
- Efficacy up to 90 LPW
- Up to 1800 lumens at 20W
- Multiple CCTs at 90 CRI
- Dimmable to 5% (120V)
- Available in 120V only



### LR4™

- Equivalent to 50W BR20 Incandescent
- 4" aperture with spun aluminum reflectors
- Efficacy up to 51 LPW
- Up to 540 lumens at 10.5W
- Multiple CCTs at 90 CRI
- Dimmable to 20%
- Available in 120V only



### LE6™

- Equivalent up to 32W Fluorescent
- 6" aperture with adjustable lens
- Efficacy up to 42 LPW
- Up to 500 lumens at 12W
- Multiple CCTs at 90 CRI
- Dimmable to 5% (120V)
- Available in 120V only