


U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-A 16 TS	14.11.2013

These connectors are attractive because of their compact housing.
Small and compact, for applications with high number of contacts



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



Info

Compact, robust metal housings size H-A 16

Application range

Machine and equipment manufacturing
Control engineering
Electronic laboratory

Product features

Hood, low version
Bolts for single lever
Side cable entry
Versions with neck

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Material:	Housing: powder-coated aluminium alloy, grey Sealing: NBR
Protection rating:	IP 65 (latched)
Temperature range:	-40 °C to +100 °C, short-term up to +125 °C


Product Management	Document: LAPP_PRO397EN.pdf	1 / 3
--------------------	-----------------------------	-------




EPIC® H-A 16 TS

14.11.2013

Part number	Article	M	PG	Neck	Pieces / PU
H-A housing: hood (side cable entry, bolts for single lever)					
10564000	H-A 16 TS 16		16	yes	5
10564500	H-A 16 TS 21		21	yes	5
19564000	H-A 16 TS M20	20		yes	5
19564500	H-A 16 TS M25	25		yes	5

U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-A 16 TS	14.11.2013

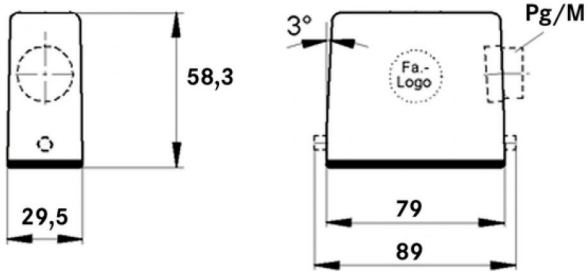

Product Management	Document: LAPP_PRO397EN.pdf	3 / 3
--------------------	-----------------------------	-------