


| | | |
|-------------------|----------------------------|--|
| U.I. Lapp GmbH | PRODUCT INFORMATION |  |
| | EPIC® H-B 16 AG-LB | 14.11.2013 |

Housing design H-B. The industry standard.
The housing standard. Wide choice for all applications



Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Universal, robust metal housings size H-B 16

Application range

Plant engineering
Light & sound technology
Plastics industry

Product features

Panel-mount base
Single lever
Included: flat gasket

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

| | |
|--------------------|--|
| Material: | Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR |
| Protection rating: | IP 65 (latched) |
| Temperature range: | -40 °C to +100 °C, short-term up to +125 °C |


| | | |
|--------------------|-----------------------------|-------|
| Product Management | Document: LAPP_PRO422EN.pdf | 1 / 3 |
|--------------------|-----------------------------|-------|




EPIC® H-B 16 AG-LB

14.11.2013

| Part number | Article | Pieces / PU |
|--|--------------|-------------|
| H-B housing: panel-mount base (single lever) | | |
| 10072900 | H-B 16 AG-LB | 5 |

| | | |
|-------------------|----------------------------|--|
| U.I. Lapp GmbH | PRODUCT INFORMATION |  |
| | EPIC® H-B 16 AG-LB | 14.11.2013 |

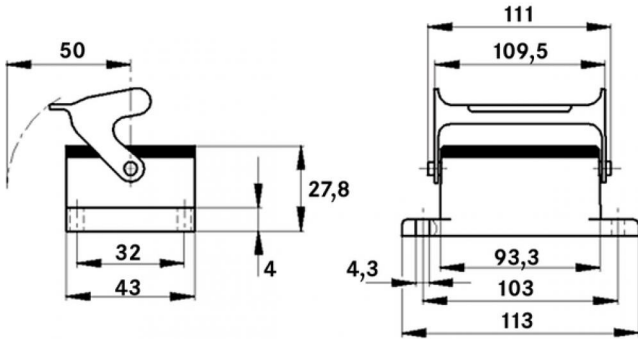

| | | |
|--------------------|-----------------------------|-------|
| Product Management | Document: LAPP_PRO422EN.pdf | 3 / 3 |
|--------------------|-----------------------------|-------|