

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>EPIC® H-B 48 TG</b>	<b>14.11.2013</b>

Housing design H-B for 2 inserts.

The large, robust housing for two inserts in one connector. Power and data in a single connector



### Application range

Plant engineering  
Plastics industry

### Product features

Hood  
Bolts for single lever  
Straight cable entry  
Versions with / without neck

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

### Technical Data

Material:


Housing: aluminium alloy, grey  
Lever: zinc-plated steel  
Sealing: NBR

Protection rating:

IP 65 (latched)

Temperature range:


-40 °C to +100 °C, short-term up to +125 °C

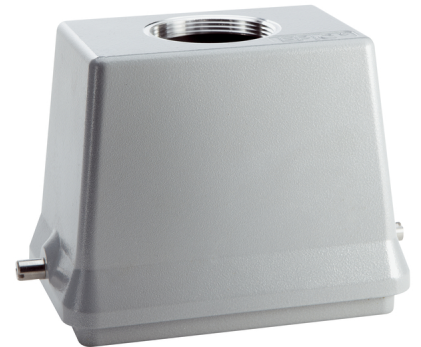


Product Management	Document: LAPP_PRO110300EN.pdf	1 / 3
--------------------	--------------------------------	-------



Part number	Article	M	PG	Neck	Pieces / PU
H-B housing: hood (straight cable entry, bolts for single lever)					
10155000	H-B 48 TG 29		29	yes	1
10156000	H-B 48 TG 36		36	yes	1
10156200	H-B 48 TG 36		36		1
10157000	H-B 48 TG 42		42	yes	1
19155000	H-B 48 TG M32	32			1
19156000	H-B 48 TG M40	40			1
19157000	H-B 48 TG M50	50			1

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
<b>EPIC® H-B 48 TG</b>		14.11.2013

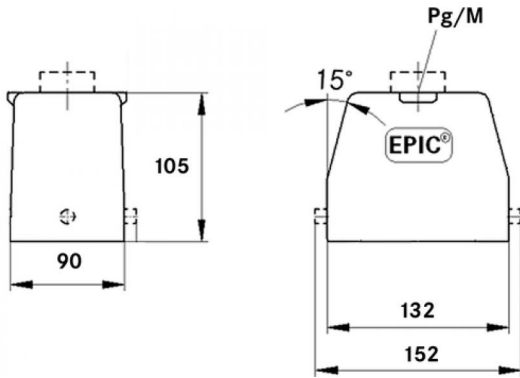

Product Management	Document: LAPP_PRO110300EN.pdf	3 / 3
--------------------	--------------------------------	-------