

U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-BE 32 Screw termination	14.11.2013


Standard inserts with screw termination, crimp termination and cage clamp termination
Standard inserts with screw, crimp and cage clamp termination
The EPIC® H-BE series is suitable for applications that require a reliable connection when working with high voltages and currents



Robust



Temperature-resistant

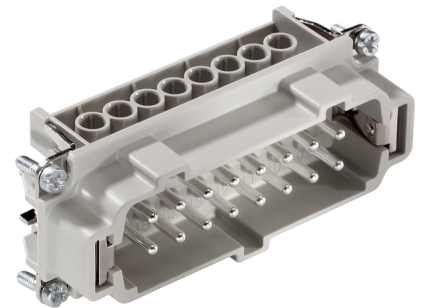

Info

Multifunctional insert for versatile applications
Screw, crimp and cage clamp version - freely combinable

Application range

Mechanical engineering
Light & sound technology
Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Rated voltage (V):	IEC: 500 V UL: 600 V CSA: 600 V
Rated impulse voltage:	6 kV
Rated current (A):	IEC: 16 A UL: 16 A CSA: 16 A
Contact resistance:	< 2 mOhm
Contacts:	Copper alloy, hard silver-plated
Number of contacts:	16 + PE
Termination methods:	Screw termination: 0.5 - 2.5 mm ²
Cycle of mechanical operation:	100
Temperature range:	-40 °C to +100 °C, short-term up to +125 °C
VDE-tested:	Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770
Degree of soiling:	3

Product Management	Document: LAPP_PRO142573EN.pdf	1 / 3
--------------------	--------------------------------	-------





EPIC® H-BE 32 Screw termination

14.11.2013

Part number	Article	Version	Wire protection	Contacts	Pieces / PU
H-BE 32 screw termination					
10202000	H-BE 16 SS	male	yes	17 - 32	5
H-BE 16 screw termination					
10194000	H-BE 16 SS	male	yes	1 -16	5
10195000	H-BE 16 BS	female	yes	1 -16	5
10203000	H-BE 16 BS	female	yes	17 - 32	5
10194100	H-BE 16 SS	male		1 -16	5
10195100	H-BE 16 BS	female		1 -16	5
10202100	H-BE 16 SS	male		17 - 32	5
10203100	H-BE 16 BS	female		17 - 32	5

U.I. Lapp GmbH	PRODUCT INFORMATION	
EPIC® H-BE 32 Screw termination		14.11.2013

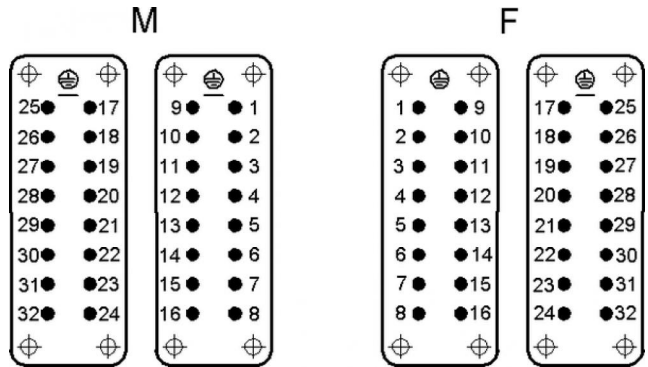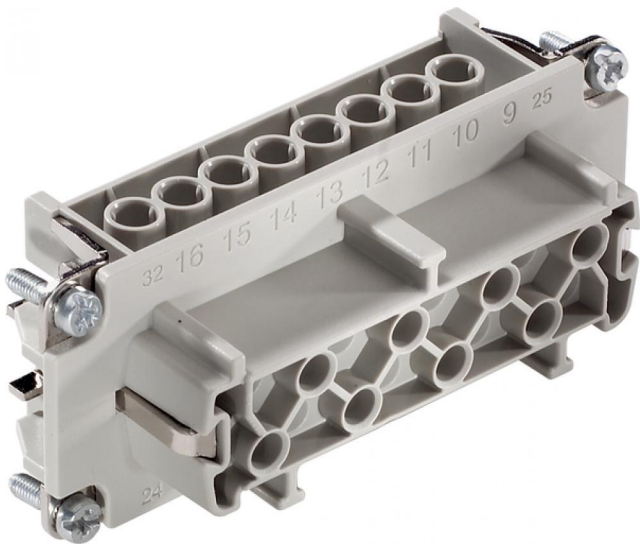

PN 0486/01_03.10 ©2012 Lapp Group - Technical changes reserved
 Photographs are not to scale and do not represent detailed images of the respective products.