


U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>EPIC® H-B 24 TG-RO</b>	<b>14.11.2013</b>

Housing design H-B. The industry standard.  
Ideal for many applications due to a wide range of housings and inserts



Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



#### Info

Universal, robust metal housings size H-B 24

#### Application range

Plant engineering  
Light & sound technology  
Plastics industry

#### Product features

Hood, low version  
Reels for single lever  
Straight cable entry  
Versions with / without neck

#### Remark

Photographs are not to scale and do not represent detailed images of the respective products.


#### Technical Data



Material:	Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched)
Temperature range:	-40 °C to +100 °C, short-term up to +125 °C

Product Management	Document: LAPP_PRO451EN.pdf	1 / 3
--------------------	-----------------------------	-------



Part number	Article	M	PG	Neck	Pieces / PU
H-B housing: hood (straight cable entry, bolts for single lever)					
10121900	H-B 24 TG-RO 21		21	yes	5
10111900	H-B 24 TG-RO 29		29	yes	5
19121900	H-B 24 TG-RO M25	25			5
19111900	H-B 24 TG-RO M32	32			5

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	 <b>LAPP GROUP</b>
	<b>EPIC® H-B 24 TG-RO</b>	14.11.2013

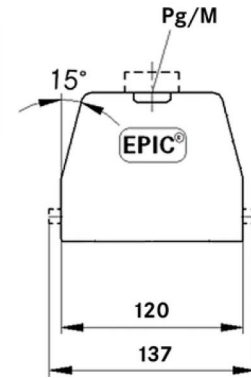

Product Management	Document: LAPP_PRO451EN.pdf	3 / 3
--------------------	-----------------------------	-------