


U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-D 40 stamped	14.11.2013

H-D inserts for stamped and machined crimp contacts
 Inserts of the connector series H-D are designed for applications in which a high number of contacts are required.



Industrial machinery and plant engineering

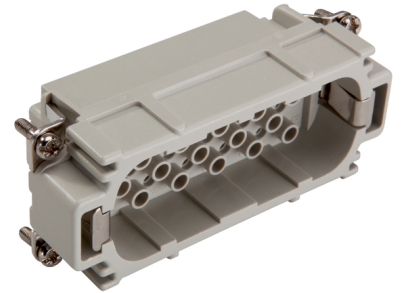

Space requirement

Application range

Plant engineering
 Light & sound technology

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Rated voltage (V):	IEC: 250 V UL: 250 V
Rated impulse voltage:	2.5 kV
Rated current (A):	IEC: 10 A UL: 10 A
Contact resistance:	< 2 mOhm
Contacts:	Copper alloy, hard silver/gold-plated
Number of contacts:	40 + PE
Termination methods:	Crimp termination: 0.14 - 2.5 mm ²
Cycle of mechanical operation:	100
Temperature range:	-40 °C to +100 °C, short-term up to +125 °C
VDE-tested:	UL-tested: UL File Number: E75770
Degree of soiling:	3

Product Management	Document: LAPP_PRO122674EN.pdf	1 / 3
--------------------	--------------------------------	-------




EPIC® H-D 40 stamped

14.11.2013


Part number	Article	Version	Article designation	Contacts	Pieces / PU
11265000	H-D 40 SCG	male	stamped	1 - 40	5
11266000	H-D 40 BCG	female	stamped	1 - 40	5

EPIC® H-D 40 stamped

14.11.2013

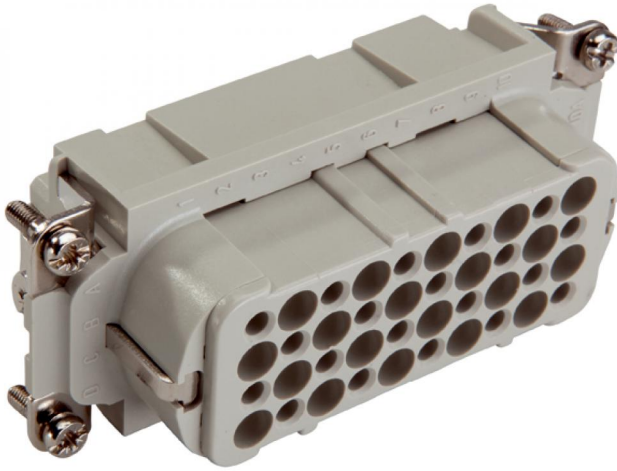

M

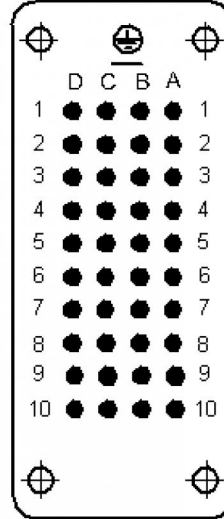

F

