

Switched Disconnects and Enclosures
Circuit-Lock® 30A Disconnects with LED Indicators
Suitable as Motor Disconnects

HUBBELL

Features

- Six highly visible integral phase identification LEDs
- LEDs provide secondary means of visual confirmation of make/break on all phases
- Cover cannot be removed with switch in the "ON" position
- Verification of opening of load side contacts
- Highly visible red handle can be locked in the OFF position as a method of compliance with OSHA Lockout/Tagout requirements

Ordering Information

Description	UPC Number	Catalog Number
Disconnect switch with HBLAC1 auxiliary contact, Non-Metallic	783585567464	HBLDS3PAC

Listings

cULus Listed
 NSF Certified and IP69K Rating

Specifications

Base and Top	PBT
Handle	PBT
Conduit Hub	3/4 in. Zinc
Enclosure Gasket	Neoprene
Frame	Galvanized Steel
Enclosure Screws	Stainless Steel 300 Series
Shaft (Unfused)	PBT
Shaft Seal	Molded Neoprene

Performance


Electrical	
Current Interrupting	Certified for current interrupting at full rated current and voltage
Dielectric Voltage	Withstands 3000V AC minimum
Max. Working Voltage	600V AC RMS
Short Circuit Current Ratings (SCCR): (Motor Disconnect)	Suitable for use on a circuit capable of delivering not more than 65kA RMS symmetrical, 600V AC max. when protected by Class J fuses rated 30A max.

Mechanical

Impact Resistance	In accordance with UL 746C
Mounting	External fully adjustable feet
Terminal Identification	In accordance with UL, CSA and international conventions

Environmental

Flammability	UL94-5VA and V0 Classification
Moisture Resistance	Indoor and Outdoor – Type 4X (Wash down, Corrosion resistant); Indoor – Type 12 (Dust-tight, Falling Dirt, Noncorrosive Liquids).
Operating Temperature	Max. Continuous: 75°C; Min. Continuous: -40°C without impact
UV Resistance	All materials are UV stabilized

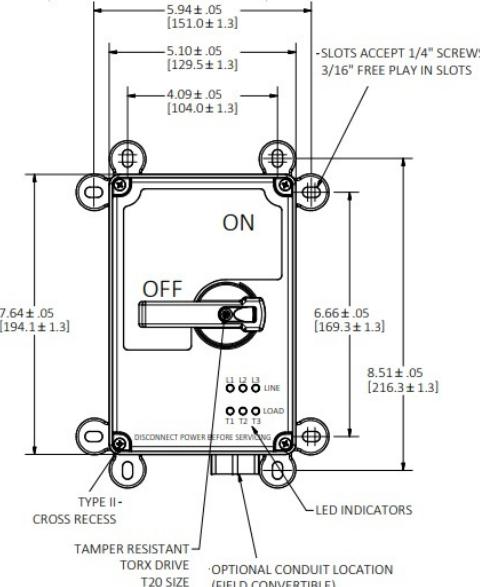

Complementary Products

Replacement Cover	HBLDS3RCP
Auxiliary Contact	HBLAC2

Online Resources

[Customer Use Drawing](#)
[eCatalog](#)
[Installation Instructions](#)