




MILBANK
ENERGY AT WORK

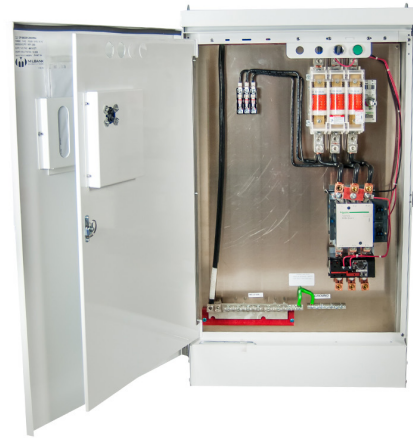

CP3B0281UMWIR04

Catalog Number	CP3B0281UMWIR04
Marketing Product Description	Unmetered 200 Amperes 480 Volt Main Circuit-breaker Lug-lug Breakers White Irrigation Size 4 Starter Standard Unit
UPC	784572791855
Length (IN)	17.406
Width (IN)	23.281
Height (IN)	40.313
Brand Name	Milbank
Type	Unmetered Commercial Pedestal
Application	Power Distribution
Standard	UL Listed;Type 3R
Voltage Rating	277/480 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	3 Phase
Frequency Rating	60 Hertz
Size	17.406L x 23.281W x40.313H
Number Of Cutouts	1
Cutout Size	One 200 Ampere Main Breaker
Cable Entry	Underground
Terminal	Single Mechanical

Insulation	No Insulation
Mounting	Pad Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	0 Terminals
Bypass Type	No Bypass
Number of Meter Positions	No Meter Provision
Equipment Ground	Ground Bar
Hub Opening	No Hub Opening
Line Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
Number Of Receptacles	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.