




MILBANK
ENERGY AT WORK

U4362-R-K3-K2-BLG-AEPU

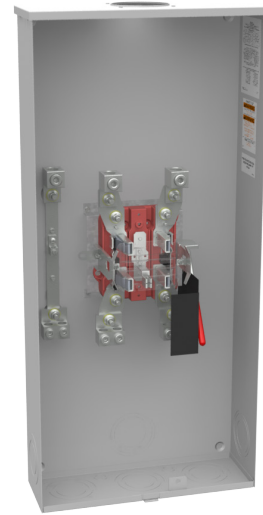

Catalog Number	U4362-R-K3-K2-BLG-AEPU
Marketing Product Description	5 Terminal Ringless Large Hub Open Lever Bypass Single Connector 4-600kcmil Double Connector Locking 6-350kcmil 7-8 In Barrel Lock Ground With Bracket Provision American Electric Power
UPC	784572706323
Length (IN)	6
Width (IN)	17.75
Height (IN)	38.75
Brand Name	Milbank
Type	Ringless Meter Socket
Application	Meter Socket
Standard	UL Listed;Type 3R
Voltage Rating	Up to 600 Volts Alternating Current
Amperage Rating	320 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	6.0 L x 17.75 W x 38.75 H
Number Of Cutouts	0
Cutout Size	No Main Breaker
Cable Entry	Overhead or Underground
Terminal	3/8 Inch Stud

Insulation	Glass Polyester
Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	Lever Bypass
Number of Meter Positions	1 Position
Equipment Ground	Ground Lug
Hub Opening	Large Hub Opening
Barrel Lock Provision	9/16 Inch Knockout and Angle Bracket for Barrel Lock Guard Provision

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.