

Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Replacement Contacts



Ordering Information

Description	Accessory	UPC	Catalog Number
Replacement Female Pin Contact, 400A	Replacement Parts	783585112343	HBL400RCF



Standards


UL and cUL Listed
UL Enclosure Types 3R, 4X, 12
UL 498 and UL1691

Specifications

Product Type	Accessories
Body Material	Thermoplastic Elastomer
Contact Material	Brass
Retaining Screw Material	Nylon

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

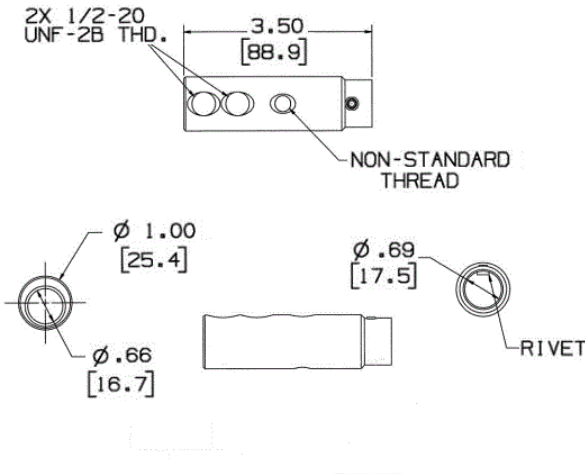

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

