



# Blackburn®

**Insulated Conductor Connectors**  
**T&B Catalog Number:**

**UPC Number:** IPC3535  
**Status:** 78378633114  
**Description:** Active

Type IPC - Talon Insulation Piercing Connector for Conductor Range  
 Main: 350-4/0 AWG, 185-95 MM sq., Tap: 350-4/0 AWG, 185-95 MM sq.

**Features**

For copper-to-copper, copper-to-aluminum and aluminum-to-aluminum applications (insulated conductor only). Performs as splice or tab for non-tension applications up to 600 volts, depending on size of connector.

Self-insulated for hot line applications. Six sizes cover range from #10 to 500 kcmil.

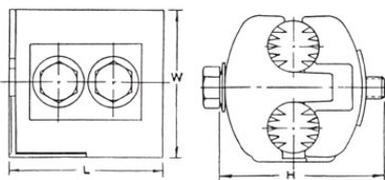


Fig. 2

**General**

Style	Type - IPC Talon Insulation Piercing Connectors
Conductor Range (AL or CU) Main	350-4/0 AWG, 185-95 MM sq.
Conductor Range (AL or CU) Tap	350-4/0 AWG, 185-95 MM sq.
Number of Bolts	2

**Dimension Information**

H (inches)	2 1/2
L (inches)	2 1/8
W (inches)	2 1/16

**Specifications**

Temperature Rating	90°C Max
Voltage Rating	300 Volts Max.

**Packaging**

T&B Inner Pack	12
Package in Units	48
T&B Sold in UOM	Each
T&B Weight Per UOM	106.42 lbs. per 100

**Certifications**

RoHS Compliance	Yes
-----------------	-----

**Certifications**



File Nbr:  
486B

**For further technical assistance, please contact us...**

Thomas & Betts - USA  
 8155 T&B Blvd.  
 Memphis, TN 38125  
 www.tnb.com

T&B Technical Support  
 MS 3B-50  
 8155 T&B Blvd.  
 Memphis, TN 38125

Hours: 7AM - 6PM CDT  
 Monday-Friday  
 Phone: (888) 862-3289  
 Fax: (901) 252-1321  
 Email:techsupport@tnb.com