





FTS FLUTED TAPERED STEEL

21'—41' MOUNTING HEIGHT

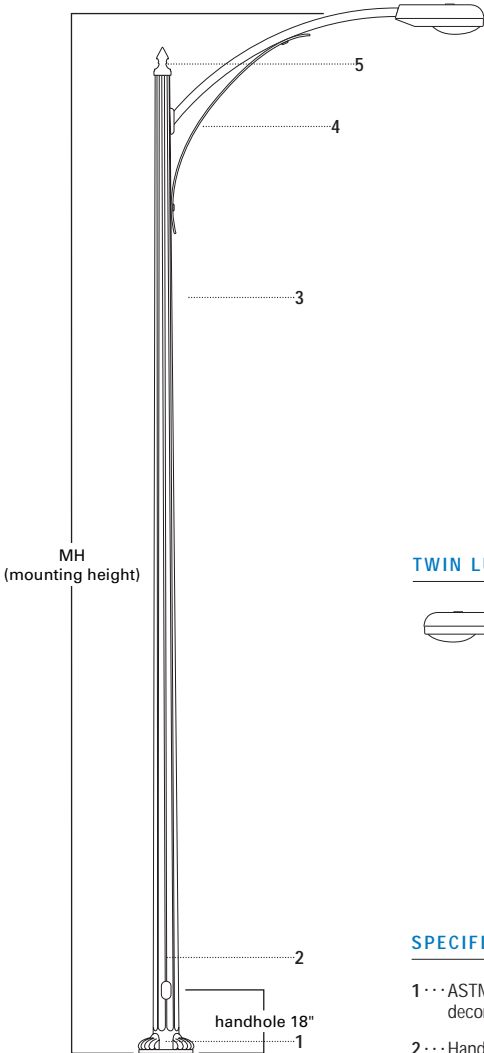

TWIN LUMINAIRE ARMS AVAILABLE

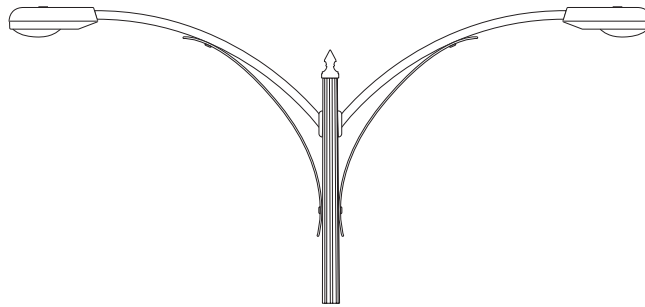

SPECIFICATION FEATURES

- 1... ASTM Grade steel base plate. Pole provided with decorative cast aluminum nut covers.
- 2... Hand hole assembly 4" x 6".
- 3... ASTM 595 steel fluted shaft. Pole cross section is an 8' Sharp Flute.
- 4... Luminaire arm is 2.375" tubing available in 4', 6', and 8' lengths. Decorative scroll is attached to the underside and to the pole with hex head bolts.
- 5... Decorative cast aluminum pole cap attached using three (3) set screws.
- 6... Anchor bolt per ASTM A576 with (2) nuts, (2) flat washer, and (1) lock washer. Nuts, washers and threaded portion of bolt are hot dip galvanized 3" hook for 3/4" bolt. 4" hook for 1" bolt.

FOUR BOLT ANCHORAGE [See ordering information]

- BC=Bolt Circle
- BP=Bolt Projection
- AB=Bolt Dimensions
- D=Bolt Diameter
- H=Bolt Dimensions

FINISH COLORS [See ordering information]

- F=Dark Bronze
- S=Silver
- V=Grey
- W=White
- Y=Black

WARNING: THE USE OF UNAUTHORIZED ACCESSORIES SUCH AS BANNERS, SIGNS OR PENNANTS FOR WHICH THE POLE WAS NOT DESIGNED FOR VOIDS THE COOPER LIGHTING WARRANTY AND MAY RESULT IN POLE FAILURE CAUSING SERIOUS INJURY OR PROPERTY DAMAGE. COOPER LIGHTING'S POLE WARRANTY IS ALSO VOIDED IF LUMINAIRE IS NOT INSTALLED AT TIME OF POLE INSTALLATION.