

VerifEye™ Series 8000 Meter

Multiple Point High Density Smart Meter



DEFINITION

The VerifEye™ Series 8000 Multiple Point Meters are designed to meter multi-tenant office buildings, medium-sized retail, institutional, multi-tenant residential and other high density applications. VerifEye Series 8000 meters provide twenty-four meter elements that can be configured as any combination of 1 phase, 2 phase or 3 phase meters or monitors.

VerifEye Series 8000 meters combine revenue-grade electrical submetering with building automation communications technology, complying with all regulatory electric safety and communications requirements and meeting stringent ANSI 0.5 Accuracy Class standards.


VerifEye Series 8000 meters transmit data over ModBus and BACnet™ connections to form an open protocol network.

FEATURES

- Building automation integration and tenant metering
- Multiple point meter—installation and hardware-savings
- Can monitor as low as 20A
- Provides multiple electric loads in one device
- Monitors up to 24 current transformers—8 (3) phase, 12 (2) phase or 24 single phase loads
- 100 - 5,000 amp current transformers
- ModBus TCP, ModBus RTU (RS-485) and BACnet IP standard feature
- Measures kilowatt hours, kW demand, volts, amps
- Interval and net metering
- Configurable via Ethernet or simple ModBus RTU network to BMS or VerifEye software solutions for tenant billing or measurement & verification (M&V)

PRODUCT DATA

DIMENSIONS

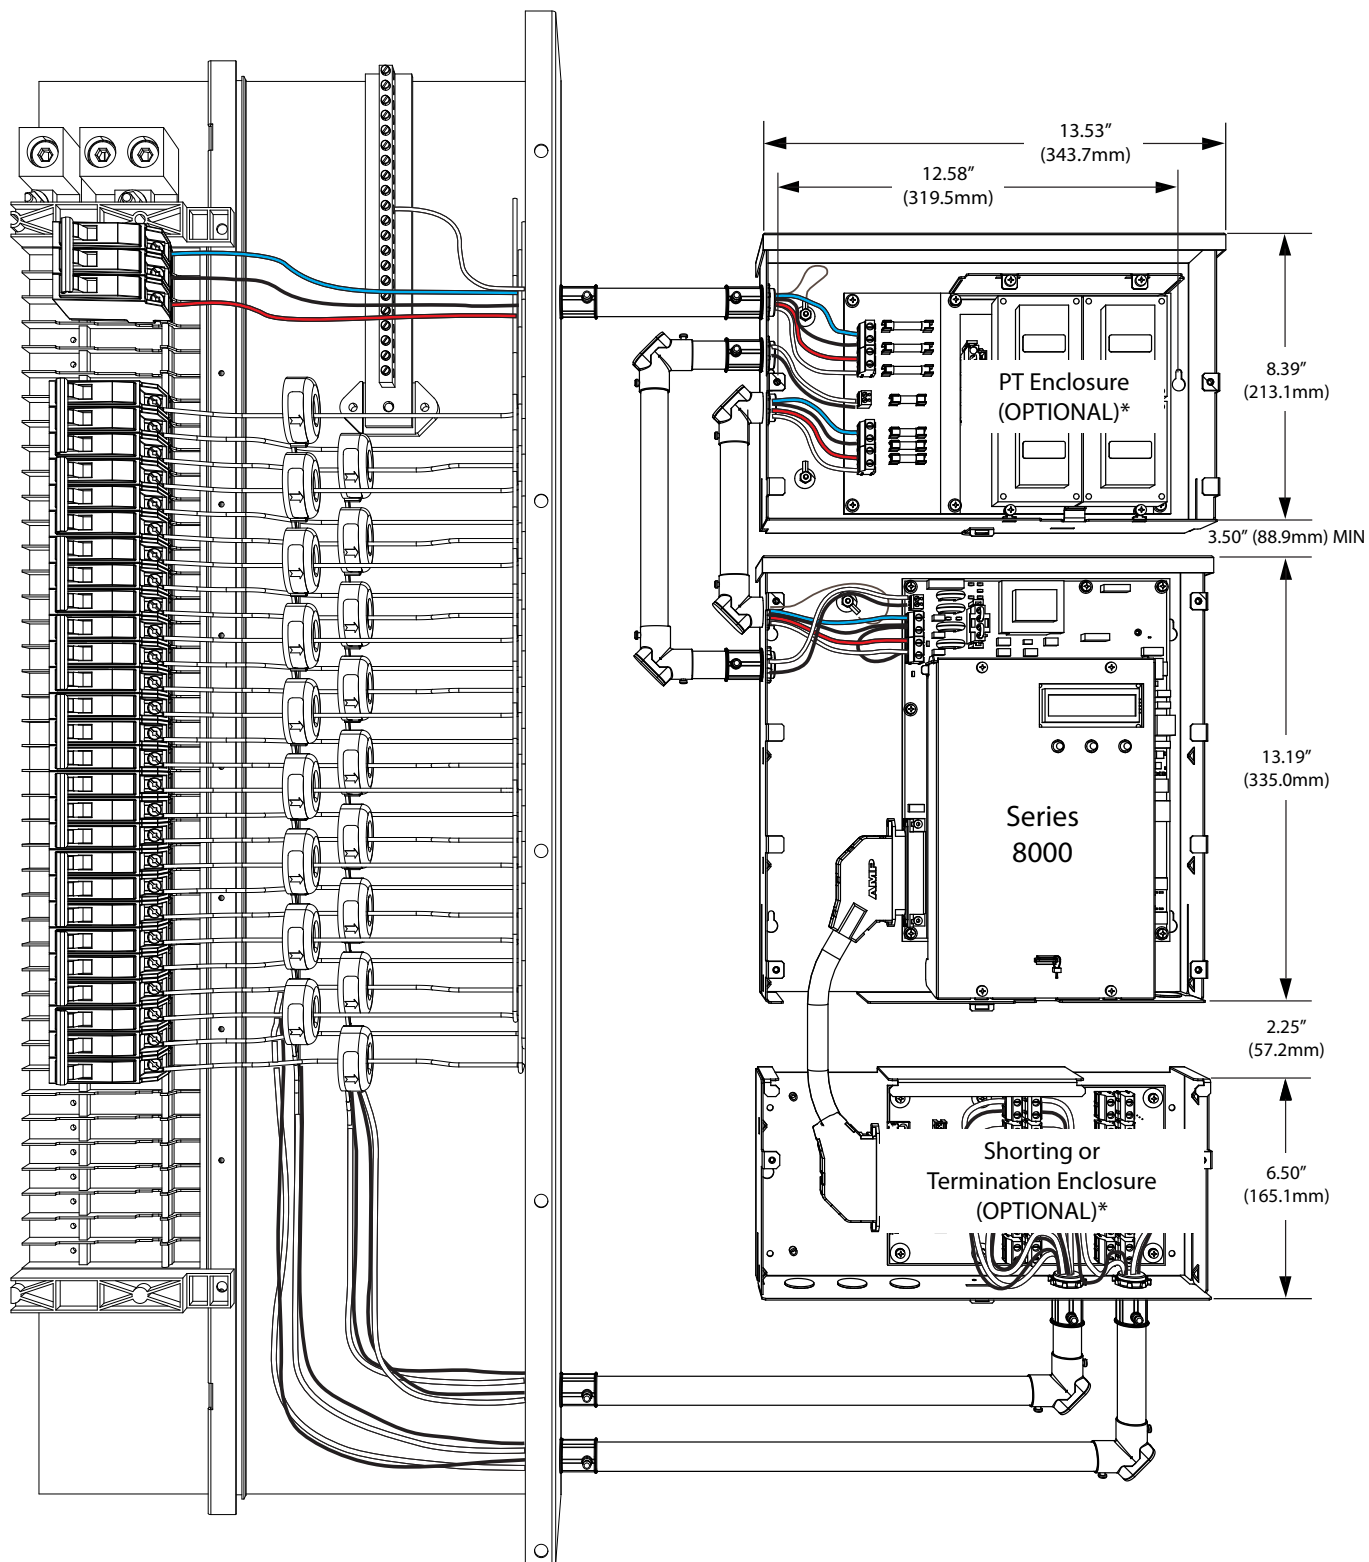

* PT Enclosure and Shorting or Termination Enclosure are optional for select applications.

SPECIFICATIONS

COMMUNICATION	
Protocols	ModBus TCP/IP, DHCP, HTTP, PPP, SNTP, FTP, ModBus TCP, ModBus RTU (RS-485), BACnet IP
VOLTAGE	
Voltage	120/208V, 120/240V, 240/416V, 277/480V (Higher voltage supported with potential transformers)
Tolerance	+/- 10%
Wattage	50Hz and 60Hz models
M&V	
Service Type	Single, Poly & 3-Phase + Neutral
Accuracy	ANSI C12.20 0.5 Accuracy Class, IEC 62053-22 Class 0.5S, Measurement Canada Approved
Measurements	Wh delivered and received, VARh delivered and received, VAh, Vrms, Irms
Demand Interval	5 to 60 minutes
Compatibility	2 Pulse inputs to collect data from electric, water and/or gas meters
Ports	Single 10/100BASE-T Ethernet, RS-232
BAS Protocols	ModBus TCP, ModBus RTU (RS485), BACnet/IP
AMR File Type	Human Readable CSV file
Frequency	Configurable; real-time, hourly, or daily reporting
Pulse Inputs	2 pulse in terminal blocks (2 wire) compatible with dry form A and solid state form A contacts
On-Board Memory	Non-volatile flash memory is unaffected by power outages; holds up to 2.4 years of meter data (1 hour intervals) for 20 years
On-Board Clock	Real-time with battery back-up (holds time up to 10 years)
PHYSICAL	
Weight	14 lbs (6.35kg), 21 lbs (9.52Kg)
Size	13" (33cm) H x 11.8" (16.9") (30(43)cm) W x 2" (5cm) D
Enclosure	For indoor use only
Display	Liquid crystal with button scroll
ENVIRONMENT	
Operating Temperature	-40° to 158° F (-40° to 70° C)
Operating Humidity	0 to 90% non-condensing
Altitude	9843 ft (3000m) maximum
Pollution	Degree 2
CODES & STANDARDS	
Emissions	(EMC): FCC Part 15 Class A, ICES-003, IEC6100-4-5
Safety	TUV and UL certified to IEC/EA/UL/CSA - 61010-1 2nd Edition CSA-C22.2 No. 61010-1-04
Surge Power/ Telephone Lines	ANSI/TIA968-A; 2002
Accuracy & Billing	ANSI/C12.20 0.5 Class

Leviton Manufacturing Co., Inc. Global Headquarters

201 N. Service Rd. Melville, NY 11747-3138 • Tech Line: 1-800-824-3005 • Fax: 1-800-832-9538 www.leviton.com
© 2013 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

STEPS FOR ORDERING

1. Determine residential or commercial & industrial applications
2. Determine voltage
3. Determine phase requirements
4. Determine number of meters
5. Choose wiring harness or terminal strips

ORDERING INFORMATION

VOLTAGE	DESCRIPTION	CAT. NO.
RESIDENTIAL		
120/208/240V 1PH 3W	Phase Config 3x2 with Wiring Harness	S8120-032
120/208/240V 1PH 3W	Phase Config 6x2 with Wiring Harness	S8120-062
120/208/240V 1PH 3W	Phase Config 9x2 with Wiring Harness	S8120-092
120/208/240V 1PH 3W	Phase Config 12x2 with Wiring Harness	S8120-122
COMMERCIAL & INDUSTRIAL		
120/208 or 277/480V 3PH	Phase Config 8x3 with Termination Enclosure	S8UTS-083
120/208 or 277/480V 1PH 3W	Phase Config 12x2 with Termination Enclosure	S8UTS-122
120/208 or 277/480V 1PH 3W	Phase Config 24x1 with Termination Enclosure	S8UTS-241
120/208 or 277/480V 3PH	Phase Config 8x3 with Wiring Harness	S8UWH-083
120/208 or 277/480V 1PH 3W	Phase Config 12x2 with Wiring Harness	S8UWH-122
120/208 or 277/480V 1PH 3W	Phase Config 24x1 with Wiring Harness	S8UWH-241
480V Delta	Delta PTs with Enclosure	S480V-011

WIRING HARNESSES vs. TERMINAL STRIPS

• Wiring Harness

S8UWH models are equipped with a 12-foot long, 24-pair wiring harness. One end of the harness is a connector which connects to the meter and the other end is a color-coded, unstripped wire. The unstripped side can be run into a panel and current transformers (CTs) can be spliced into the appropriate color-coded connection on the harness.

• Terminal Strips

S8UTS models include an additional enclosure and terminal strips for connecting each individual current transformer. Each CT is provided with two labeled screw terminals to land the wiring.

Choosing Between a Wiring Harness and Terminal Strips

- Wiring harnesses offer a less labor intensive solution when all CTs are located in one panel like in a multi-family high rise project. This eliminates the need to extend CT wires out of the panel.
- Terminal strips are ideal for installers who prefer to land each wire and not use a color-coded wiring harness. For CTs located in different panels or different locations with a switchboard, terminal strips offer an easier solution with the ability to extend the current transformer wiring back to the meter location for termination. Terminal strip models also carry a slightly higher cost and should be considered with the project budget.

Leviton Manufacturing Co., Inc. Global Headquarters

201 N. Service Rd. Melville, NY 11747-3138 • Tech Line: 1-800-824-3005 • Fax: 1-800-832-9538

Leviton Mfg. Co., Inc. Lighting & Energy Solutions

20497 SW Teton Avenue, Tualatin, OR 97062 • 1-800-736-6682 • Fax: 503-404-5594 • Tech Line (6:00AM-4:00PM P.S.T. Mon-Fri): 1-800-959-6004

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 • Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 • Tel. (+52) 55-5082-1040 • FAX: (+52) 5386-1797 • www.leviton.com.mx

Visit our Website at: www.leviton.com/les

© 2013 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

G-9113A/J13-cds
REV OCT 2013