



Color: White

UPC Code: 07847718056

OSC10-U0W

Brand Features

Microprocessor based, the OSCXX-U has a self adapting feature that compensates for air flow, giving it excellent immunity to air currents and other interference.

Item Description

Occupancy Sensor, Ceiling Mounted, Ultrasonic only, 24VDC, 35mA power consumption, 1000 sq ft, 360 degree (major motion: 46'Lx23'W, minor motion: 34'Lx17'W), green LED, auto adapting, walk-through, time delay 30s-30m, test mode (6s time delay for 15m with auto exit), connect gray wire for photocell ambient light hold-off, 360 degree harmonic wheel (rotatable), mounting height 8'-10', PIR, cUL/NOM/ANCE listed, CEC Title 24 compliant. Color: off-white, NAFTA compliant.


Features and Benefits

- Small Size: Installed sensor appears almost invisible.
- Fast Simple Installation: Easy ceiling mount, three wire connection (low voltage) and twist-lock sensor attachment.
- Accurate, Consistent Switching: Occupant complaints are eliminated; lights are on when room is occupied, off when empty. annoying false-offs are minimized and lights on at night is eliminated.
- Self-Adapting: An internal microprocessor continually analyzes, evaluates and adjusts settings. Performance is kept at a maximum and user complaints are eliminated.
- Maximum Reliability, Low Cost: All digital circuitry uses a minimum of components.
- Non-Volatile Memory: Learned and adjusted settings saved in protected memory. Power outages will not cause status loss.
- Ambient Light Recognition: The photocell prevents lights from turning on when room is adequately lit by natural light.
- Excellent Warranty: 5-Year Limited warranty.
- Typical Applications: Cafeteria, Computer Room, Office w/Cubicles, File Room, Partitioned Restroom, Warehouse Open Area, Work Space General, Workout Facility, Gymnasium, or Hallway

Patents*

CA115944	US7800049
CA122495	USD561630
MX24023	USD573053

*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

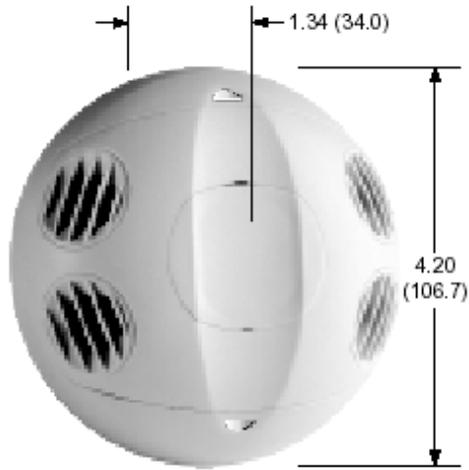

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

