

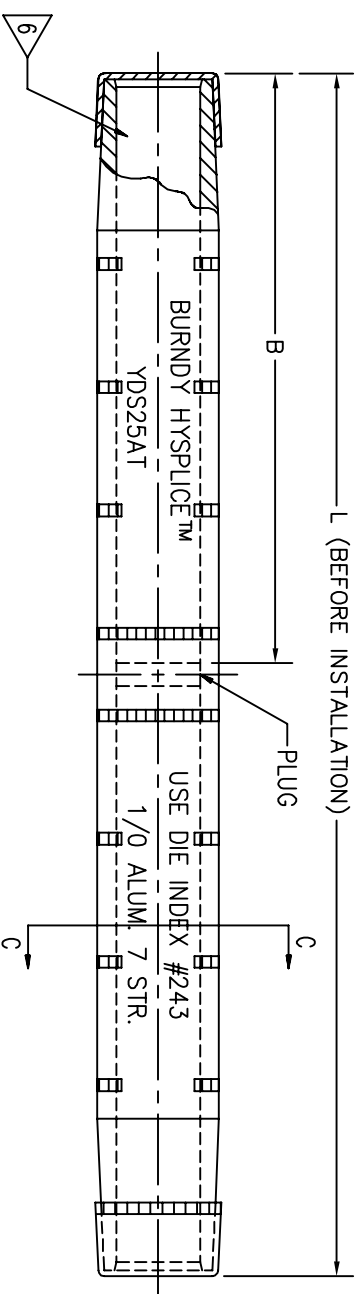


CATALOG NUMBER	CONDUCTORS ALUMINUM CABLE	STR.	O.D.	B	L	TOOL INDEX NO.	INSTALLATION DATA							
							Y34A	Y35/Y750	Y45	Y46	Y48B	Y60BHU	MD6	KEARNEY DIE
YDS1CAT	1 STR. (.328)	7	.54 [14]	4.56 [116]	9.24 [235]	241	A241 (4)	U241 (4)	---	---	---	W-241 (8)	---	
YDS25AT	1/0 STR. (.368)	7	.62 [16]	3.57 [91]	7.27 [185]	243 BG	A243 (3)	U243 (3) UBG (5)	---	---	---	W-243 (6) BG (12)	K5/8 - K5/8-1	
YDS26AT	2/0 STR. (.414)	7	.70 [18]	4.56 [116]	9.24 [235]	245	A245 (4)	U245 (5)	---	---	---	W-245 (9)	K5/8 - K5/8-1	
YDS27AT	3/0 STR. (.464)	7, 19	.77 [20]	3.56 [90]	7.25 [184]	247	A247 (4)	U247 (4)	---	---	---	W-247 (8)	K737	
YDS28AT	214 kcmil (.522) 4/0 STR. (.528) 4/0 ACAR 4/3 STR. (.502) 4/3 STR.	7, 19	.86 [22]	5.17 [131]	10.47 [266]	249	A249 (6)	U249 (6)	---	---	---	W-249 (12)	K840	
YDS29AT	250 kcmil (.574)	19	.92 [23]	3.71 [94]	7.54 [192]	616	A616 (6)	U616 (6)	---	---	---	---	---	
YDS291AT	266.8 kcmil (.586)	7	.97 [25]	4.25 [108]	8.62 [219]	251	A251 (7)	U251 (7)	---	---	---	---	---	
YDS30AT	300 kcmil (.629)	19	1.03 [26]	4.25 [108]	8.62 [219]	322	A322 (7)	U322 (7)	---	---	---	---	---	
YDS301AE	336.4 kcmil (.666)	19	.99 [25]	4.75 [121]	9.62 [244]	251	A251 (8)	U251 (7)	---	---	---	---	---	
YDS301AT	336.4 kcmil (.666) 336.4 COMPT. (.603)	19, 37	1.06 [27]	4.88 [124]	9.88 [251]	321, 705, 655	A321 (8)	U321 (8) U655 (8) U705 (4)	---	---	---	---	K1-1/8-1	
YDS311AT	397.5 kcmil (.724)	19	1.19 [30]	6.05 [154]	12.22 [310]	468	---	U468 (10)	---	---	---	---	---	
YDS321AT	428 kcmil (.755)	19	1.19 [30]	6.25 [159]	12.62 [321]	316	---	U316 (9)	---	---	---	---	---	
YDS331AT	477 kcmil (.793) 477 kcmil (.793) 477 COMPT. (.722)	19, 37, 19	1.30 [33]	6.30 [160]	12.73 [323]	317	---	U317 (9)	---	---	---	---	K1-1/8-1 K1-1/4	
YDS351AT	556.5 kcmil (.858)	19, 37	1.39 [35]	6.30 [160]	12.73 [323]	318	---	U261 (9)	---	---	---	---	---	
YDS361AT	636 kcmil (.918)	37	1.50 [38]	6.67 [169]	13.47 [342]	469	---	U261 (8)	---	---	---	---	---	
YDS391AT	795 kcmil (1.026) 800 kcmil (1.031)	37, 61, 91	1.67 [42]	6.72 [171]	13.56 [344]	342	---	U261 (8)	---	---	---	---	K1-1/2	
YDS425ATCG1	927 kcmil (1.108)	37	1.84 [47]	8.38 [213]	17.56 [446]	352 579	---	U261 (10) P579 (10)	---	---	---	---	---	
YDS28ATG4	3/0 ACAR (.502)	4/3	.86 [22]	5.17 [131]	10.47 [266]	249	A249 (6)	U249 (6)	---	---	---	W-249 (12)	K840	

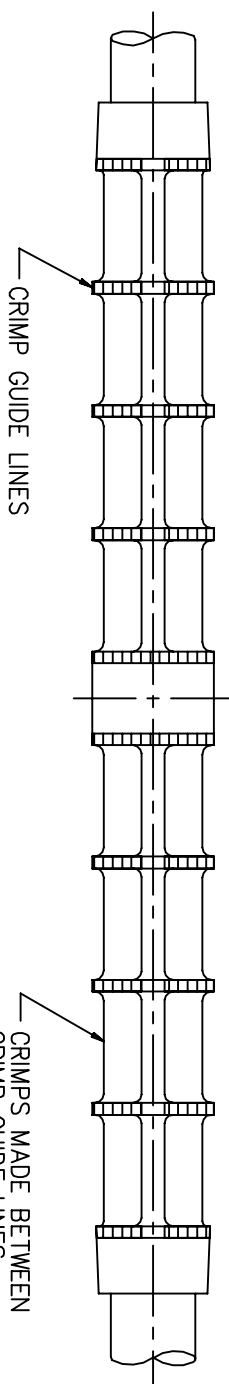

VIEW BEFORE INSTALLATION



VIEW AFTER INSTALLATION

HYPSPlice™ TENSION (ALL AL.)

ITEM NO: ---

CAT NO: YDA-AE, YDS-AT, YDS-ATG, YDS-ATG1

SCALE: N/A

DRAWN BY: P.D.

CHECKER: W.C.

DSN APPL: K.BRAIN

WFO APPL: ---

CC APPL: K.CHERYL

PRD FAM: ---

PRD APPL: H.JEFFERSON

PROJ # ---

DOCUM THE SIZE

REL LEVEL: AutoCAD



TO ORDER BURNDY® PRODUCTS CALL
UNITED STATES:
1-800-346-4175 (LONDONDERRY, NH)
CANADA:
1-800-361-6975 (QUEBEC)
1-800-387-6487 (ALL OTHER PROVINCES)
FOR PRODUCT INFO: <http://www.burndy.com>

- NOTES:
- MATERIAL: ALUMINUM TUBING.
 - CAT. NO. P16515 ADAPTER IS REQUIRED IN Y45 SERIES TOOLS.
 - CAT. NO. PUADP-1 ADAPTER IS REQUIRED IN Y46 SERIES TOOLS.
 - FOR USE BY CUSTOMERS THAT HAVE THIS HYPRESS™ NO NEW Y34A HYPRESS™ TOOLS ARE BEING PROCESSED.
 - DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
 - BARRELS PARTIALLY FILLED WITH PENETROX™ AND SEALED.
 - FLAT SIDED.
 - WHEN USING OTHER MANUFACTURER'S TOOLING, CRIMPS MAY OVERLAP OR BE SPACED 1/16" (MAX.) APART.
 - FOR FASTER INSTALLATIONS USE BURNDY PATRIOT FAMILY OF BATTERY TOOLS