

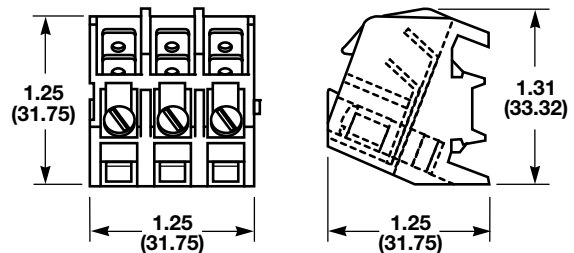
Quick Connect Terminal Blocks

NTQ23**SPECIFICATIONS:**


Rating: 40A, 600V
Center Spacing: 0.390" (9.91mm)
Number of Poles: 3
Circuits Per Foot: 28
Wire Range: AWG #8-22 CU
Screw Size: #8-32
Quick Connects: 0.250" x 0.031"
Mounting Options: C-rail
Marking Tape: MT12-1-2
Torque Rating: 18 lb-in
Operating Temperature: 105°C



Dimensions - in (mm)

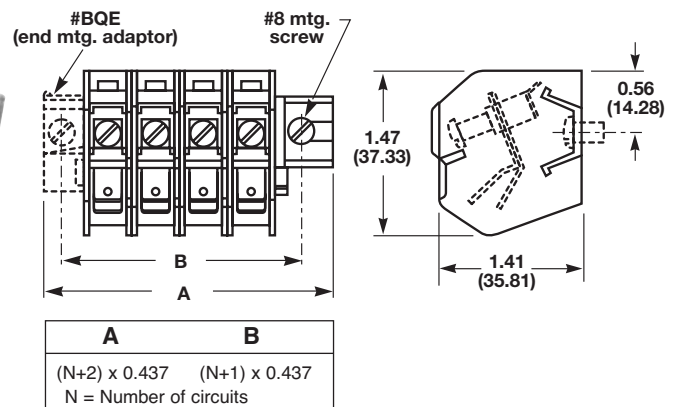
**BNQ21****SPECIFICATIONS:**

Rating: 40A, 600V
Center Spacing: 0.437" (11.10mm)
Number of Poles: 1
Circuits Per Foot: 24
Wire Range: AWG #8-22 CU
Screw Size: #8-32
Quick Connects: 0.250" x 0.031"
Mounting Options: Base Mount Stackable; End Piece (Part No. BQE) is required for mounting. Mounting screws recommended every 8 circuits.
Torque Rating: 18 lb-in
Operating Temperature: 105°C
Screw Size: #8-32
Agency Information: UL File E62622, CSA File 15364




BQE
End Mounting
Adapter Required

Dimensions - in (mm)

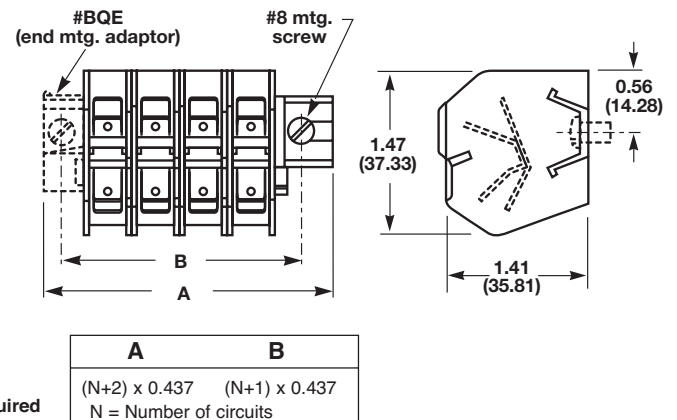
**BQQ41****SPECIFICATIONS:**

Rating: 30A, 600V
Center Spacing: 0.437" (11.10mm)
Number of Poles: 1
Circuits Per Foot: 24
Wire Range: For use with quick connect terminals only.
Quick Connects: 0.250" x 0.031"
Mounting Options: Base Mount, Stackable; End Piece (Part No. BQE) is required for mounting. Mounting screws recommended every 8 circuits.
Operating Temperature: 105°C
Agency Information: UL File E62622, CSA File 15364



BQE
End Mounting Adapter Required

Dimensions - in (mm)

Terminal Blocks:
Single & Double Row

EuroMag Series

Terminal Blocks:
Base & Rail MountPower Distribution
BlocksWire Management
ProductsEdge Connectors,
One-Sided BoardsCompliance
References