



MasterColor CDM-TC T4 Elite

MASTERColor CDM-TC Elite 35W/930 G8.5

Philips MasterColor CDM Evolution 3000K Tubular Single-EndedT4 Lamp is the next evolution of MasterColor.

Product data

General Information	
Cap-Base	G8.5 [G8.5]
Operating Position	Universal [Universal]
Life to 5% Failures (Nom)	12000 h
Life to 10% Failures (Nom)	14000 h
Life to 20% Failures (Nom)	16000 h
Life to 50% Failures (Nom)	20000 h
ANSI Code HID	C130/E

Light Technical	
Color Code	930 [CCT of 3000K]
Luminous Flux (Rated) (Min)	3600 lm
Luminous Flux (Rated) (Nom)	4000 lm
Color Designation	Warm White (WW)
Lumen Maintenance 12000 h (Nom)	78 %
Lumen Maintenance 10000 h (Nom)	80 %
Lumen Maintenance 2000 h (Nom)	93 %
Lumen Maintenance 5000 h (Nom)	88 %
Chromaticity Coordinate X (Nom)	0.435
Chromaticity Coordinate Y (Nom)	0.396
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	102 lm/W

Color Rendering Index (Min)	87
Color Rendering Index (Nom)	90

Operating and Electrical	
Power (Rated) (Nom)	39.0 W
Lamp Current Run-Up (Max)	1 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	90 V
Voltage (Min)	80 V
Voltage (Nom)	85 V

Controls and Dimming	
Dimmable	No
Run-Up Time 90% (Max)	3 min
Run-Up Time 90% (Nom)	1.5 min

MasterColor CDM-TC T4 Elite


Mechanical and Housing	
Bulb Finish	Clear (CL)
Approval and Application	
Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	4.7 mg
Energy Consumption kWh/1000 h	43 kWh
UV	
Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3
Luminaire Design Requirements	
Bulb Temperature (Max)	500 °C

Pinch Temperature (Max)	300 °C
Product Data	
Order product name	MASTERColor CDM-TC Elite 35W/930 G8.5
EAN/UPC - Product	046677409166
Order code	409169
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928189105115
Net Weight (Piece)	0.009 kg
ILCOS Code	MT/UB-35/930-H-G8.5-17/85

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Dimensional drawing




CDM-TC Elite 35W/930 G8.5

Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERColor CDM-TC Elite 35W/930 G8.5	15 mm	4.8 mm	51 mm	53 mm	52 mm	85 mm

MasterColor CDM-TC T4 Elite


Photometric data

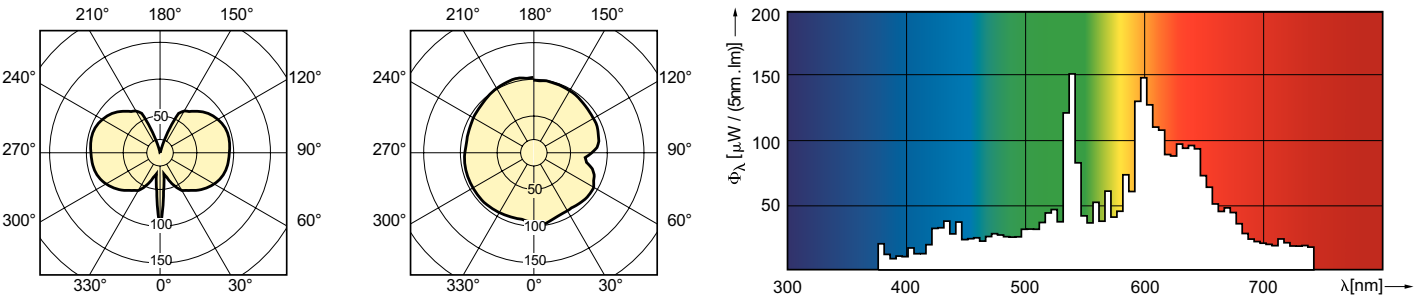

CDM-TC Elite 35W /842, /930

CDM-TC Elite 35W /930

Lifetime

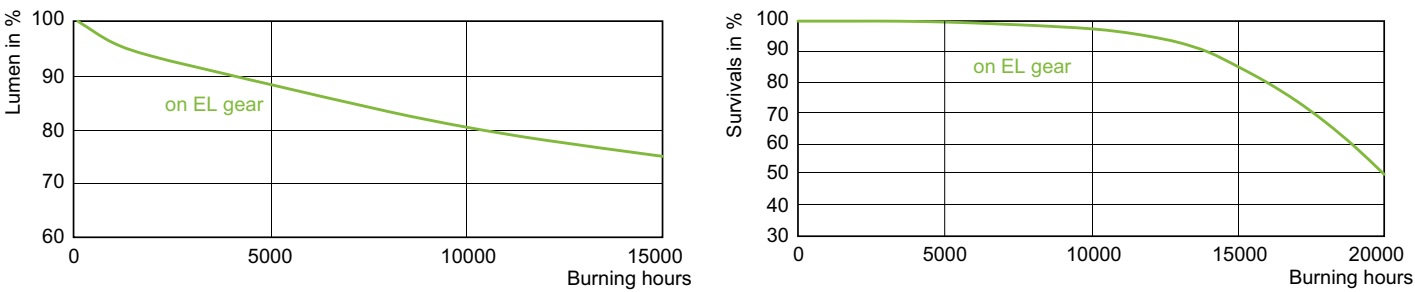

CDM-TC Elite 35W Lumen Maintenance /930

CDM-TC Elite 35W, 50W, 70W Life Expectancy /930

