



Standard

STANDARD VH1B13TPWI

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data


General Information		Input Power (Nom)	
Lamp Type	CFQ13W/GX23		24 W
Number Of Lamps	1 piece/unit	Wiring	
Lamp Footage	-	Wire Striplength	0.50/0.375 mm
Ballast Type	Magnetic Fluorescent	Lamp Connection	Series
Base Model	VH1B13TPW	Wire Length By Color	See data sheet
Suitable For Outdoor Use	Yes	Wire Gauge (Nom)	18AWG mm
Automatic Restart	Yes	Wire Type	Solid
Operating and Electrical		Remote Wiring Configuration Allowed	Yes
Input Voltage	277 V	Tandem Wiring Configuration Allowed	No
Input Frequency	60 Hz	Through Wiring Configuration Allowed	No
Total Harmonic Distortion USA	30 %	Max Ballast-Lamp Distance Remote Wiring	30'
Power (Rated) (Nom)	13 W	Max Ballast-Lamp Distance Tandem Wiring	-
Ignition Method	Preheat	Max Ballast-Lamp Distance Through Wiring	-
Crestfactor (Nom)	1.5	Mechanical and Housing	
Ignition Time (Nom)	1 s	Housing Material	Metal
Input Current (Open Circuit)	0.26	Housing	R2
Input Current (Starting)	0.3	Housing Dimensions	4.75" x 2.22" x 1.63"
Ballast Factor (Nom)	0.99	Approval and Application	
Power Factor (Nom)	0.88	EMC Immunity Standard	FCC Non-Consumer
Input Current (Nom)	0.1 A	Hum And Noise Level	A

Standard

UL Recognized	No
Product Data	
Order product name	STANDARD VH1B13TPWI
EAN/UPC - Product	781087043486
Order code	913700517819

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	913700517819
Net Weight (Piece)	0.613 kg

Dimensional drawing

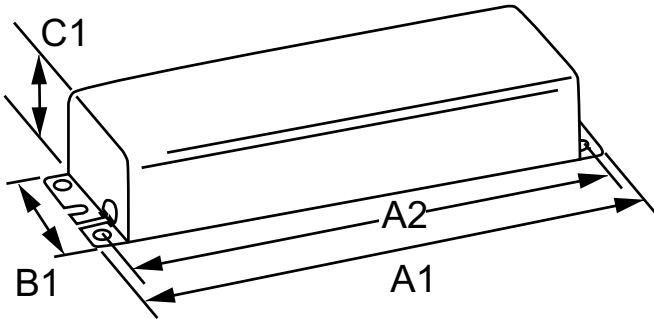

Product	A1	A2	B1	C1
STANDARD VH1B13TPWI	4.75 in	4.38 in	2.22 in	1.63 in

MAG BALLAST (1) 13W COMPACT(2-PIN) 277V

