

WITHDR. COIL FOR SIZE S10 FOR CONTACTORS
 3RT106/3RT146 AC/DC OPERATION 21-27.3V UC DRIVE:
 ELECTRONIC WITH SPS INTERFACE 24V DC

General technical data:

product brand name	SIRIUS
Product designation	Magnet coil

Control circuit:

Type of voltage of the control supply voltage	AC/DC
Control supply voltage	
<ul style="list-style-type: none"> • 1 with AC <ul style="list-style-type: none"> — at 50 Hz Rated value — at 60 Hz Rated value • 2 with AC <ul style="list-style-type: none"> — at 50 Hz Rated value — at 60 Hz Rated value 	21 V 21 V 27.3 V 27.3 V
Control supply voltage	
<ul style="list-style-type: none"> • 1 for DC Rated value • 2 for DC Rated value 	21 V 27.3 V

Certificates/ approvals:

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates	Shipping Approval
--------------------------	---------------------------------------	---------------------------	-------------------	-------------------



[Type Examination](#)



[Special Test Certificate](#)



Shipping Approval



GL



LRS



PRS



RINA

Shipping Approval	other
-------------------	-------



[Environmental Confirmations](#)

[Confirmation](#)

[other](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT19655NB31>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT19655NB31>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT19655NB31&lang=en

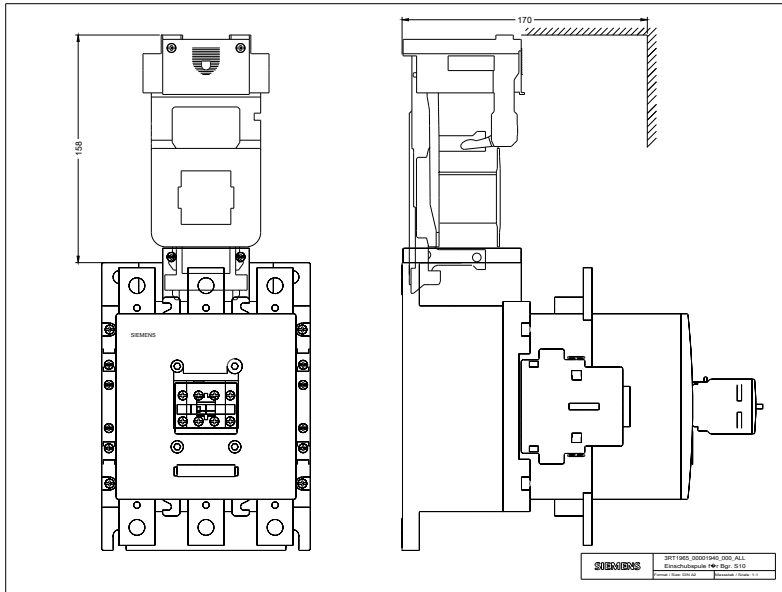

last modified:

27.04.2015