



ENCLOSURE FOR 22MM PROGRAM PLASTIC VERSION 4  
COMMAND POSITIONS GRAY TOP PART

### Enclosure:

|                                       |                                                   |
|---------------------------------------|---------------------------------------------------|
| <b>Design of the housing</b>          | Empty enclosure for command and signaling devices |
| <b>Shape of the enclosure front</b>   | rectangular                                       |
| <b>Material of the enclosure</b>      | plastic                                           |
| <b>Number of control points</b>       | 4                                                 |
| <b>Product component</b>              |                                                   |
| • protective collar                   | No                                                |
| <b>Color</b>                          |                                                   |
| • of top part of the enclosure        | grey                                              |
| <b>Delivery state</b>                 |                                                   |
| • as a kit                            | No                                                |
| • pre-wired on strip terminal         | No                                                |
| <b>Mounting type of the enclosure</b> | Vertical / horizontal                             |

### Actuator:

|                                                |     |
|------------------------------------------------|-----|
| <b>Product feature</b>                         |     |
| • lockout                                      | No  |
| <b>Product expansion optional Light source</b> | Yes |

### Front ring:

|                                     |    |
|-------------------------------------|----|
| <b>Product component front ring</b> | No |
|-------------------------------------|----|

### General technical data:

|                           |    |
|---------------------------|----|
| <b>Product function</b>   |    |
| • positive opening        | No |
| • EMERGENCY STOP function | No |
| <b>Product component</b>  |    |

|                                                                     |                   |
|---------------------------------------------------------------------|-------------------|
| • Light source                                                      | No                |
| • Stand/pedestal                                                    | No                |
| <b>Vibration resistance</b>                                         |                   |
| • acc. to IEC 60068-2-6                                             | 20 ... 200 Hz: 5g |
| <b>Protection class IP</b>                                          | IP65              |
| <b>Equipment marking</b>                                            |                   |
| • acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | S                 |
| • acc. to DIN EN 61346-2                                            | U                 |
| • acc. to DIN EN 81346-2                                            | U                 |

#### Connections/ Terminals:

|                                                   |                                                        |
|---------------------------------------------------|--------------------------------------------------------|
| <b>Type of electrical connection on enclosure</b> | Cable routing above, below / left, right, each 1 x M25 |
|---------------------------------------------------|--------------------------------------------------------|

#### Ambient conditions:

|                                                                  |                |
|------------------------------------------------------------------|----------------|
| <b>Ambient temperature</b>                                       |                |
| • during operation                                               | -25 ... +70 °C |
| • during storage                                                 | -40 ... +80 °C |
| <b>Environmental category during operation acc. to IEC 60721</b> | 3K6            |

#### Installation/ mounting/ dimensions:

|                                              |                                          |
|----------------------------------------------|------------------------------------------|
| <b>Mounting type</b>                         |                                          |
| • of contact blocks, socket, and accessories | Floor mounting / front mounting (1-pole) |
| <b>Height</b>                                | 194 mm                                   |
| <b>Width</b>                                 | 85 mm                                    |
| <b>Depth</b>                                 | 64 mm                                    |
| <b>Shape of the installation opening</b>     | round                                    |
| <b>Mounting diameter</b>                     | 22 mm                                    |

#### Accessories:

|                                                          |    |
|----------------------------------------------------------|----|
| <b>Number of labels</b>                                  | 4  |
| <b>Product component holder for 3 switching elements</b> | No |

#### Certificates/ approvals:

| General Product Approval                                                          |                                                                                   |                                                                                   | Declaration of Conformity                                                         | Test Certificates                        | Shipping Approval                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  | <a href="#">Special Test Certificate</a> |  |
| CSA                                                                               | UL                                                                                |                                                                                   | EG-Konf.                                                                          |                                          | DNV                                                                                 |

| other                        |                                             |
|------------------------------|---------------------------------------------|
| <a href="#">Confirmation</a> | <a href="#">Environmental Confirmations</a> |

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB38040AA3>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3SB38040AA3>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SB38040AA3&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB38040AA3&lang=en)

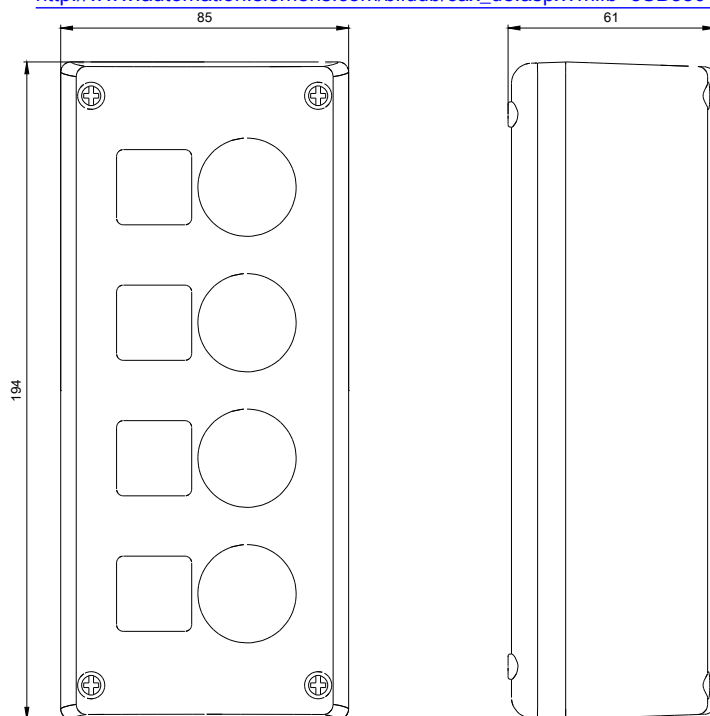

WS 1444  
WS 125: 3SB3804-0AA3\_ALL

last modified:

02.06.2015