

Meter Load Center Combination

MC2442B1400SDB, MC2442B1400SDS, MC2442B1400SD

Features

- 400A max., 320A continuous rating.
- 22,000 AIC rated.
- UL listed for use as service equipment.
- Designed to meet EUSERC requirements.
- Surface mount devices convertible to flush mounting with use of flush rail kit.
- Adjustable flush rails for 2 X 4 or 2 X 6 studs.
- Underground feed.
- Plug-in, test block bypass, and bolt-in meter socket options.
- Side-hinged, easily removable load center door.
- Uses HD type hubs.




Catalog Number	Spaces	Circuits	Socket Type	Mounting	OH/UG
MC2442B1400SDB	24	42	Bolt-on	Surface	UG
MC2442B1400SDS	24	42	Test-block	Surface	UG
MC2442B1400SD	24	42	Plug-in	Surface	UG


Data Sheet

Dimensional Drawing




MC2442B1400SDB

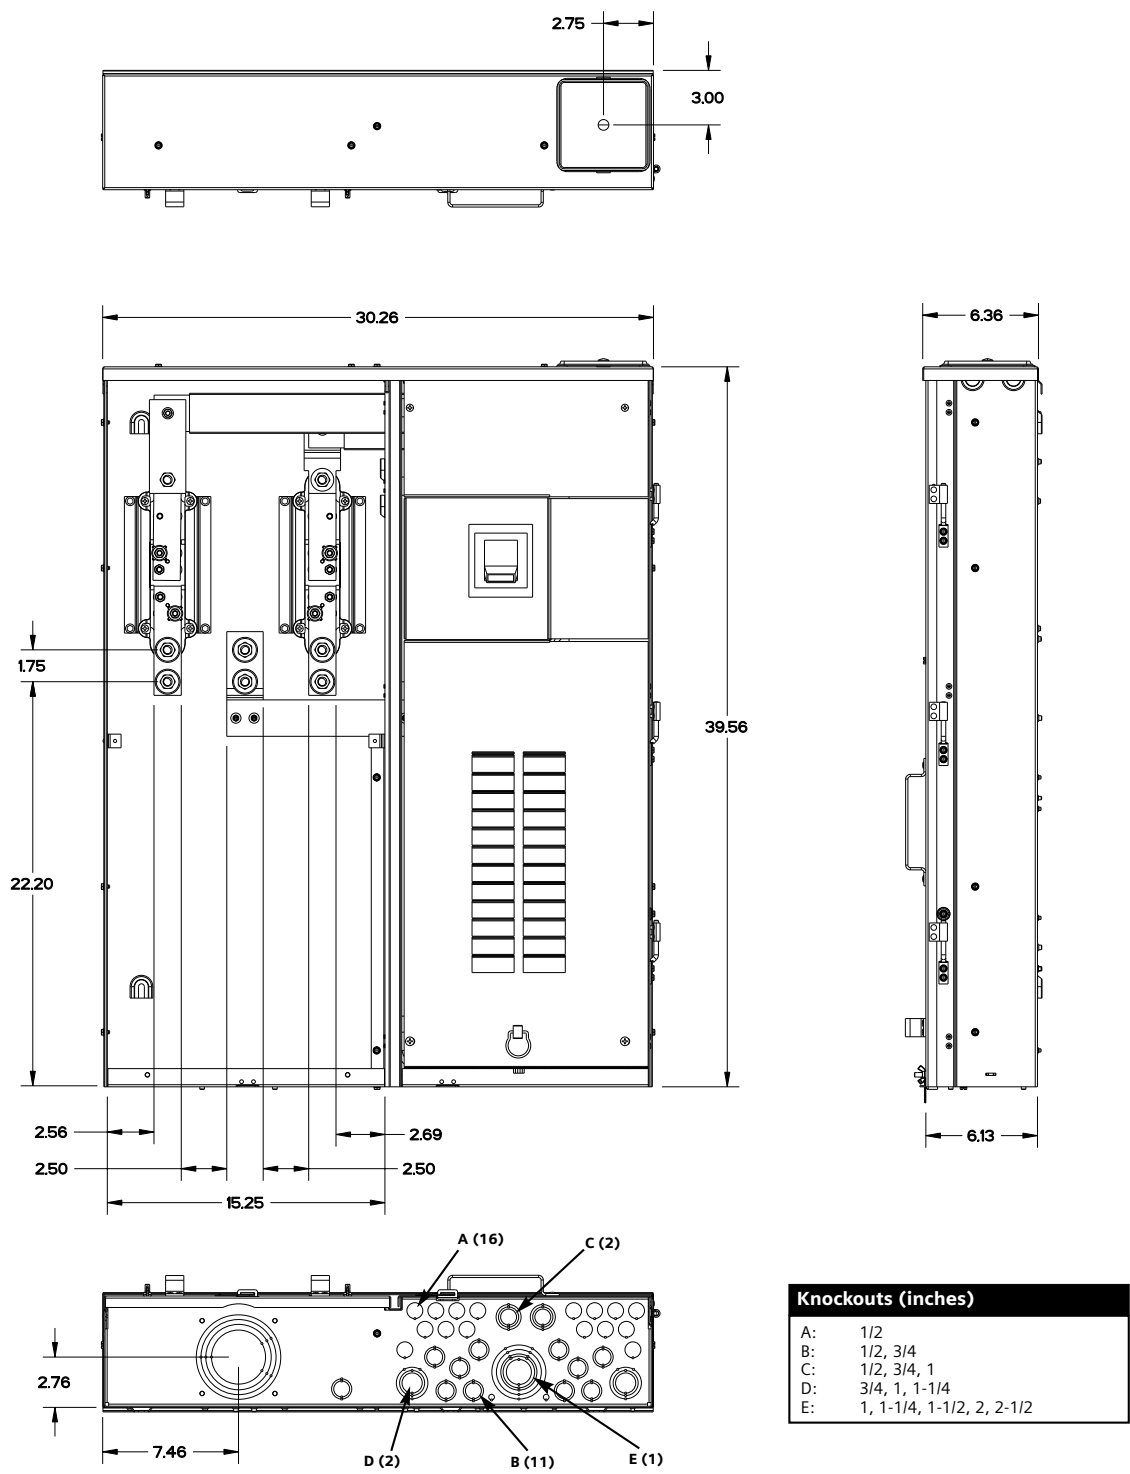

Dimensional Drawing
MC2442B1400SDS

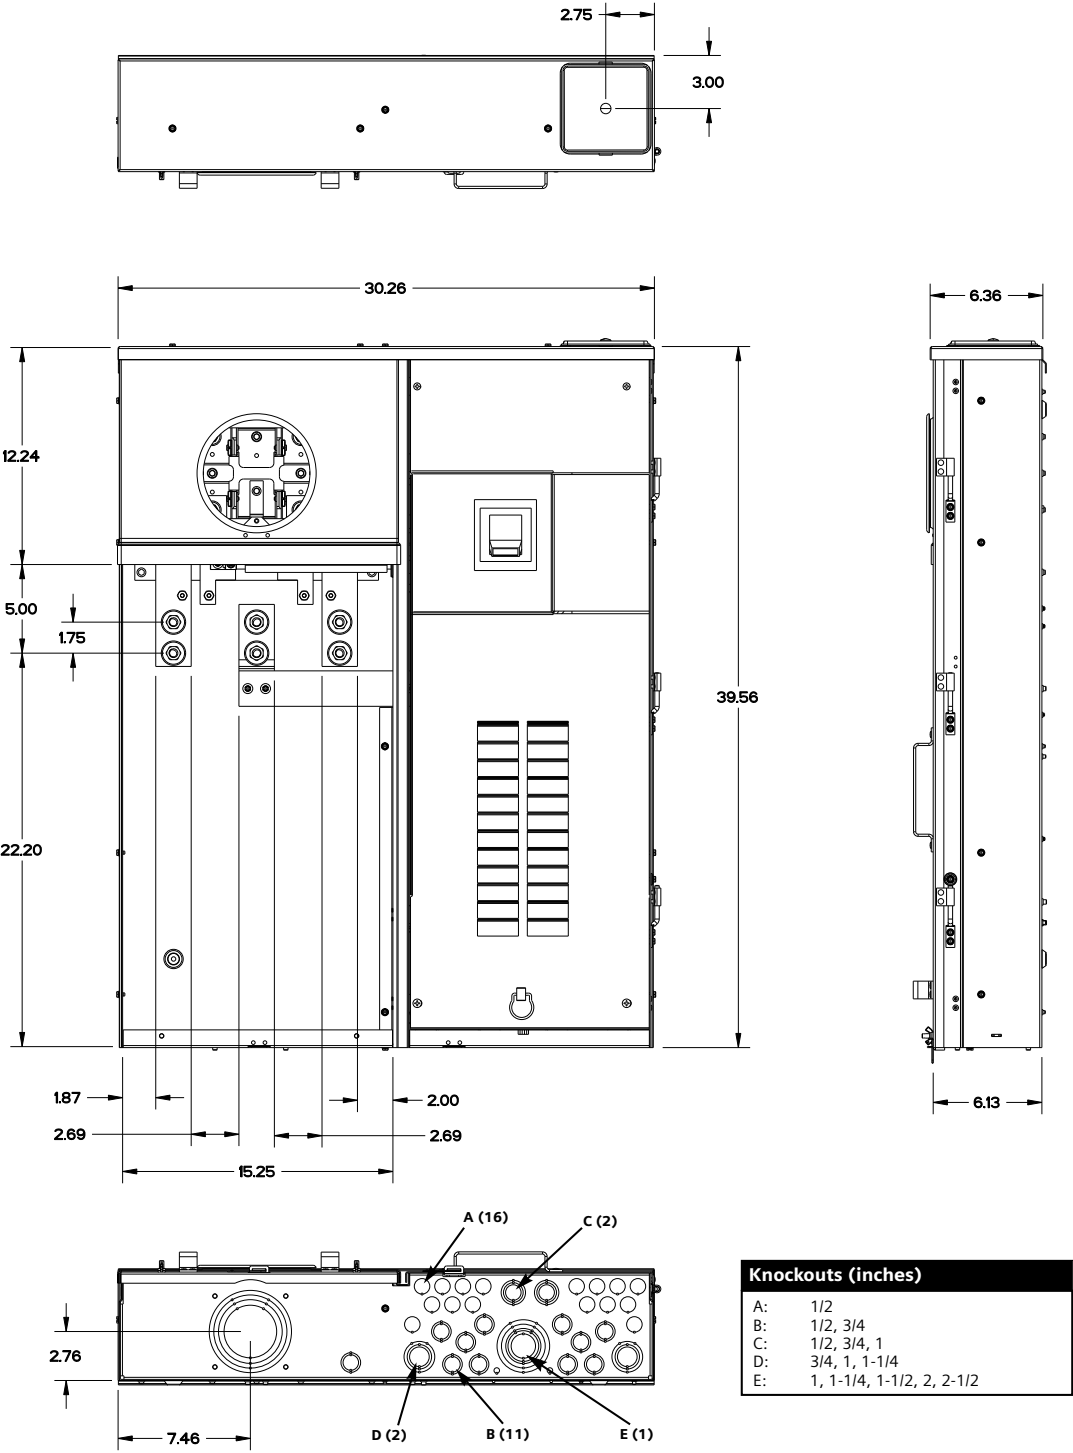

Dimensional Drawing MC2442B1400SD

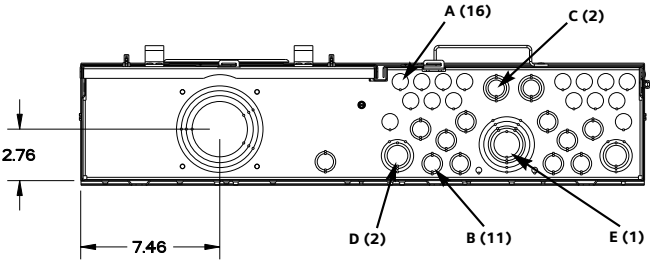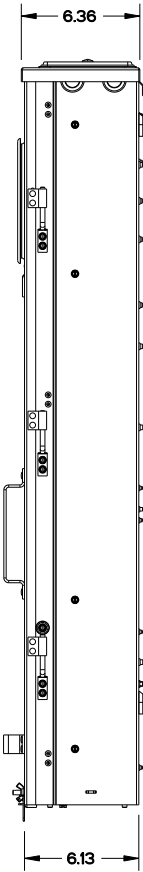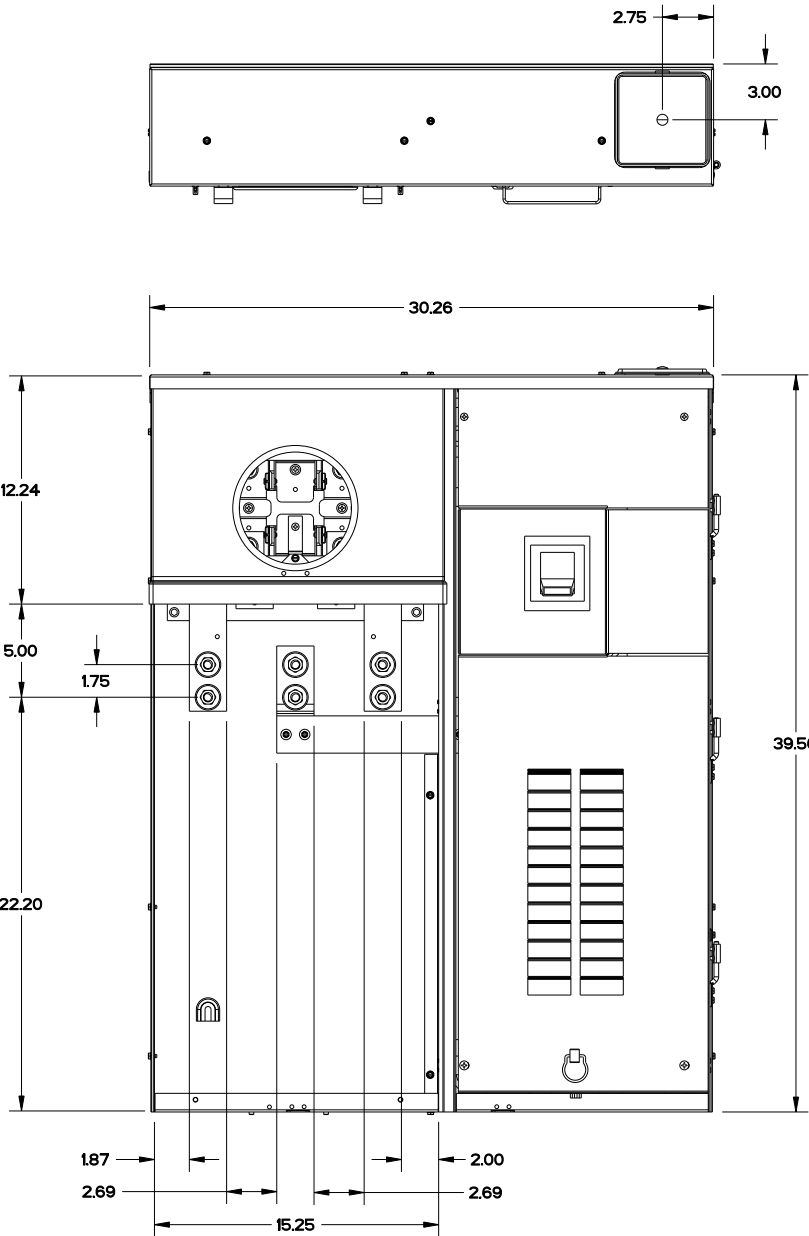

Knockouts (inches)	
A:	1/2
B:	1/2, 3/4
C:	1/2, 3/4, 1
D:	3/4, 1, 1-1/4
E:	1, 1-1/4, 1-1/2, 2, 2-1/2

Siemens Energy & Automation, Inc.
3333 Old Milton Parkway
Alpharetta, GA 30005

1-800-964-4114
info.sea@siemens.com

©2008 Siemens Energy & Automation, Inc.
All Rights Reserved. Siemens is a registered trademark of Siemens AG. Product names mentioned may be trademarks or registered trademarks of their respective companies. Specifications are subject to change without notice.

RPFL-400A1-1208 (New)

www.sea.siemens.com/residential