

ROTARY ACTUATOR HEAD, (W/O LEVER) RIGHT AND / OR LEFT SWITCHING, ADJUSTABLE FOR POSITION SWITCH 3SE51



|                                                                                                              |                                          |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------|
| <b>Product designation</b>                                                                                   | Semi-rotary actuator for position switch |
| <b>Manufacturer's article number</b>                                                                         |                                          |
| <ul style="list-style-type: none"> <li>• of the supplied actuator head for position switches</li> </ul>      | <a href="#">3SE5000-0AH00</a>            |
| <b>General technical data:</b>                                                                               |                                          |
| <b>Shock resistance</b>                                                                                      |                                          |
| <ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-27</li> </ul>                                   | 30 g / 11 ms                             |
| <b>Vibration resistance</b>                                                                                  |                                          |
| <ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-6</li> </ul>                                    | 0.35 mm/5g                               |
| <b>Equipment marking</b>                                                                                     |                                          |
| <ul style="list-style-type: none"> <li>• acc. to DIN EN 61346-2</li> <li>• acc. to DIN EN 81346-2</li> </ul> | T<br>T                                   |
| <b>Active principle</b>                                                                                      | mechanical                               |
| <b>Minimum actuating torque in activation direction</b>                                                      | 0.25 N·m                                 |
| <b>Enclosure:</b>                                                                                            |                                          |
| <b>Coating of the enclosure</b>                                                                              | Other types                              |
| <b>Communication/ Protocol:</b>                                                                              |                                          |
| <b>Design of the interface</b>                                                                               | without                                  |

#### Ambient conditions:

##### Ambient temperature

- during operation -25 ... +85 °C
- during storage -40 ... +90 °C

#### Installation/ mounting/ dimensions:

|                   |                         |
|-------------------|-------------------------|
| Mounting position | any                     |
| Mounting type     | lockable plug-in fixing |

#### Certificates/approvals

| General Product Approval                                                                 |                                                                                         | Declaration of<br>Conformity                                                      | Test<br>Certificates                                                                          | other                                                                  |                               |
|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------|-------------------------------|
| <br>CSA | <br>UL |  | <br>EG-Konf. | <a href="#">spezielle<br/>Prüfbescheinigungen</a><br><a href="#">n</a> | <a href="#">Bestätigungen</a> |

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE50000AH00>

##### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE50000AH00>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE50000AH00>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SE50000AH00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE50000AH00&lang=en)

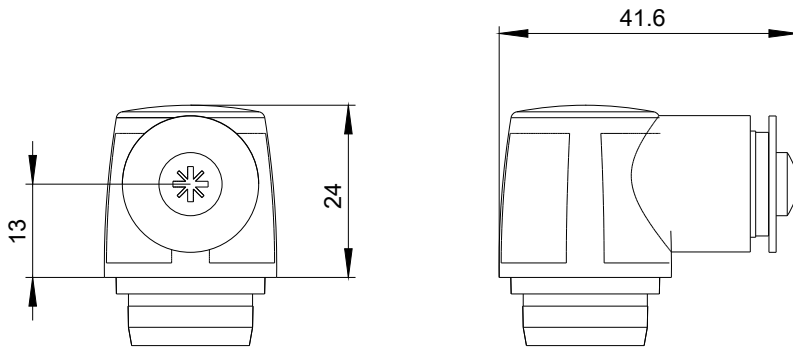

last modified:

11.03.2016