

Features and Ratings





- MODULE RATING: 2000 AMPS MAX.
- MAIN BUS RATING: 2000 AMPS
- MAIN HORIZONTAL BUS RATING:
1200 AMPS MAX. (1200 AMPS MAX. FEED PER SIDE)
- BREAKER RATING: 2000 AMPS MAX.
- 120/240 VOLTS~, 1 PHASE, 3 WIRE
- 208Y/120 VOLTS~, 1 PHASE, 3 WIRE
(FROM 3 PHASE, 4 WIRE NETWORK)
- INDOOR ENCLOSURE
- FOR UNDERGROUND SERVICE ONLY
- FEED THRU AND CROSS BUS OUTPUT


Catalog Numbers

Catalog No.	Breaker Rating (Max)	Breaker Type	Interrupting Rating(Max)
BFT12000B	2000 Amps	RXD6	65,000
BFT12000BU	2000 Amps	HRXD6	100,000


VIEW SHOWN
WITHOUT COVERS

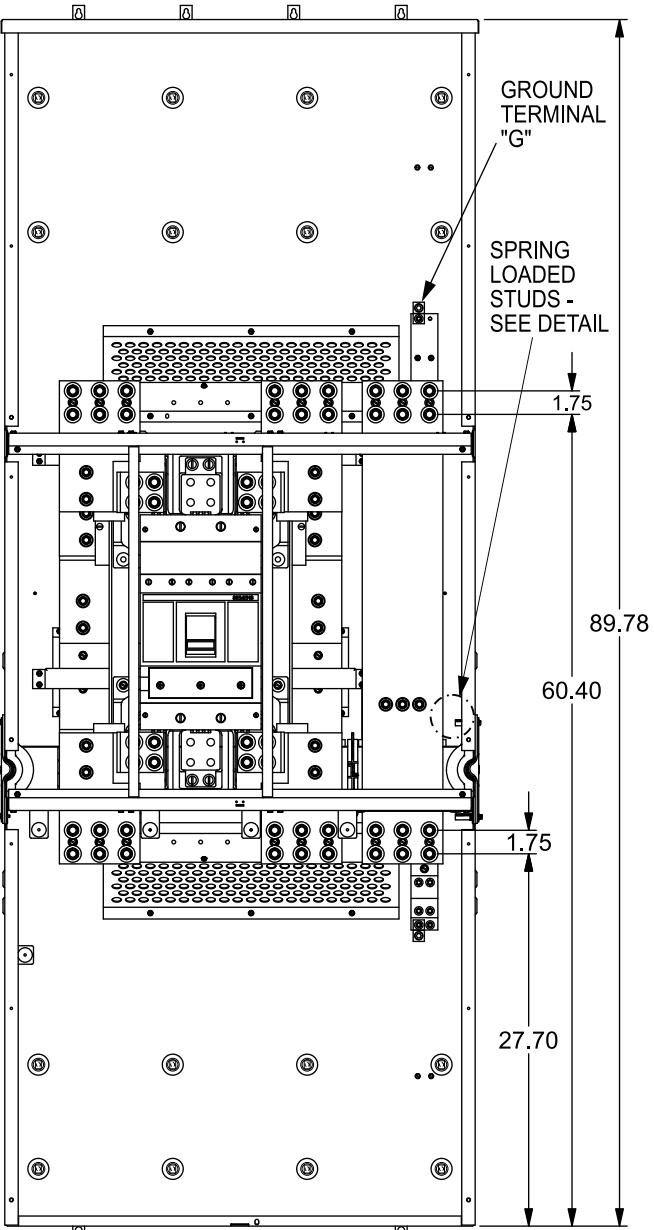

#10-32 x 7/8 SCREWS
ENCLOSURE WALL

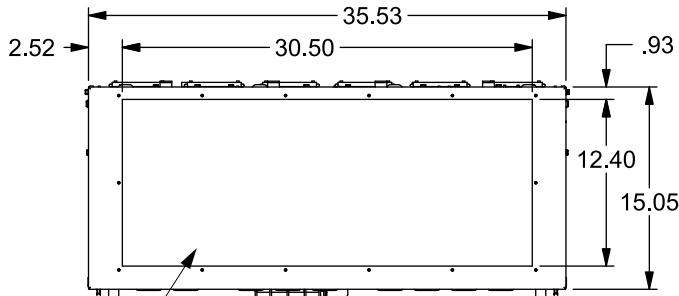

REMOVABLE
TOP ENDWALL

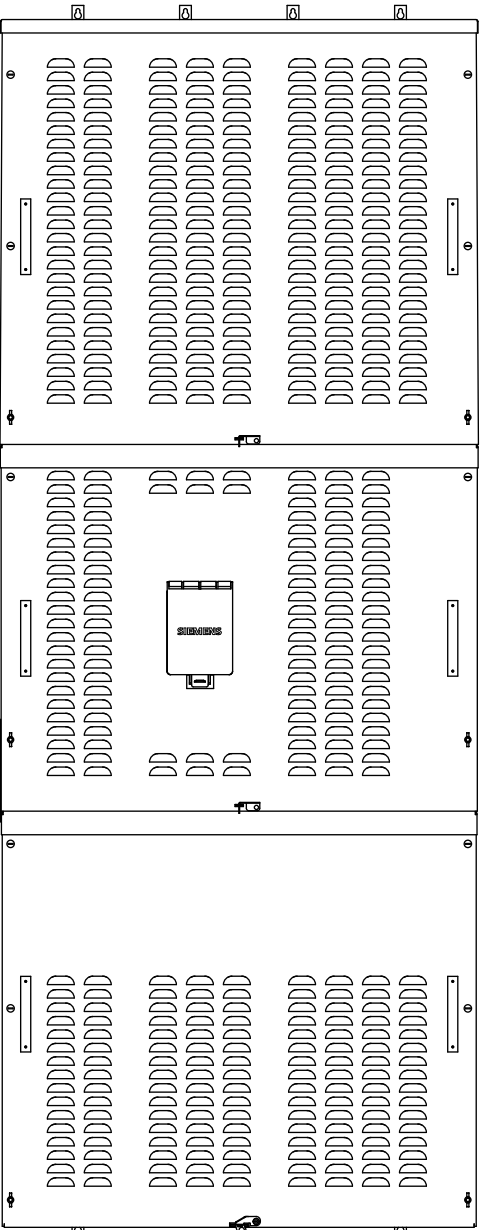

REMOVABLE
BOTTOM ENDWALL

Lug Kits and Replacement Parts

Lugs for Phase and Neutral Connections (not supplied)					
Lug No.	①	MFG	Wire Range	Type	No. Wires per phase Torque (lb.-in.)
LK16750N2		Siemens	300-750 kcmil	Mechanical	6 500
LK18500N2CD		Siemens	300-500 kcmil Copper	Mechanical	8 500
LK18750N2AD		Siemens	300-750 kcmil Aluminum	Mechanical	8 500
2ACL-750		ILSCO	750 kcmil	Compression	6 NA ②

- ① Order one mechanical lug kit for mains and neutral. Additional lug kit is required for feed-thru terminals. Contact lug manufacturer for compression lug quantities supplied for each kit.
② See lug manufacturer's instruction sheet supplied with the connector for tool, die, and number of crimps.

Additional Modules


IMPORTANT - for use with:
Module Siemens Series#
Main Breakers (W)MC, WB, WEB, WXB, BFT
Switches WMP, WMS, WS, WES, WXS
Tap/Terminal Boxes. WMTB, WTB, WET, WT_PU, WTBN, WBT
Pull Boxes WMMB
Meter Module (W)MM, WxMM, (W)MT, (W)ML, (W)MK, (W)MLZ(F)
Meter Combinations WC, WCL, WCT
Extension Box WMEX, WSP, WSPD
Bussed Elbow BE, WELB

Accessories

ECMMGBE - Ground Bus Extension
Ground Terminal G (Accessory Cat.# ECMLK3225):
Wire size #4-300 kcmil. Torque terminal to 250 lb.-in.

Connect Modules Using:	Catalog Number / Torque
QuickConnect	QC1, Torque 400-440 lb-in (35-36 ft.-lb.)

Equip Ground Acc'y	Cat. No. ECLX072M
Small Terminals	Large Terminals
Wire Range / Torque	Wire Range / Torque
10-14 AWG 20 lb-in	10-14 AWG 35 lb-in
8 AWG 25 lb-in	8 AWG 40 lb-in
6 AWG 35 lb-in	1/0-6 AWG . 45 lb-in

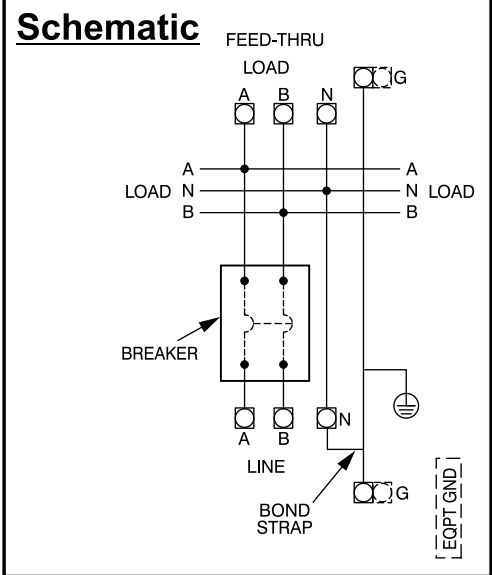

Catalog No.
BFT12000BU Shown