

Pro

ProGuard **Exacta/al**



FEATURES

- Available in 150w incandescent or 18w, 26w and 32w compact fluorescent.
- High temperature silicone gasket provides a watertight seal.
- Watertight mounting in any direction.
- Optional cast aluminum, polymeric or stainless steel guards.
- A wide variety of globe materials and colors.

APPLICATIONS

- Ceiling, pendant and wall mount types
- Watertight requirements
- Dusttight requirements
- Freezer and refrigeration
- Pharmaceutical & additives formulation & processing
- Waste water treatment plants

APPROVALS

- Enclosed & Gasketed
- Type 4
- Conforms to IP66

STANDARDS

- UL 1598 - Luminaires
- CSA - C22.2 250 04
- CSA - C22.2 141

TECHNICAL SPECIFICATIONS

HOUSING

Cast copper free aluminum with an electrostatically applied polyester powder coat finish.

GUARD

Optional, cast aluminum, nylon 6/6 or stainless steel guard.

HARDWARE

Stainless steel.

ENTRIES

½" or ¾" NPT.

GASKETS

One piece silicone.

MOUNTING

Ceiling, pendant or wall.

LAMP HOLDER

Incandescent, medium base porcelain. Compact fluorescent, polycarbonate.

GLOBE

Glass, tempered glass or polycarbonate.

LAMP TYPE

A-21 150w incandescent or 4 Pin compact fluorescent. Lamps not provided unless option "L" is selected.

VOLTAGE

Incandescent rated to 240.

Fluorescent rated to 120v 50/60Hz, optional 277v 50/60Hz.

Lamp Type	Lamp Wattage	Globe	Supply Wire
Incandescent	150	Glass	90°C
Incandescent	100	Glass	90°C
Incandescent	100	Polycarbonate	90°C
Compact fluorescent	32 Max	All	90°C

ORDERING REFERENCES

1. Series
ACEV

2. Lamp Type
151 - 150 watt max incandescent
18F - 18 watt compact fluorescent
26F - 26 watt compact fluorescent
32F - 32 watt compact fluorescent

3. Voltage / Frequency
1 - 120v 50/60 Hz
2 - 240v 50/60 Hz (Incandescent only)
3 - 277v 50/60 Hz (Compact fluorescent only)

4. Globe Type
GC* - Glass, clear
PC* - Polycarbonate, clear
PP - Polycarbonate, prismatic
TG - Tempered Glass, clear

5. Guard
G - Guard, cast (Glass globes only)
GP - Guard, polymeric (Glass globes only)
GW - Guard, stainless steel wire

*For colored globes replace "C" with first letter of color required. (ie.: "GR" for red glass globe.) Colors available: Amber, Blue, Green, Red and White.

Globe use - mounting warning:
Glass globes 150 watt max, any mounting position. Polycarbonate globe 100 watt max, base up only. Polycarbonate globe 60 watt max, any mounting position.

6. Mounting Options
C1 - Ceiling Mount, feed through ½" NPT
C2 - Ceiling Mount, feed through ¾" NPT
P1 - Pendant Mount, ½" NPT
P2 - Pendant Mount, ¾" NPT
W1 - Wall Mount & Outlet Box, ½" NPT
W2 - Wall Mount & Outlet Box, ¾" NPT
WB - Wall Mount without Outlet Box

7. Special Options
L* - Lamp

*Lamp not included unless option "L" is specified.

Notes
1. Consult factory for options not listed.

COMMONLY ORDERED LUMINAIRES


Part No.	Mounting	Lamp Type	Lamp Wattage	Weight		Shipping Volume
				Lbs	Kg	
ACE V151 1GC G P1	PENDANT	Incandescent	150	3.7	1.65	0.5 ft ³
ACE V18F 1GC G P1	PENDANT	Compact Fluorescent	18	5.1	2.30	0.8 ft ³
ACE V26F 1GC G P1	PENDANT	Compact Fluorescent	26	5.1	2.30	0.8 ft ³
ACE V32F 1GC G P1	PENDANT	Compact Fluorescent	32	5.1	2.30	0.8 ft ³
ACE V151 1GC G C1	CEILING	Incandescent	150	4.1	1.85	0.5 ft ³
ACE V18F 1GC G C1	CEILING	Compact Fluorescent	18	5.5	2.50	0.8 ft ³
ACE V26F 1GC G C1	CEILING	Compact Fluorescent	26	5.5	2.50	0.8 ft ³
ACE V32F 1GC G C1	CEILING	Compact Fluorescent	32	5.5	2.50	0.8 ft ³
ACE V151 1GC G W1	WALL	Incandescent	150	5.4	2.45	0.5 ft ³
ACE V18F 1GC G W1	WALL	Compact Fluorescent	18	6.8	3.10	0.8 ft ³
ACE V26F 1GC G W1	WALL	Compact Fluorescent	26	6.8	3.10	0.8 ft ³
ACE V32F 1GC G W1	WALL	Compact Fluorescent	32	6.8	3.10	0.8 ft ³

ProGuard **Exacta/al**

SPARE PARTS

Part No.	Description		
FX5206	BALLAST, 120v, 18w CF	INX2007RED	GLASS GLOBE, Red
FX5206	BALLAST, 120v, 26w CF	INX2007GRN	GLASS GLOBE, Green
FX5206	BALLAST, 120v, 32w CF	INX2007BLU	GLASS GLOBE, Blue
FX3552	LAMP, 18w CF	INX2007YEL	GLASS GLOBE, Amber
FX3553	LAMP, 26w CF	INX2007HR	GLASS GLOBE, Clear Tempered
FX3554	LAMP, 32w CF	P100C	GLOBES, Clear Polycarbonate
INX3558	LAMP, 150w Incandescent	INXGC150	CAST GUARD
FX4030	LAMP HOLDER, 18w CF	INXGW150	STAINLESS STEEL GUARD
FX4034	LAMP HOLDER, 26w CF	INXGP150	POLYMERIC GUARD
FX4034	LAMP HOLDER, 32w CF	GKT101-0002	JUNCTION BOX GASKET
INX755-0930	LAMP HOLDER, Incandescent		
INX2007CLR	GLASS GLOBE, Clear		

DIMENSIONS

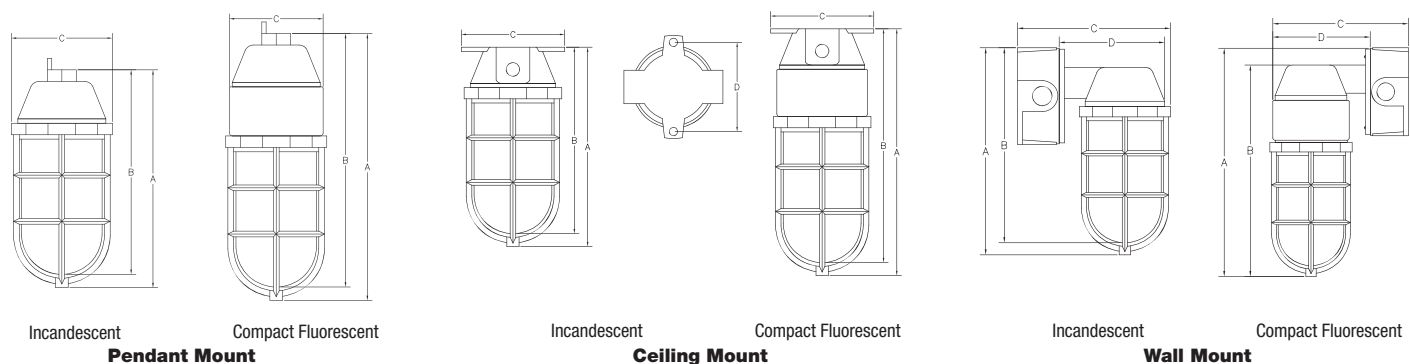

Mount	Pendant Mount		Ceiling Mount		Wall Mount	
Type	Incandescent	Compact Fluorescent	Incandescent	Compact Fluorescent	Incandescent	Compact Fluorescent
A	9.75 (24.8)	12.13 (30.8)	9.25 (23.5)	11.13 (28.3)	10.13 (25.7)	12.5 (31.8)
B	9.25 (23.5)	11.63 (29.5)	8.75 (22.2)	10.63 (27.0)	9.63 (24.5)	12.0 (30.5)
C	4.34 (11)	4.34 (11)	4.63 (11.7)	4.63 (11.7)	7.25 (18.4)	7.25 (18.4)
D	--	--	4.00 (10.2)	4.00 (10.2)	5.13 (13)	5.13 (13)

Dimensions are in inches (cm).

NOTES