



C-Clamp for Strut and Rod – 200RS375



- Dual purpose beam clamp for rod and strut
- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI®/MSS-SP-58 (Type 23)

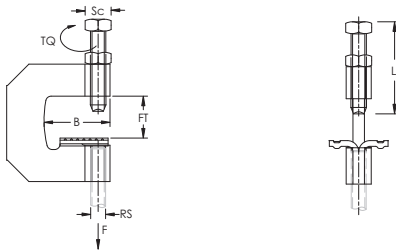

Part Number	200RS375
Material	Steel
Finish	Pregalvanized
Rod Size (RS)	3/8"
Flange Thickness (FT)	5/8" Max
B	1 1/2"
Screw Diameter (Sc)	3/8"
Screw Length (L)	3"
Pipe Size	3 1/2" Max
Torque (TQ)	5 ft lb
Static Load (F)	250 lb
Certifications	cULus
Standard Packaging Quantity	10 pc
UPC	78285634245

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

Load rating is per fastener with a 3X safety factor. Actual installation must be evaluated to determine load on the individual fastener.

Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the I-beam and then an additional 1/4 to 1/2 turn added.

ANSI is a registered trademark of American National Standards Institute. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2017 Pentair. All rights reserved.

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

