



Catalog Number: M404-UG-LC-BS
Item Description: 400A 4T RT UG 400AMNCB
UPC Code: 784572255944

Brand Name: Milbank

Type: Ring Type Meter Socket

Application: Meter Socket With Main And Load Center

Standard: UL Listed

Voltage Rating: Up to 240 Volts Alternating Current

Amperage Rating: 320 Continuous Ampere

Phase: 1 Phase

Frequency Rating: 60 Hertz

Number Of Cutouts: 1

Cutout Size: 400 Ampere Main Breaker

Cable Entry: Underground

Terminal: Single Mechanical Line Side and Single Mechanical Load Side




Mounting: Surface Mount

Enclosure: Type 3R, G90 Galvanized Steel with Powder Coat Finish



Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	4	TRANS. MNTG.EMBOSS
B	12	½ SOLID K.O.
C	4	½, ¾ CONC. K.O.
D	2	½, ¾, 1, 1¼ CONC. K.O.
E	2	¾, 1 CONC. K.O.
F	3	¾, 1, 1¼, 1½ CONC. K.O.
G	4	1, 1¼, 1½, 2 CONC. K.O.
H	1	3, 3½, 4 CONC. K.O.

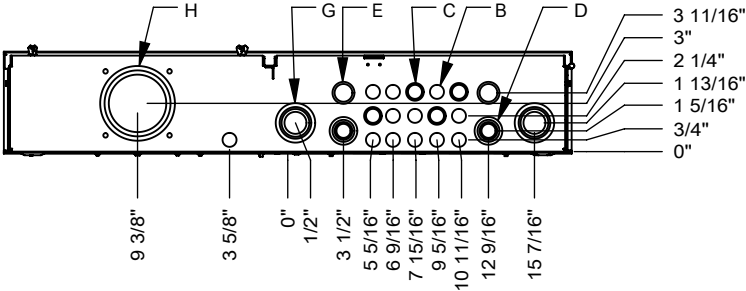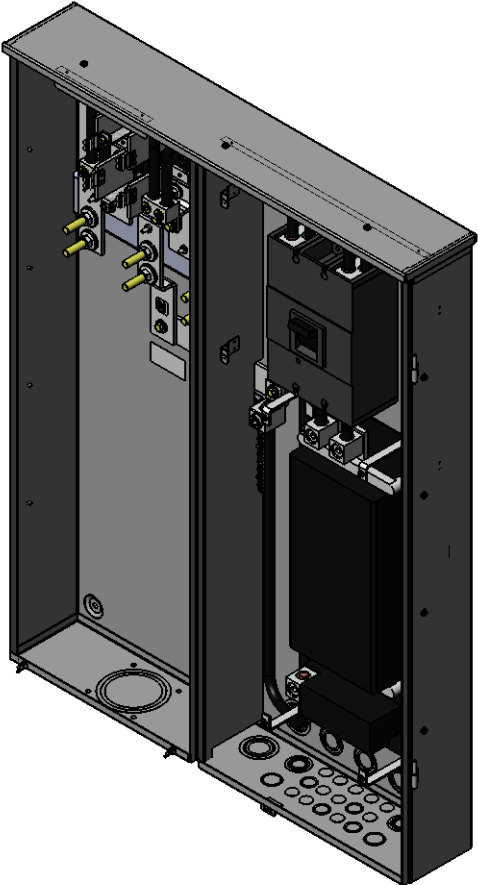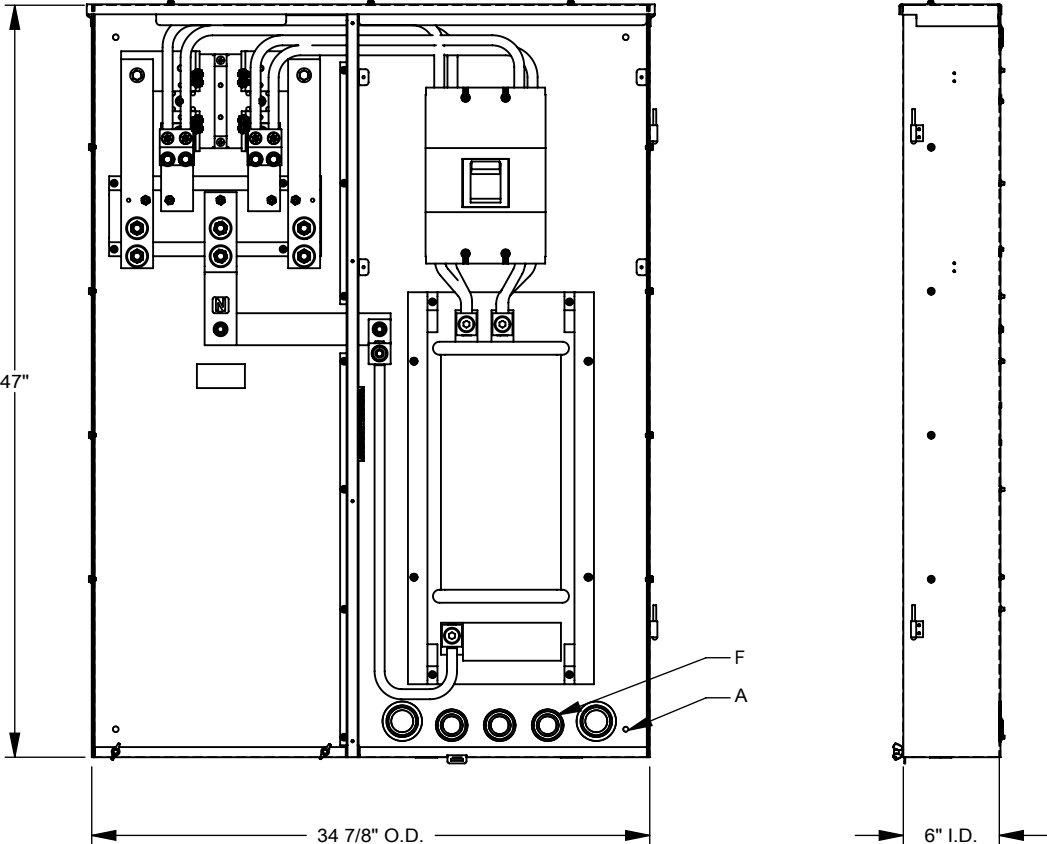

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.
Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.