| | |
|---|---|
| Catalog Number: | U5852-RL-150 |
| Item Description: | 200A 4T RT MTR MAIN OH |
| UPC Code: | 784572529342 |






| | |
|---|---|
| Brand Name: | Milbank |
| Type: | Ring Type Meter Socket |
| Application: | Meter Socket With Main |
| Standard: | UL Listed |
| Voltage Rating: | Up to 240 Volts Alternating Current |
| Amperage Rating: | 200 Continuous Ampere |
| Phase: | 1 Phase |
| Frequency Rating: | 60 Hertz |
| Number Of Cutouts: | 1 |
| Cutout Size: | 150 Ampere Main Breaker |
| Cable Entry: | Overhead |
| Terminal: | Lay in Line Side and Single Mechanical Load Side |
| Mounting: | Surface Mount |
| Enclosure: | Type 3R, G90 Galvanized Steel with Powder Coat Finish |


| | |
|---|---|
| Additional Specifications: | Number of Jaws:4 Terminal |
| | Hub Opening and Closing Plates:Small Hub Opening |
| | Hub Opening and Closing Plates:Small Hub Opening |
| | Hub Opening and Closing Plates:Small Hub Opening |
| | Hub Opening and Closing Plates:Small Hub Opening |
| | Hub Opening and Closing Plates:Small Hub Opening |


*Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.*

| FEATURE TABLE | | |
|---|---|---|
| ITEM | QTY | DESCRIPTION |
| A | 6 | U/L MNTG.EMBOSS |
| B | 1 | ¼ SOLID K.O. |
| C | 1 | ¼, ½ CONC. K.O. |
| D | 4 | 1, 1¼, 1½, 2, 2½ CONC. K.O. |

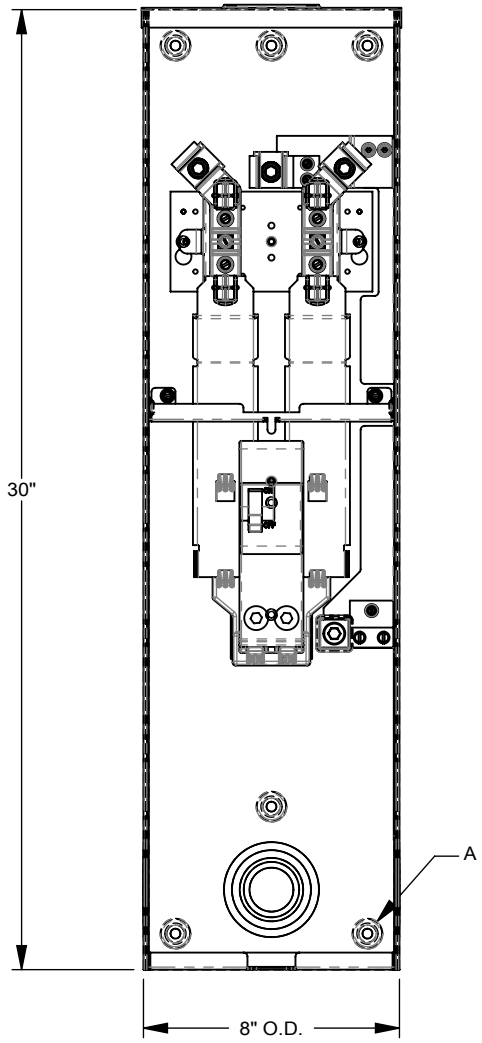

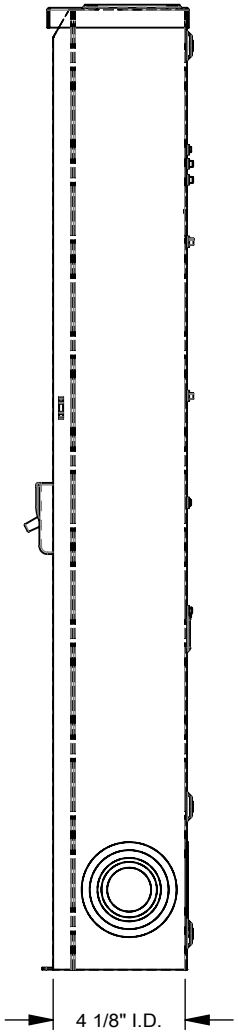

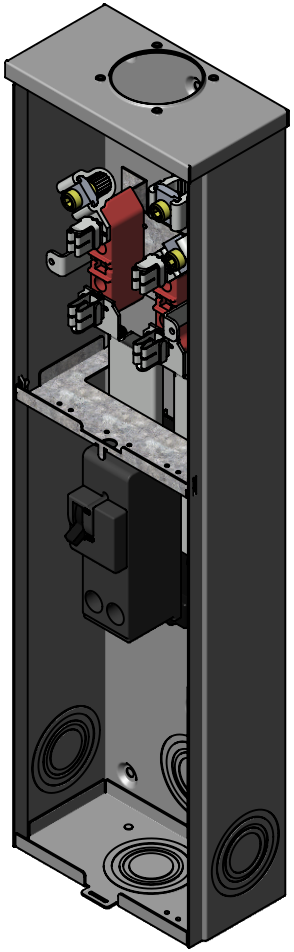
MILBANK
ENERGY AT WORK

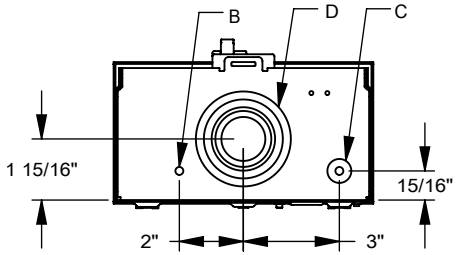Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.