


Wiring Devices | Plugs & Connectors

Standard Grade
Thermoplastic
Plugs & Connectors2-Pole, 2-Wire Non-Grounding
15A, 125V/AC

FEATURES

- Tough thermoplastic construction.
- Plug blades firmly embedded in body.



1912




3123

Thermoplastic Plugs & Connectors

15A 125V/AC

Description	Cord Diameter	Color or Color Suffix	Plug	Catalog No.	Connector
NEMA 1-15, Flat Handle Body	0.31" (7.9mm)	B, W	□ 1912	•	—
NEMA 1-15, Round Body	0.41" (10.4mm)	BK	□ 3123	•	—
NEMA 1-15, Cylindrical Body	0.25-0.67" (6.4-17.0mm)	Orange	—	□ 6882	•

UL SP NOM 426 Listed to UL498, file no. E15012; CSA certified to C22.2, no. 42; NOM certified except 6882

Standard Grade
Thermoplastic
Plugs & Connectors2-Pole, 3-Wire Grounding
15A, 125V/AC

FEATURES

- Tough thermoplastic construction.
- Plug blades firmly embedded in body.



6867



6887

Thermoplastic Plugs & Connectors

15A 125V/AC

Description	Cord Diameter	Color	Plug	Catalog No.	Connector
NEMA 5-15, Cylindrical Body	0.67" (17.0mm)	Orange	□ 6867	•	□ 6887

UL SP NOM 426 Listed to UL498, file no. E15012; CSA certified to C22.2, no. 42; NOM certified


Color Ordering Information: For ordering devices, include Cat. No. followed by the color code if applicable: B (Brown), BK (Black), W (White)

Dimensional Information: B-63

Specification Information: Please visit www.cooperwiringdevices.com


NAFTA Compliant: See page F-21

Standard Rubber Plugs & Connectors

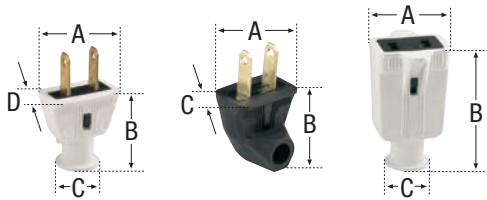


Family	A	B	C	D	Cord Dia.
Plug	1.17" (29.7mm)	1.25" (31.8mm)	0.71" (18.0mm)	0.73" (18.5mm)	0.33" (8.4mm)
Angled Plug	1.17" (29.7mm)	1.15" (29.2mm)	0.73" (18.5mm)	—	0.33" (8.4mm)
Connector	1.18" (30.0mm)	2.00" (50.8mm)	0.71" (18.0mm)	—	0.33" (8.4mm)

Spring Action Plugs & Connectors




Family	A	B	C	D	E	Cord Dia.
2P, 2W Plug	1.16" (29.5mm)	1.37" (34.8mm)	0.75" (19.1mm)	0.62" (15.7mm)	0.75" (19.1mm)	0.33" (8.4mm)
2P, 2W Connector	1.17" (29.7mm)	1.78" (45.2mm)	0.75" (19.1mm)	0.62" (15.7mm)	0.75" (19.1mm)	0.33" (8.4mm)
2P, 3W Plug	1.08" (27.4mm)	1.56" (39.6mm)	0.70" (17.8mm)	0.70" (17.8mm)	1.22" (31.0mm)	0.32" (8.1mm)
2P, 3W Connector	1.08" (27.4mm)	2.25" (57.2mm)	0.70" (17.8mm)	0.70" (17.8mm)	1.22" (31.0mm)	0.32" (8.1mm)

Standard Thermoplastic Plugs & Connectors

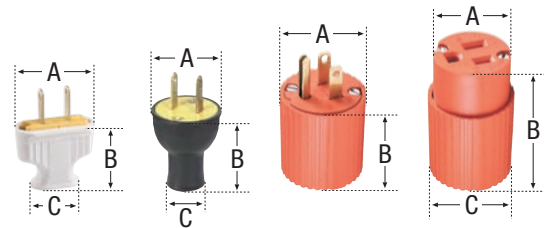


Family	A	B	C	Cord Dia.
Flat Plugs	1.48" (37.6mm)	1.19" (30.2mm)	0.92" (23.4mm)	0.31" (7.9mm)
Round Plugs	1.28" (32.5mm)	1.50" (38.1mm)	0.75" (19.1mm)	0.41" (10.3mm)
Cylindrical Plugs	1.54" (39.1mm)	1.72" (43.7mm)	—	0.67" (17.0mm)
Cylindrical Connectors	1.37" (34.8mm)	2.60" (66.0mm)	1.54" (39.1mm)	0.67" (17.0mm)

Academy™ Series Plugs



Family	A	B	C	D	E	Cord Dia.
Easy Install Plug	1.16" (29.5mm)	1.37" (34.8mm)	0.75" (19.1mm)	0.62" (15.7mm)	0.75" (19.1mm)	0.33" (8.4mm)
Super Plug™	1.17" (29.7mm)	1.78" (45.2mm)	0.75" (19.1mm)	0.62" (15.7mm)	0.75" (19.1mm)	0.33" (8.4mm)

Ceiling Lampholders

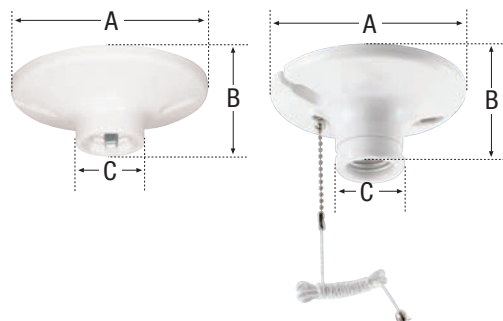

Family	A	B	C
Porcelain One Piece	4.50" (114.3mm)	1.50" (38.1mm)	1.70" (43.2mm)
Porcelain Two Piece	4.50" (114.3mm)	2.14" (54.4mm)	1.63" (41.4mm)
Plastic One Piece	4.56" (115.8mm)	1.52" (38.6mm)	1.59" (40.4mm)
Plastic Two Piece	4.63" (117.6mm)	2.16" (54.9mm)	1.63" (41.4mm)