


Bus Drop Cable Supports and Clamps





Applications

- “Bus-Drop” cable clamps designed for exposed branch feeder installations.
- Supports cable in flexible connecting circuits used to feed equipment. Cable is run in fixed overhead bused structures to a point directly above equipment then dropped with a 90° bend. At the point of drop, the cable clamp is installed to support the cable.
- Mooring cable clamps are used to attach a guy wire to the cable where it leaves bus structure, thus preventing wire terminal strain and possible conductor breakage.

Features

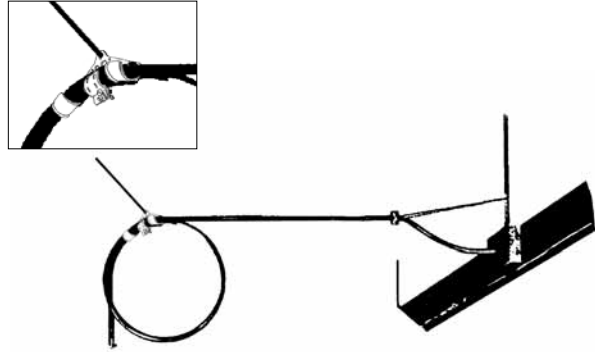- Clamps provide maximum versatility of installation where equipment is likely to be moved from one location to another. Installation is fast and modification is simple.
- One clamp covers entire range of cable sizes and can be used for one 90° bend.
- Two clamps, back to back, allow for an additional loop providing extra cable footage when a machine is likely to be moved.



	Catalog Number	Cable Range (Inches/Millimeters)	Wt. Lbs./Kgs. Per 100
“Bus-Drop” Cable Clamps and Strap			
	BD-1	0.40 - 1.19/ 10.2 - 30.2	59.00/26.76
	BD-1D	0.40 - 1.19/ 10.2 - 30.2	118.00/53.52
	BD-1A	0.40 - 1.19/ 10.2 - 30.2	52.00/23.59
	BD-1B	0.40 - 1.19/ 10.2 - 30.2	9.00/4.08
“Bus-Drop” Mooring Cable Clamps			
	BDM-1	0.40 - 0.88/ 10.2 - 22.4	17.00/7.71
	BDM-2	0.88 - 1.19/ 22.4 - 30.2	34.00/15.42