

Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

Applications

- Local control stations and motor control stations for use in hazardous areas covering the broadest possible range of applications.
- Control of equipment at:
 - Power plants
 - Chemical and petrochemical plants
 - Petroleum refineries
 - Reverse osmosis plants
 - Pulp and paper processing plants
 - Various industrial applications
- Push buttons and selector switches are used in conjunction with contactors or magnetic starters for remote control of motors in hazardous locations. They provide circuit control and/or selection.
- Pilot lights provide visual assurance that an electrical function is being performed at a remote or hazardous location.
- For use in washdown areas.

Features

- Employs Ex de method of protection which eliminates the need for external seals.
- Operators include push buttons, illuminated push buttons, selector switches, control and load break switches and LED pilot lights.
- Pilot light employs high intensity single LED with lifetime of 100,000 hours that can be used at:
 - 12 Vac to 254 Vac 50/60 Hz
 - 12 Vdc to 60 Vdc
- Up to 3 contact blocks per actuator can be used.
- Contact block technical data:
 - IEC rated operating voltage (Ue): 500 Vac – 110 Vdc
 - IEC switching capacity:
 - AC12: 16 Amp/400 Vac
 - AC14: 10 Amp/400 Vac
 - AC15: 6 Amp/500 Vac
 - DC13: 2 Amp/24 Vdc and 1 Amp/110 Vdc
 - NEMA switching capacity: A600: 10 Amp/600 Vac
- Selector switch technical data:
 - IEC rated operating voltage: 690 Vac
 - IEC rated operating current: maximum 16 Amp
 - IEC switching capacity:
 - AC1: 16 Amp/690 Vac
 - AC15: 16 Amp/415 Vac
 - AC3: 8 Amp/500 Vac
 - AC3: 4 Amp/690 Vac
 - AC3: 16 Amp/690 Vac
 - DC1: 10 Amp/24 Vdc
 - DC1: 6 Amp/60 Vdc
 - DC1: 6 Amp/110 Vdc (2 contacts wired in series)
 - DC1: 6 Amp/220 Vdc (3 contacts in series)
 - NEMA switching capacity: A600: 10 Amp/600 Vac
- Enclosures are rated for IP66 with firmly secured gasket.
- Operators and contact blocks are spaced for easy wiring.
- Wide selection of termination methods available.
- Choice of DIN rail mounted high performance contact block suitable for low intensity (less than 5 mA).
- TS35 rail mounted components are held securely in place during operation and easily removed for service.



U83W2 PRA5A9

- Brass Inserts are provided for TS35 DIN rails or mounting plates to be installed inside the enclosure.
- Captive, corrosion resistant stainless steel cover screws.

Standard Materials

- Body and cover: aluminum with gray epoxy powder coating
- Cover screws: 304 stainless steel

Accessories

- Key for changing actuator blocks.
- Guard for mushroom head actuator.
- Padlockable guard.
- M5 and M6 earth stud.
- Combination drain and breather available in brass, polyamide and stainless steel.

Options

- Nameplates: Stainless Steel or Lamacoid with different color combinations.
- Padlocking facility at left, center, right or any position on selector switches.
- Padlocking facility for momentary and maintained push buttons.
- Special contact arrangements available, see *Unicode™ 2 Series Customized Control Stations*.

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

**Appleton**

Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
⊕ II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

ATEX/IECEX Certification and Compliances

- Fiberglass Reinforced Polyester (FRP)
 - Certification Type CSPe
 - Gas: Zone 1 and 2
 - Conforming to ATEX 94/9/CE: ⊕ II 2 G
- Certification Type PCe
 - Gas: Zone 1 and 2
 - Conforming to ATEX 94/9/CE: ⊕ II 2 G
 - Type of Protection: Ex de IIC/Ex demb IIC
 - Temperature Class: T6
 - Dust: Zone 21 and 22
 - Conforming to ATEX 94/9/CE: ⊕ II 2 D
 - Type of Protection: Ex tD A21
 - Surface Temperature: T75 °C (T167 °F)
 - Ambient Temperature: -55 °C to +60 °C (-67 °F to +140 °F)
(empty enclosure, temperature to be determine according actuator)
 - CE Declaration of Conformity: 50221
 - ATEX Certificate: LCIE 02 ATEX 6047
 - Index of Protection according EN/IEC 60529: IP66
 - Impact Resistance (shock): IK10

EURASEC Certification

- Certification Type PCe
 - EURASEC RU C-FR Г505.B.00911







Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

Size 1 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

Description/Function		Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number	
Momentary Push Buttons								
	Green insert 'I' + red insert 'O' with 1NO + 1NC momentary contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2A3	
				2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4A3	
				1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3A3	
	Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3A3			
	1x green push button 'I' with 1NO momentary contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2A5	
				2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4A5	
1 x 3/4"				1.0 (2.20)	2.7 (164.80)	U81Z3A5		
Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3A5				
1x red push button 'O' with 1NC momentary contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2A9		
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4A9		
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3A9		
	Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3A9			
	Twin Momentary Push Buttons							
		1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact momentary contacts		Bottom	2 x M20	1.1 (2.43)	2.7 (164.80)	U81W2A5A9
2 x M25					1.1 (2.43)	2.7 (164.80)	U81W4A5A9	
1 x 3/4"					1.1 (2.43)	2.7 (164.80)	U81Z3A5A9	
Feed-Thru		2 x 3/4"	1.1 (2.43)	2.7 (164.80)	U81X3A5A9			
1x green push button 'I' with 1NO + 1NC contact 1x red push button 'O' with 1NO + 1NC contact momentary contacts			Bottom	2 x M20	1.1 (2.43)	2.7 (164.80)	U81W2A3A3	
				2 x M25	1.1 (2.43)	2.7 (164.80)	U81W4A3A3	
	1 x 3/4"			1.1 (2.43)	2.7 (164.80)	U81Z3A3A3		
	Feed-Thru			2 x 3/4"	1.1 (2.43)	2.7 (164.80)	U81X3A3A3	

Additional configurations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for or aluminum.

② Not included if NPT hubs are selected.

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

 **Appleton**

Unicode™ 2 Series Aluminum Control Stations and Switches







Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
Ex II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Size 1 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

Description/Function		Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Emergency Stop							
	Red mushroom head push-pull 1NC maintained contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2D9
				2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4D9
				1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3D9
	Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3D9		
		Bottom		2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2D3
				2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4D3
1 x 3/4"	1.0 (2.20)			2.7 (164.80)	U81Z3D3		
Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3D3			
		Red mushroom head key release 1NC maintained contact	Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2C9
				2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4C9
1 x 3/4"				1.0 (2.20)	2.7 (164.80)	U81Z3C9	
Feed-Thru		2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3C9		
		Bottom		2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2C3
				2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4C3
1 x 3/4"	1.0 (2.20)			2.7 (164.80)	U81Z3C3		
Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3C3			
	Push Pull Emergency Stop + Push Button						
		1x red mushroom head push-pull with 1NC maintained contact		Bottom	2 x M20	1.1 (2.43)	2.7 (164.80)
2 x M25		1.1 (2.43)			2.7 (164.80)	U81W4D9A5	
1 x 3/4"		1.1 (2.43)			2.7 (164.80)	U81Z3D9A5	
1x green push button 'I' with 1NO momentary contact		Feed-Thru		2 x 3/4"	1.1 (2.43)	2.7 (164.80)	U81X3D9A5

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.






Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
 Zone 1 and 2 – 21 and 22
 I/2 GD
 Ex de IIC/Ex demb IIC/ Ex tD A21
 IP66 – IK10

Size 1 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ③.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Mushroom Head Push Button						
 Black mushroom head push button 1NO + 1NC momentary contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2B3
		Bottom	2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4B3
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3B3
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3B3
		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2R9
		Bottom	2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4R9
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3R9
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3R9
Key Push Button						
 With key removable in both positions 1NO + 1NC maintained contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2E3
		Bottom	2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4E3
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3E3
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3E3
		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2E5
		Bottom	2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4E5
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3E5
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3E5
	Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2E9	
	Bottom	2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4E9	
		1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3E9	
	Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3E9	

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Appleton®

Unicode™ 2 Series Aluminum Control Stations and Switches


Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
Ex II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Size 1 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Pilot Light						
1x red pilot light ③		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2PR
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4PR
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3PR
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3PR
1x green pilot light ③		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2PG
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4PG
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3PG
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3PG
1x blue pilot light ③		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2PB
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4PB
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3PB
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3PB
1x yellow pilot light ③		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2PY
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4PY
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3PY
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3PY
1x white pilot light ③		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2PW
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4PW
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3PW
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3PW

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.

③ 12 Vac to 254 Vac 50/60 Hz - 12 Vdc to 60 Vdc.







Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
 Zone 1 and 2 – 21 and 22
 I/2 GD
 Ex de IIC/Ex demb IIC/ Ex tD A21
 IP66 – IK10

Size 1 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

	Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm ³ (in ³)	Catalog Number
Twin Pilot Light							
	1x green pilot light ③ 1x red pilot light ③		Bottom	2 x M20	1.1 (2.43)	2.7 (164.80)	U81W2PGPR
				2 x M25	1.1 (2.43)	2.7 (164.80)	U81W4PGPR
				1 x 3/4"	1.1 (2.43)	2.7 (164.80)	U81Z3PGPR
			Feed-Thru	2 x 3/4"	1.1 (2.43)	2.7 (164.80)	U81X3PGPR
Illuminated Push Button							
	1x green illuminated push button with 1NO contact momentary contacts		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2LG5
				2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4LG5
				1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3LG5
			Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3LG5
	1x red illuminated push button with 1NC contact momentary contacts		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2LR9
				2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4LR9
				1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3LR9
			Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3LR9
Twin Illuminated Push Button							
	1x green illuminated push button with 1NO contact 1x red illuminated push button with 1NC contact momentary contacts		Bottom	2 x M20	1.1 (2.43)	2.7 (164.80)	U81W2LG5LR9
				2 x M25	1.1 (2.43)	2.7 (164.80)	U81W4LG5LR9
				1 x 3/4"	1.1 (2.43)	2.7 (164.80)	U81Z3LG5LR9
			Feed-Thru	2 x 3/4"	1.1 (2.43)	2.7 (164.80)	U81X3LG5LR9

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.

③ 12 Vac to 254 Vac 50/60 Hz - 12 Vdc to 60 Vdc.

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Appleton

Unicode™ 2 Series Aluminum Control Stations and Switches






Increased Safety

ATEX/IECEX:
 Zone 1 and 2 – 21 and 22
 Ex II 2 GD
 Ex de IIC/Ex demb IIC/ Ex tD A21
 IP66 – IK10

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Size 1 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
2-Position Selector Switch						
 2 fixed positions '0 - I' 1NO + 1NC contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2H3
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4H3
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3H3
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3H3
3-Position Selector Switch						
 3 fixed positions 'I - 0 - II' 2NO contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2J1
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4J1
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3J1
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3J1
 3 positions 'I - 0 - II' with spring return from I to 0 1NO + 1NC contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2N3
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4N3
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3N3
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3N3
 3 positions 'I - 0 - II' with spring return from II to 0 1NO + 1NC contact		Bottom	2 x M20	1.0 (2.20)	2.7 (164.80)	U81W2M3
			2 x M25	1.0 (2.20)	2.7 (164.80)	U81W4M3
			1 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81Z3M3
		Feed-Thru	2 x 3/4"	1.0 (2.20)	2.7 (164.80)	U81X3M3

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.






Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

Size 2 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

	Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm ³ (in ³)	Catalog Number	
Twin Push Button								
	1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact momentary contacts		Bottom	2 x M20	1.3 (2.87)	2.7 (164.80)	U82W2A5A9	
				2 x M25	1.3 (2.87)	2.7 (164.80)	U82W4A5A9	
				1 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82Z3A5A9	
				Feed-Thru	2 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82X3A5A9
					2 x M20	1.3 (2.87)	2.7 (164.80)	U82W2A3A3
					2 x M25	1.3 (2.87)	2.7 (164.80)	U82W4A3A3
1x green push button 'I' with 1NO + 1NC contact 1x red push button 'O' with 1NO + 1NC contact momentary contacts			1 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82Z3A3A3		
				Feed-Thru	2 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82X3A3A3
Push Button + Push-Pull Emergency Stop								
	1x green push button 'I' with 1NO momentary contact 1x red mushroom head push-pull with 1NC maintained contact		Bottom	2 x M20	1.3 (2.87)	2.7 (164.80)	U82W2A5D9	
				2 x M25	1.3 (2.87)	2.7 (164.80)	U82W4A5D9	
				1 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82Z3A5D9	
			Feed-Thru	2 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82X3A5D9	
				2 x M20	1.3 (2.87)	2.7 (164.80)	U82W2A3D3	
				2 x M25	1.3 (2.87)	2.7 (164.80)	U82W4A3D3	
1x green push button 'I' with 1NO + 1NC momentary contact 1x red mushroom head push-pull with 1NO + 1NC maintained contact			1 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82Z3A3D3		
				Feed-Thru	2 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82X3A3D3

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Appleton

Unicode™ 2 Series Aluminum Control Stations and Switches








Increased Safety

ATEX/IECEX:
 Zone 1 and 2 – 21 and 22
 Ex II 2 GD
 Ex de IIC/Ex demb IIC/ Ex tD A21
 IP66 – IK10

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Size 2 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm ³ (in ³)	Catalog Number
Twin Push Buttons + Push-Pull Emergency Stop						
 1x green push button 'I' with 1NO contacts 1x red push button 'O' with 1NC contacts momentary contacts 1x red mushroom head push-pull with 1x NC maintained contact		Bottom	2 x M20	1.3 (2.87)	2.7 (164.80)	U82W2A5A9D9
		Bottom	2 x M25	1.3 (2.87)	2.7 (164.80)	U82W4A5A9D9
		Feed-Thru	1 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82Z3A5A9D9
		Feed-Thru	2 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82X3A5A9D9
Pilot Light + Push Button						
1x green light ③ 1x green push button 'I' with 1NO momentary contact		Bottom	2 x M20	1.2 (2.65)	2.7 (164.80)	U82W2PGA5
		Bottom	2 x M25	1.2 (2.65)	2.7 (164.80)	U82W4PGA5
		Feed-Thru	1 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82Z3PGA5
		Feed-Thru	2 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82X3PGA5
 1x green light ③ 1x green push button 'I' with 1NO + 1NC momentary contacts		Bottom	2 x M20	1.2 (2.65)	2.7 (164.80)	U82W2PGA3
		Bottom	2 x M25	1.2 (2.65)	2.7 (164.80)	U82W4PGA3
		Feed-Thru	1 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82Z3PGA3
		Feed-Thru	2 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82X3PGA3
1x red light ③ 1x red push button 'O' with 1NC momentary contact		Bottom	2 x M20	1.2 (2.65)	2.7 (164.80)	U82W2PRA9
		Bottom	2 x M25	1.2 (2.65)	2.7 (164.80)	U82W4PRA9
		Feed-Thru	1 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82Z3PRA9
		Feed-Thru	2 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82X3PRA9
1x red light 1x red push button 'O' with 1NO + 1NC momentary contact		Bottom	2 x M20	1.2 (2.65)	2.7 (164.80)	U82W2PRA3
		Bottom	2 x M25	1.2 (2.65)	2.7 (164.80)	U82W4PRA3
		Feed-Thru	1 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82Z3PRA3
		Feed-Thru	2 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82X3PRA3

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.

③ 12 Vac to 254 Vac 50/60 Hz - 12 Vdc to 60 Vdc.




Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
 Zone 1 and 2 – 21 and 22
 IIC GD
 Ex de IIC/Ex demb IIC/ Ex tD A21
 IP66 – IK10

Size 2 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Pilot Light + Twin Push Buttons ③						
 1x green light ③ 1x green push button 'I' with 1NO 1x red push button 'O' with 1NC momentary contacts		Bottom	2 x M20	1.3 (2.87)	2.7 (164.80)	U82W2PGA5A9
			2 x M25	1.3 (2.87)	2.7 (164.80)	U82W4PGA5A9
			1 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82Z3PGA5A9
		Feed-Thru	2 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82X3PGA5A9
Twin Pilot Lights + Twin Push Buttons						
 1x green light + 1x red light ② 1x green push button 'I' with 1NO 1x red push button 'O' with 1NC momentary contacts		Bottom	2 x M20	1.3 (2.87)	2.7 (164.80)	U82W2PGPRA5A9
			2 x M25	1.3 (2.87)	2.7 (164.80)	U82W4PGPRA5A9
			1 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82Z3PGPRA5A9
		Feed-Thru	2 x 3/4"	1.3 (2.87)	2.7 (164.80)	U82X3PGPRA5A9
Ammeter + 3-Position Selector Switch						
 1x ammeter 48 x 48 mm, 1A C.T., 3 F.L.C., with 0 - 1 - 3 scale 1x switch 3 positions 'I - 0 - II' with spring return from II to 0 1NO + 1NC contact		Bottom	2 x M20	1.2 (2.65)	2.7 (164.80)	U82W2VA13M3
			2 x M25	1.2 (2.65)	2.7 (164.80)	U82W4VA13M3
			1 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82Z3VA13M3
		Feed-Thru	2 x 3/4"	1.2 (2.65)	2.7 (164.80)	U82X3VA13M3

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.

③ 12 Vac to 254 Vac 50/60 Hz - 12 Vdc to 60 Vdc.

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Appleton

Unicode™ 2 Series Aluminum Control Stations and Switches



Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
Ex II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10






CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Size 3 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Twin Push Buttons + Push-Pull Emergency Stop ③						
 1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact momentary contacts 1x red mushroom head push-pull emergency button with 1NO + 1NC maintained contacts		Bottom	2 x M20	1.6 (3.53)	4.2 (256.30)	U83W2A5A9D3
		Bottom	2 x M25	1.6 (3.53)	4.2 (256.30)	U83W4A5A9D3
			1 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83Z3A5A9D3
		Feed-Thru	2 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83X3A5A9D3

Pilot Light + Twin Push Buttons

 1x green light ③ 1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact momentary contacts		Bottom	2 x M20	1.6 (3.53)	4.2 (256.30)	U83W2PGA5A9
		Bottom	2 x M25	1.6 (3.53)	4.2 (256.30)	U83W4PGA5A9
			1 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83Z3PGA5A9
		Feed-Thru	2 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83X3PGA5A9
1x red light ③ 1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact momentary contacts		Bottom	2 x M20	1.6 (3.53)	4.2 (256.30)	U83W2PRA5A9
		Bottom	2 x M25	1.6 (3.53)	4.2 (256.30)	U83W4PRA5A9
			1 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83Z3PRA5A9
		Feed-Thru	2 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83X3PRA5A9
1x green light ③ 1x green push button 'I' with 1NO + 1NC contact 1x red push button 'O' with 1NO + 1NC contact momentary contacts		Bottom	2 x M20	1.6 (3.53)	4.2 (256.30)	U83W2PGA3A3
		Bottom	2 x M25	1.6 (3.53)	4.2 (256.30)	U83W4PGA3A3
			1 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83Z3PGA3A3
		Feed-Thru	2 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83X3PGA3A3
1x red light ③ 1x green push button 'I' with 1NO + 1NC contact 1x red push button 'O' with 1NO + 1NC contact momentary contacts		Bottom	2 x M20	1.6 (3.53)	4.2 (256.30)	U83W2PRA3A3
		Bottom	2 x M25	1.6 (3.53)	4.2 (256.30)	U83W4PRA3A3
			1 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83Z3PRA3A3
		Feed-Thru	2 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83X3PRA3A3

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.

③ 12 Vac to 254 Vac 50/60 Hz - 12 Vdc to 60 Vdc.









Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
Ex II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

Size 3 Aluminum Control Station

Included: 1 white self-adhesive laminated plastic nameplate, 1 brass earth continuity plate ①, 1 blanking plug ②, 1 cable gland ②.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm ³ (in ³)	Catalog Number
Triple Illuminated Push Buttons ③						
 1x green illuminated push button with 1NO contact 1x blue illuminated push button with 1NO + 1NC contact 1x red illuminated push button with NC contact momentary contacts		Bottom	2 x M20	1.6 (3.53)	4.2 (256.30)	U83W2LG5LB3LR9
			2 x M25	1.6 (3.53)	4.2 (256.30)	U83W4LG5LB3LR9
			1 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83Z3LG5LB3LR9
		Feed-Thru	2 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83X3LG5LB3LR9
Pilot Light + Twin Push Buttons + Push-Pull Emergency Stop						
 1x green light 1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact momentary contacts 1x red mushroom head push-pull with 1x NC maintained contact		Bottom	2 x M20	1.6 (3.53)	4.2 (256.30)	U83W2PGA5A9D9
			2 x M25	1.6 (3.53)	4.2 (256.30)	U83W4PGA5A9D9
			1 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83Z3PGA5A9D9
		Feed-Thru	2 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83X3PGA5A9D9
Twin Pilot Lights + Push-Pull Emergency Stop + Push Button ②						
 1x green light + 1x red light ③ 1x red mushroom head push-pull with 1x NC maintained contact 1x green push button 'I' with 1NO momentary contact		Bottom	2 x M20	1.6 (3.53)	4.2 (256.30)	U83W2PGPRD9A5
			2 x M25	1.6 (3.53)	4.2 (256.30)	U83W4PGPRD9A5
			1 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83Z3PGPRD9A5
		Feed-Thru	2 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83X3PGPRD9A5
Ammeter + Twin Push Buttons						
 1x ammeter 48 x 48 mm, 1A C.T., 3 F.L.C., with 0 - 1 - 3 scale 1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact momentary contacts		Bottom	2 x M20	1.6 (3.53)	4.2 (256.30)	U83W2VA13A5A9
			2 x M25	1.6 (3.53)	4.2 (256.30)	U83W4VA13A5A9
			1 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83Z3VA13A5A9
		Feed-Thru	2 x 3/4"	1.6 (3.53)	4.2 (256.30)	U83X3VA13A5A9

Additional combinations available, please refer to Unicode 2 Series - Customized Control Stations section.

① Not required for aluminum.

② Not included if NPT hubs are selected.

③ 12 Vac to 254 Vac 50/60 Hz - 12 Vdc to 60 Vdc.

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

 **Appleton**

Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Appleton®

Nameplates — Set of 10

Blank self-adhesive, laminated plastic 58 mm x 18 mm (2.29" x 0.71").

Color	Catalog Number
White (black letters)	UNPW
Yellow (black letters)	UNPY
Red (white letters)	UNPR
Blue (white letters)	UNPB
Black (white letters)	UNPN
Green (white letters)	UNPG

Inserts for Push Button — Set of 5

Marking	Color	Catalog Number
(unmarked)	Green	UIAG
(unmarked)	Red	UIAR
(unmarked)	Yellow	UIAY
(unmarked)	White	UIAW
(unmarked)	Blue	UIAB
(unmarked)	Black	UIAN
ON	Green	UIA01
OFF	Red	UIA02
START	Green	UIA03
STOP	Red	UIA04
MARCHE	Green	UIA05
ARRET	Red	UIA06
I	Green	UIA07
O	Red	UIA08

Inserts for Illuminated Push Button — Set of 5

Marking	Color	Catalog Number
(unmarked)	Green	UILG
(unmarked)	Red	UILR
(unmarked)	Yellow	UILY
(unmarked)	White	UILW
(unmarked)	Blue	UILB
ON	Green	UIL01
OFF	Red	UIL02
START	Green	UIL03
STOP	Red	UIL04
MARCHE	Green	UIL05
ARRET	Red	UIL06
I	Green	UIL07
O	Red	UIL08

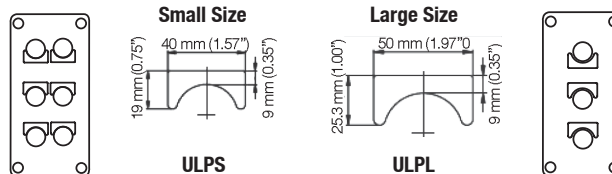
Spare Key

For all key-operated buttons.

Description	Catalog Number
Spare key type 4 A 185	SK4A185

Standard Legend Plates

Two sizes available. Self-adhesive yellow laminated plastic (black lettering).






Text	Catalog Number	
	Small	Large
Blank (set of 10)	ULPS	ULPL
ON	ULPSA01	ULPLA01
OFF	ULPSA02	ULPLA02
FORWARD	ULPSA03	ULPLA03
REVERSE	ULPSA04	ULPLA04
JOG	ULPSA05	ULPLA05
RUN	ULPSA06	ULPLA06
START	ULPSA07	ULPLA07
STOP	ULPSA08	ULPLA08
UP	ULPSA09	ULPLA09
DOWN	ULPSA10	ULPLA10
FAST	ULPSA11	ULPLA11
SLOW	ULPSA12	ULPLA12
RAISE	ULPSA13	ULPLA13
LOWER	ULPSA14	ULPLA14
OPEN	ULPSA15	ULPLA15
CLOSE	ULPSA16	ULPLA16
LOW	ULPSA17	ULPLA17
HIGH	ULPSA18	ULPLA18
TEST	ULPSA19	ULPLA19
RESET	ULPSA20	ULPLA20
EMERGENCY STOP	ULPSA21	ULPLA21
MARCHE	ULPSA22	ULPLA22
ARRET	ULPSA23	ULPLA23
ARRET D'URGENCE	ULPSA24	ULPLA24
HAUT	ULPSA25	ULPLA25
BAS	ULPSA26	ULPLA26
O—I	ULPSH01	ULPLH01
ON—OFF	ULPSH02	ULPLH02
START—STOP	ULPSH03	ULPLH03
STOP—START	ULPSH04	ULPLH04
HAND—AUTO	ULPSH05	ULPLH05
MANU—AUTO	ULPSH06	ULPLH06
FORWARD—REVERSE	ULPSH07	ULPLH07
REMOTE—LOCAL	ULPSH08	ULPLH08
MARCHE—ARRET	ULPSH09	ULPLH09
I—O—II	ULPSJ01	ULPLJ01
OFF—O—ON	ULPSJ02	ULPLJ02
START—NORMAL—STOP	ULPSJ03	ULPLJ03
HAND—OFF—AUTO	ULPSJ04	ULPLJ04
MANU—O—AUTO	ULPSJ05	ULPLJ05
FORWARD—OFF—REVERSE	ULPSJ06	ULPLJ06
LOCAL—REMOTE—AUTO	ULPSJ07	ULPLJ07
LOCAL—O—REMOTE	ULPSJ08	ULPLJ08
MARCHE—NORMAL—ARRET	ULPSJ09	ULPLJ09

Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety

ATEX/IECEX:
Zone 1 and 2 – 21 and 22
II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

	Description	Catalog Number
	Additional Contacts	
	Each actuator is capable of activating 3 contacts. Exception: Illuminated push button and all actuators with key: 2 contacts maximum	
	1NO contact	UCB5R
	1NC contact	UCB9R
	Yellow Guard	
	Mushroom head protection for emergency stop	098657
	Padlockable Guard	
	Stainless steel and plastic cover, capacity: 3 padlocks diameter 6 mm (0.24") maximum (not supplied)	
	For push button and rotary actuator	UPLD1S
	For mushroom head actuator	UPLD2S
	Cable Gland Exe	
	For unarmored cable Exe - IP66 - in polyamide entry thread seal	
	M20 (capacity 6.5-14.5 mm)	095605
	For armored cable Exe/Exd - IP66 - in nickel plated brass (without entry thread seal)	
	Braid and Tape type:	
	M20 (inner: 6.4-14.0/outer: 12.5-20.9 mm)	20E1FX5
	Single Wired Armor (SWA):	
	M20 (inner: 6.4-14.0/outer: 12.5-20.9 mm)	20E1FW5
	Adaptors	
	Exd/Exe - IP66 in nickel plated brass (without entry thread seal)	
	Male M20 - Female 1/2" NPT	737DM2T15
	Male M20 - Female 3/4" NPT	737DM2T25
	Entry Thread Seal	
	M20 (in white nylon)	20ETS2
	Combination Drain and Breather	
	Exe - IP66 - supplied with entry thread seal and locknut	
	M20 male thread in Polyamide	DBE20P
	M20 male thread in Brass	DBE20B
	M20 male thread in Stainless Steel	DBE20S
	Feed-Thru Earth Stud Terminal	
	Exe - IP66 – supplied with weatherproof seal and green/yellow earth conductor – 300 mm (11.81") length	
	M20 with M5 earth and 2.5 mm ² (0.004 in ²) conductor	PREESTM20

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

Appleton®


Unicode™ 2 Series Aluminum Control Stations and Switches

Increased Safety


ATEX/IECEX:
Zone 1 and 2 – 21 and 22
II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS


Dimensions in Millimeters (Inches)



Size 1 Box



Size 2 Box



Size 3 Box

Mounting/Fixing Details for above Boxes: Two Holes Ø 5 mm (0.20")