


AGSEW Control Operators: Selector Switch Components

Explosionproof

Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

Catalog Numbering Guide

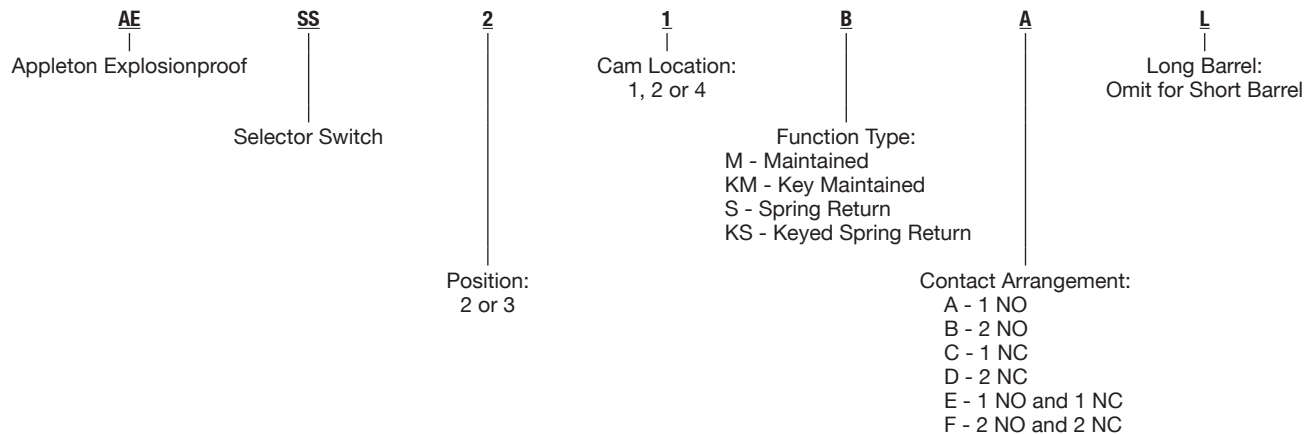

Two Position — Maintained Contact

Contact	Lever Position X=Closed, O=Open		Catalog Number		Contact Block Position		Cam Location
	Left	Right	Standard Bushing	Long Bushing	L	R	
1	O	X	AESS22MG	AESS22MG-L	NO	-	2
1	X	O	AESS22MH	AESS22MH-L	NC	-	2
1	O	X	AESS22ML	AESS22ML-L	NC	NO	2
2	X	O					
1	O	X	AESS22MM	AESS22MM-L	NC	NC	2
2	O	X					
1	X	O	AESS22MR	AESS22MR-L	NOC	NOC	2
2	O	X					
3	X	O					
4	O	X					

NOTE: Use long barrel devices on enclosure applications with cover thickness exceeding 7/8 inch.
 For legend plates, see Options, Accessories and Nameplates. All Operators are 3/4" NPSM.

ACSEW Control Operators: Selector Switch Components

Explosionproof

Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

Controls

CONTROLS: HAZARDOUS LOCATION CONTROL STATIONS AND SWITCHES

Two Position – Spring Return Right to Center

Contact	Lever Position X=Closed, O=Open		Catalog Number		Contact Block Position		Cam Location
	Left	Right	Standard Bushing	Long Bushing	L	R	
1	O	X	AESS22SG	AESS22SG-L	NO	-	2
1	X	O	AESS22SH	AESS22SH-L	-	NO	2
1	O	X	AESS22SL	AESS22SL-L	NO	NO	2
2	X	O					
1	O	X	AESS22SM	AESS22SM-L	NO	NC	2
2	O	X					
1	X	O	AESS22SR	AESS22SR-L	2NC	2NC	2
2	O	X					
3	X	O					
4	O	X					

Three Position – Maintained Contact

Contact	Lever Position X=Closed, O=Open			Catalog Number		Contact Block Position		Cam Location
	Left	Center	Right	Standard Bushing	Long Bushing	L	R	
1	O	O	X	AESS31MN	AESS31MN-L	NO	NO	1
2	X	O	O					
1	X	O	O	AESS31MQ	AESS31MQ-L	NOC	NO	1
2	O	X	X					
1	O	O	X	AESS34MN	AESS34MN-L	NO	NC	4
2	O	X	O					
1	X	O	O	AESS32MN	AESS32MN-L	NC	NO	2
2	O	X	O					
1	O	O	X	AESS31MS	AESS31MS-L	2NO	2NO	1
2	X	O	O					
3	O	O	X					
4	X	O	O					
1	O	O	X	AESS34MS	AESS34MS-L	2NO	2NC	4
2	O	X	O					
3	O	O	X					
4	O	X	O					
1	X	O	O	AESS32MS	AESS32MS-L	2NC	2NO	2
2	O	X	O					
3	X	O	O					
4	O	X	O					

NOTE: Use long barrel devices on enclosure applications with cover thickness exceeding 7/8 inch.
 See options page for legend plates. All Operators are 3/4" NPSM.