


# Stylmaster™ Strobe Luminaires

## Enclosed and Gasketed

**NEC: Pendant Mount**  
 Class I, Division 2, Groups A, B, C, D  
 Class II, Division 1 and 2, Groups E, F, G  
 Class III  
 NEMA 3R, 4  
 Marine Outside Type (Saltwater)

**NEC: Ceiling and Wall Bracket Mount**  
 Class I, Division 2, Groups A, B, C, D  
 NEMA 3R, 4

**CEC:**   
 Class I, Division 2, Groups A, B, C, D  
 Class II, Division 1 and 2, Groups E, F, G  
 Class III  
 CSA Enclosure 3

### Applications

- Enclosed and gasketed fixtures suitable for use in:
  - Marine and wet locations
  - Industrial processing
  - Chemical processing
  - Areas where flammable gases and vapors are present under conditions defined by NEC Class I, Division 2; Class II, Division 1 and 2; and Class III
- For use in areas where audible signals cannot be heard.
- Used to warn of unsafe conditions and other communication needs.
- Fixtures are also suited for use in non-hazardous areas where there are:
  - Severe weather conditions
  - Excessive moisture, dirt, dust
  - Corrosive atmospheres
  - High ambient temperatures are encountered
- Typical applications include:
  - Pulp and paper mills
  - Processing plants
  - Chemical plants
  - Oil refineries
  - Foundries
  - Manufacturing plants
  - Storage areas
  - Marine applications

### Features

- Modern styling, with clean-line mounting hood and prismatic glass globe, plus optional guard.
- Globe seats firmly against silicone gasket in mounting hood to keep out dirt and moisture. Full threads eliminate “cross threading.”
- Optional guard protects glass from damage and has exclusive snap-on attachment feature for quick installation and fast servicing.
- Fixtures operate safely in high ambient temperatures.
- Strobe: 65 flashes per minute. 800,000 peak candlepower.
- Fixtures are complete with lamp.
- Lens available in five colors: red, amber, blue, green and clear (factory installed).
- Heat- and impact-resistant globes have smooth dust-resistant exterior.
- Fixture is suitable for mounting globe up or globe down utilizing pendant, ceiling or wall bracket type mounts.
- Minimum operating temperature is -13 °F/-25 °C.

### Standard Materials

- Mounting hoods: copperfree (4/10 of 1% max.) aluminum
- Guards: pressure cast copperfree (4/10 of 1% max.) aluminum
- Globes: prismatic glass

### Standard Finish

- Mounting hoods and guards: powder coat epoxy

### Certifications and Compliances

- UL Standard: UL 1203, UL 1638
- UL Listed: E207738
- CSA Standard: C22.2 No. 25
- cUL Listed: E207738

 CSA Certification only.



Fixtures are suitable for mounting in any position – including globe up or globe down – utilizing pendant, ceiling or wall bracket type mounts.

# Stylmaster™ Strobe Luminaires

## Enclosed and Gasketed


**NEC: Pendant Mount**  
 Class I, Division 2, Groups A, B, C, D  
 Class II, Division 1 and 2, Groups E, F, G  
 Class III  
 NEMA 3R, 4  
 Marine Outside Type (Saltwater)

**NEC: Ceiling and Wall Bracket Mount**  
 Class I, Division 2, Groups A, B, C, D  
 NEMA 3R, 4

**CEC:**  
 Class I, Division 2, Groups A, B, C, D  
 Class II, Division 1 and 2, Groups E, F, G  
 Class III  
 CSA Enclosure 3

Order using catalog numbering guide below or select catalog number from tables on following pages.

### Catalog Numbering Guide For VP Stylmaster Strobe Luminaires

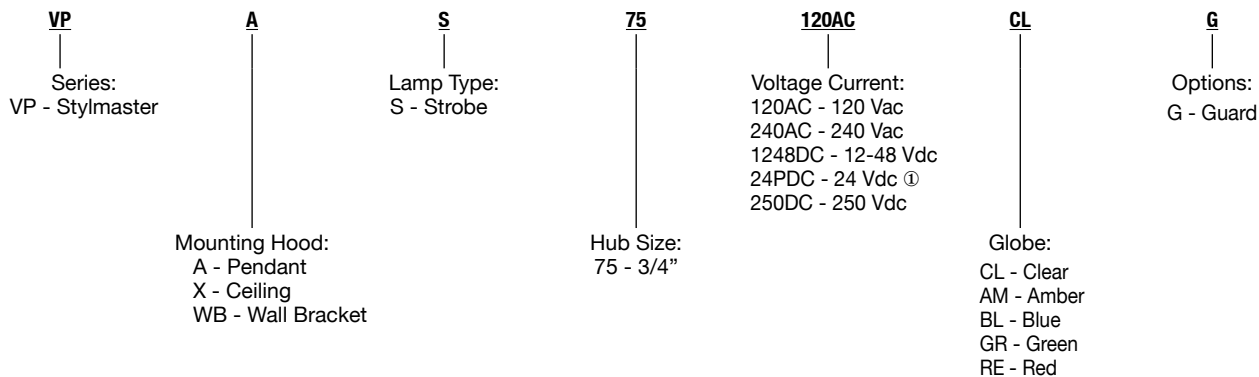

### Technical Data: Thermal Suitability of Stylmaster Strobe

#### Operating Temperatures

Ambient Temp. (°F/°C)	Class I, Division 2 Groups A,B,C,D Pendant, Ceiling and Wall Bracket	Class II, Division 1 & 2 and Class III Pendant Mount
104/40	T2A	T4A
131/55	T2	T4A
149/65	T1	T4

Operating Temperatures Represent the Maximum Internal Temperature for Class I, Division 2 Locations and Maximum Surface Temperature Under Dust Blanket for Class II, Division 1 Locations.

"T" Number	T1	350	325	T2	T2A	T2B	T2C	T2D	T3	T3A	T3B	T3C	T4	T4A	T5	T6
Temp. Range (°F)	664-842	619-662	574-617	538-572	502-536	448-500	421-446	394-419	358-392	331-356	322-329	277-320	250-275	214-248	187-212	185
Temp Range (°C)	351-450	326-350	301-325	281-300	261-280	231-260	216-230	201-215	181-200	166-180	161-165	136-160	121-135	101-120	86-100	85

NOTE: The maximum operating temperature of the fixture must not exceed the ignition temperature of the gas, vapor or dust to be encountered per the National Electrical Code and the Canadian Electrical Code.

① Diode Polarized (current limiter supplied as standard).


⚡ CSA Certification only.

# Stylmaster™ Strobe Luminaires




## Enclosed and Gasketed

**NEC: Pendant Mount**  
 Class I, Division 2, Groups A, B, C, D  
 Class II, Division 1 and 2, Groups E, F, G  
 Class III  
 NEMA 3R, 4  
 Marine Outside Type (Saltwater)

**NEC: Ceiling and Wall Bracket Mount**  
 Class I, Division 2, Groups A, B, C, D  
 NEMA 3R, 4


**CEC:**   
 Class I, Division 2, Groups A, B, C, D  
 Class II, Division 1 and 2, Groups E, F, G  
 Class III  
 CSA Enclosure 3

LIGHTING: ENCLOSED AND GASKETED – VISUAL SIGNAL

	Volts	Wt. (lbs/kg)	Catalog Number ①
<b>Pendant – Rigid Conduit One Hub 3/4" NPT</b>			
	120 Vac	4.5/2.0	VPAS75120ACCL
	240 Vac		VPAS75240ACCL
	250 Vdc		VPAS75250DCCL
	12-48 Vdc		VPAS751248DCCL
	24 Vdc		VPAS7524DCCL ②
<b>Ceiling – Rigid Conduit Four Hubs 3/4" NPT Three Close-Up Plugs</b>			
	120 Vac	5.3/2.4	VPXS75120ACCL
	240 Vac		VPXS75240ACCL
	250 Vdc		VPXS75250DCCL
	12-48 Vdc		VPXS751248DCCL
	24 Vdc		VPXS7524DCCL ②
<b>Wall Bracket – Rigid Conduit Four Hubs 3/4" NPT Three Close-Up Plugs</b>			
	120 Vac	6.4/2.9	VPWBS75120ACCL
	240 Vac		VPWBS75240ACCL
	250 Vdc		VPWBS75250DCCL
	12-48 Vdc		VPWBS751248DCCL
	24 Vdc		VPWBS7524DCCL ②
<b>Optional Aluminum Guard</b>			
		1.0/0.5	VPGU-1

① Catalog numbers shown are supplied with clear lens. To order colored lens, replace the last digits of catalog number **CL** with **AM** for amber, **BL** for blue, **GR** for green or **RE** for red.

② Diode Polarized (current limiter supplied as standard).


 CSA Certification only.

# Stylmaster™ Strobe Luminaire Replacement Parts and Dimensions

## Enclosed and Gasketed

### Replacement Parts

Replacement Lamps	Fixture Type	Lamp Type	Voltage	Base Type	Catalog Number
	Strobe	Xenon	All	Octal Socket	S865



S865

Replacement Globes and Inserts	Glass Globe	Catalog Number	Insert (in addition to Glass Globe)
	Clear	VPGL-1HR	Clear
			Amber
			Blue
			Green
			Red



### Dimensions

