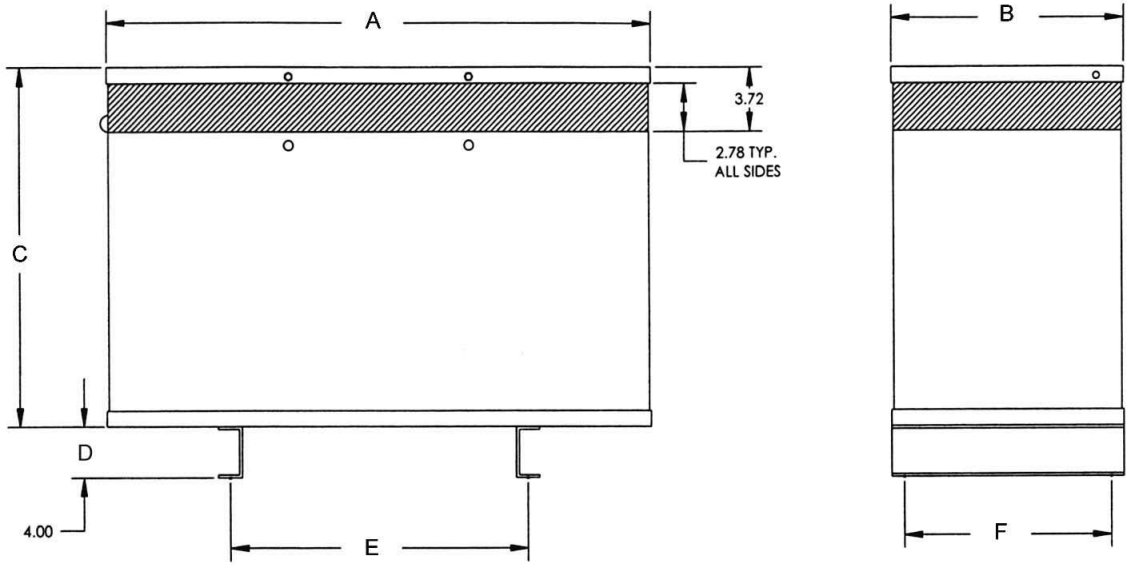

NOTES:
1. ▨ DENOTES CONDUIT AREA.

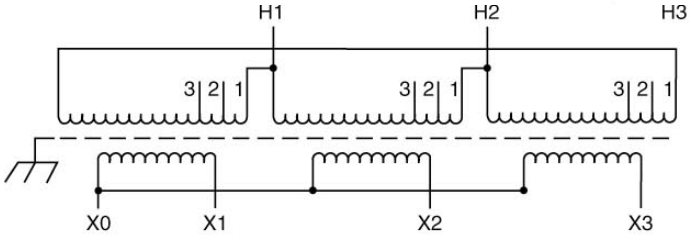

Primary Volts	%	Connect Leads to Tap No.
208	100	1
198	95	2
187	90	3
Secondary Volts		
208		X1, X2, X3
120 1 phase		X1 & X0 X2 & X0 X3 & X0

KVA	CATALOG NUMBER	VOLTAGE		Enclosure	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
15	**T-3-79271-1S**	208Δ	208Y/120	NEMA-3R	245 Lbs	3ϕ	60 Hz

	A	B	C	D	E	F
(In.)	20.30	9.03	14.86	4.00	13.25	7.00

Revisions

ACME ELECTRIC

CD SHEET

Type No.

DRAWN: ADR

DESIGN

CHK. | APP.

MAT'L

FINISH

SCALE | SHEET

					A	PRINTS TO	CONTROL 7