




GECTT-2-6TB

Class I, Div. 1 & 2, Groups C,D
Class I, Zones 1 & 2, Groups IIB, IIA
Class II, Div. 1 & 2, Groups E,F,G
Class III
NEMA 7(C,D), 9(E,F,G)

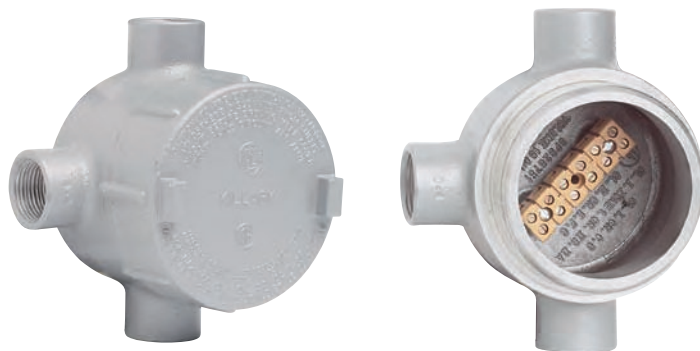

Listed - File E10514



Certified - File LR11716

FEATURES-SPECIFICATIONS

Applications

GE series conduit boxes with terminals are installed in conduit systems within hazardous areas to:

- Protect conductors in threaded rigid conduit
- Act as pull and splice boxes
- Interconnect lengths of conduit
- Change conduit direction
- Provide access to conductors for maintenance and future system changes
- Used to link electrical wires. Primary circuit brought into the enclosure is distributed to field control devices or sensors

Features

- Water shedding cover-suitable for wet locations when mounted in upright position
- External cover threads on body protecting conductors from damage during pulling
- No pinching of conductors during cover installation



- Three different hub arrangements
- Taper threaded hubs to provide ground continuity
- Smooth integral hub bushing to protect conductor insulation when pulling
- Weather-resistant finish
- Green ground screw standard in all boxes
- Weidmuller 6 point MK3 terminal block is mounted inside box on raised pads

- Terminal rated 300V max/20 AMP/for wire size #22--12AWG
- Hub type XTF furnished with mounting flange


Material/Finish

- Body and cover are copper-free aluminum (less than 4/10 of 1%)
- Finish-Electrostatically applied powder coating



GE SERIES OUTLET BOX WITH 6 POINT TERMINAL BLOCK										
HUB TYPE	CATALOG NUMBER	HUB SIZE	A	B	C	D	E	F	COVER OPENING	VOLUME CU. IN.
C	GECTT-2-6TB	3/4"	3-11/16" (94)	3-5/8" (92)	2-11/16" (68)	2-3/4" (70)	1" (25)	13/16" (21)	2-11/16" (68)	19
T	GECTT-2-6TB	3/4"								
X	GECTT-2-6TB	3/4"								
XTF	GECTT-2-6TB	3/4"								





C Type



T Type



X Type



**XTF Type
With Mounting Flange**



KILLARK®