



C Type

- Suitable for wet locations when used with gasketed covers.
- Federal Specification W-C-586D/A-A 50563.
- Suitable for use in hazardous location applications when installed according to NEC Articles 501.10(b), Class I, Div. 2, (Suitable for use in Class I Zone 2 applications) 502.10 and 503.10.

Listed File No. E3397

Certified File No. LR11852

## FEATURES-SPECIFICATIONS

## DURALOY® 8

## Applications

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC.

## Features

- Completely interchangeable with competitive bodies, gaskets, and covers
- Flat back design provides greater cubic capacity for easier wire pulling and more room for splicing
- Raintight when used with gasketed covers
- Stainless steel screws on stamped and cast covers
- Smooth integral wire bushings

## Material/Finish


## Duraloy Class 30 Gray Iron Alloy

- Tri-coat finish of electrozinc, chromate sealant, and electrostatically applied powder coating.

| C TYPE CONDUIT BODY* |          |               |                |               |              |                |   |              |                |
|----------------------|----------|---------------|----------------|---------------|--------------|----------------|---|--------------|----------------|
| CATALOG NUMBER       | HUB SIZE | DIMENSIONS    |                |               |              |                |   |              | VOLUME CU. IN. |
|                      |          | A             | B              | C             | D            | E              | F | G            |                |
| C18                  | 1/2"     | 5-5/16" (135) | 1-15/32" (37)  | 1-15/32" (37) | 1" (25)      | 3-9/32" (83)   | — | 5/8" (16)    | 5.0            |
| C28                  | 3/4"     | 6-9/16" (167) | 1-11/16" (43)  | 1-21/32" (42) | 1-3/16" (30) | 3-15/16" (100) | — | 3/4" (19)    | 8.0            |
| C38                  | 1"       | 7-9/16" (192) | 1-31/32" (50)  | 1-27/32" (47) | 1-3/8" (35)  | 4-17/32" (115) | — | 7/8" (22)    | 12.25          |
| C448                 | 1-1/4"   | 8-7/16" (214) | 2-3/8" (60)    | 2-5/32" (55)  | 1-3/4" (44)  | 5-15/16" (151) | — | 1-3/32" (28) | 23.25          |
| C58                  | 1-1/2"   | 10-3/8" (264) | 2-25/32" (71)  | 2-25/32" (71) | 2-3/32" (53) | 6-1/2" (165)   | — | 1-3/8" (35)  | 42.50          |
| C68                  | 2"       | 12-3/8" (314) | 3-9/16" (90)   | 3-27/32" (98) | 3" (76)      | 8-5/8" (219)   | — | 1-7/8" (48)  | 105.00         |
| C78                  | 2-1/2"   | 15-5/8" (397) | 4-7/16" (113)  | 5" (127)      | 4-1/4" (108) | 10-7/8" (276)  | — | 2-1/2" (64)  | 200.00         |
| C88                  | 3"       | 15-5/8" (397) | 4-13/16" (122) | 5" (127)      | 4-1/4" (108) | 10-7/8" (276)  | — | 2-1/2" (64)  | 217.00         |

\* For conduit body packaged with cover and gasket, add **CG** to the catalog number.

## Dimensions

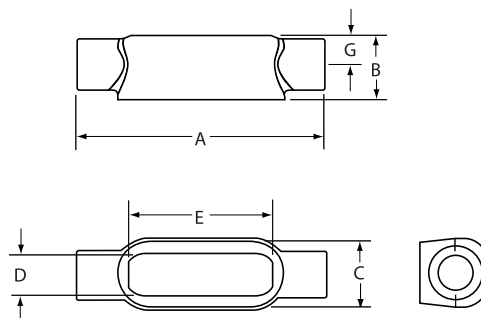

C Type



KILLARK®