




GENERAL INFORMATION:

Catalog number: See table below
Description: 10/3 SRDT, 125/250V 30A dryer power supply cord kit with flanged spade terminals and metal strain relief
Approvals: UL Listed

CONSTRUCTION PARAMETERS:

Cable type: SRDT, flat, gray
Insulation and jacket material: PVC, integral insulation and jacket
Conductors: (3) 10 AWG, bare copper
Conductor identification: Center conductor (neutral) is ribbed
Overall cable dimensions (nom): 0.825 x 0.325"
Temperature rating: -20 to +60 deg C

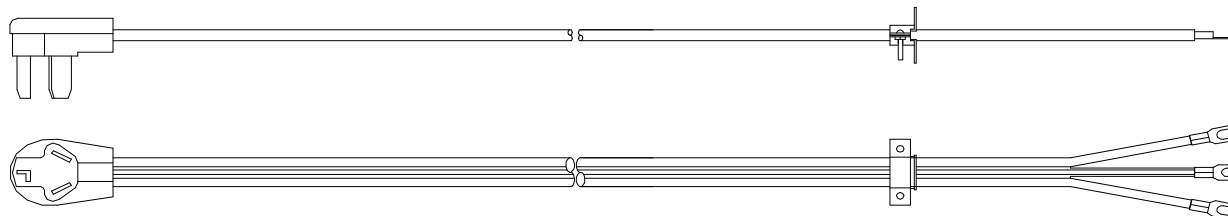

Note: Plug style may vary

Plug configuration: NEMA 10-30P
Plug electrical ratings: 125/250 VAC, 30A
Plug material: PVC, gray
Terminals: 1/4" flanged spade
Strain relief: Metal, included but not attached

CATALOG NUMBERS:

Catalog number	Length	Case qty	UPC
91248809	4 ft	6	0 29892 09124 8
91258809	5 ft	6	0 29892 09125 5
91268809	6 ft	6	0 29892 09126 2

This product complies with European Directive 2011/65/EU (RoHS-2),

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part.

We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is the proprietary intellectual property of Southwire Company LLC. Any information contained herein shall not be disclosed to any party without the written consent of Southwire Company LLC.