

CATALOG NO. \_\_\_\_\_


TYPE NO. \_\_\_\_\_

JOB NAME \_\_\_\_\_

# FloodPak Series (FPM)

## ORDERING INFORMATION

Catalog Number: Example: FPM175MAL-8

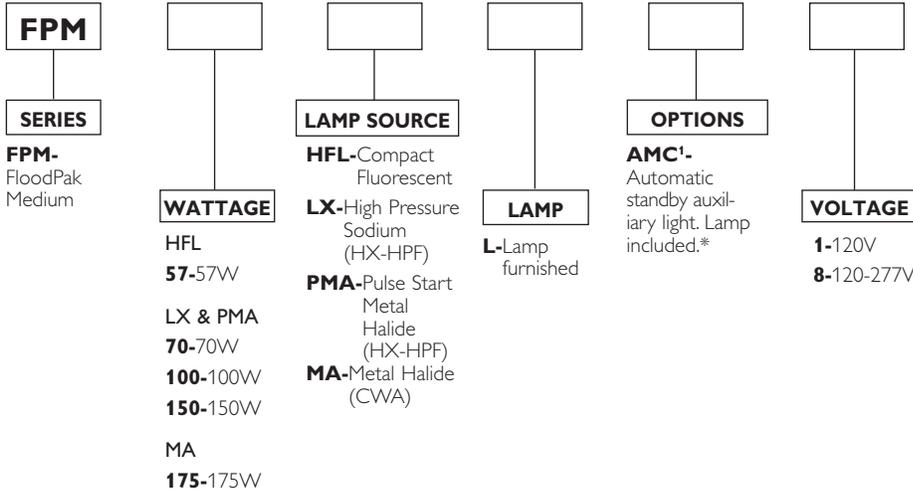

## PRODUCT SPECIFICATIONS

- The FloodPak is a perfect blend of architectural design and performance.
- The FloodPak can be surface mounted in various positions. Use it as a cut-off wallpack or tip it up 22.5° for forward throw with semi-cut-off. Tip it up 45° for floodlighting, or turn it over and use it for indirect/accent lighting.
- The FloodPak can also be pole mounted or ground mounted using mounting accessories.
- Precision die cast aluminum construction. All exposed hardware is stainless steel.
- Duraplex II dark bronze polyester powder finish is standard but the FloodPak is available in a variety of designer colors.
- Hinged door frame with clear tempered glass lens.
- Multi-faceted reflection system provides uniform distribution.
- Injection molded triple finger silicone gasket.
- UL wet location listed for above or below horizontal aiming.
- Complete with a UL approved mounting box rated for 90°C supply wire with integral bubble level.
- Integral heat sink ensures cool operation.
- Meets IESNA cut-off requirements.
- Contractor Friendly design with integral cable permitting easy, hands free wiring.

HID units supplied with clear medium base lamp.  
1. AMC not available on 175W fixtures.

## ACCESSORIES

**FPSKNUCKLE** - 1/2" Adjustable Knuckle.

**FPSARM** - Shoebox Arm. Converts FloodPak to pole-mount (minimum 4" square pole).

**FP2** - Single hole round cover for use with standard 4" round surface boxes.

**FP4A** - Single hole FS style cover for use on standard single gang FS boxes.


**FP4B** - Three hole FS style cover cover for use on standard single gang FS boxes.

**FPMSHIELD** - Vandal Shield. Helps protect lens and lamp from breakage. Clear polycarbonate shield snaps in place over glass lens.

**FPSRPA** - Round pole adapter.

**FPM552** - Replacement Lens.


## TECHNICAL INFORMATION

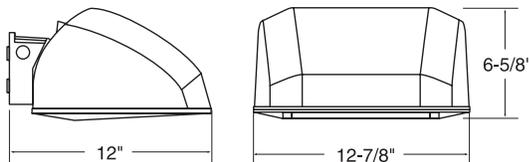


UL Wet Location Listed.

# FloodPak Series FPM


## PHOTOMETRICS

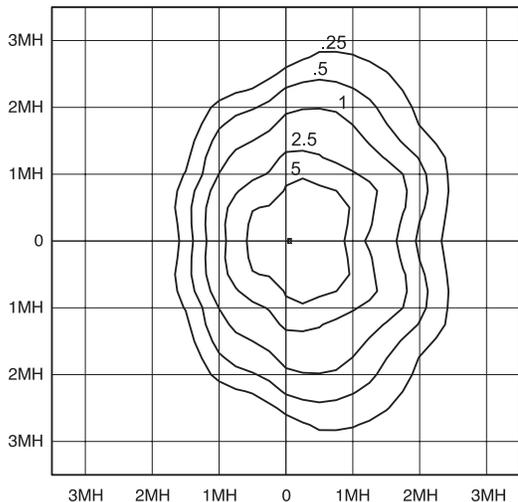

FPM175MAL-8 @ 0°

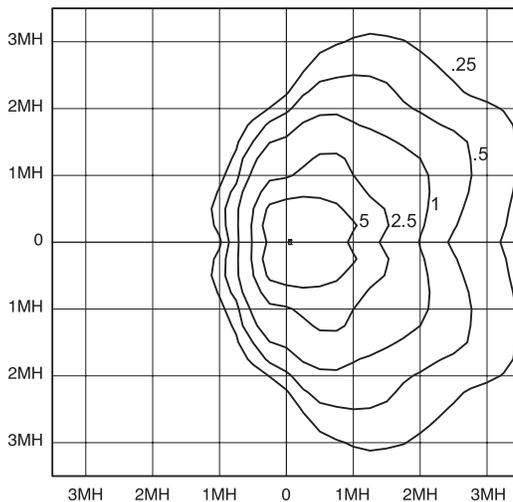

FPM175MAL-8 @ 22.5°

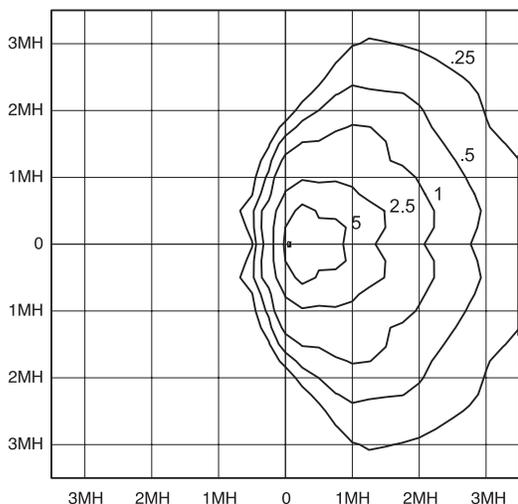

FPM175MAL-8 @ 45°

### FOOTCANDLE CORRECTION

Multiply the following factors times the footcandle values for changes in mounting height.

To Change from 15'				
New Hght.	8'	10'	15'	20'
Factor	3.5	2.3	1.0	

0.6

### LAMP AND WATT CONVERSIONS

Lamp	70W	100W	150W	175W
Multiplier	.36	.57	0.7	1.0

## MOUNTING OPTIONS



0° Down



22.5° Down



45° Down



0° Up



22.5° Up



45° Up



© 2013 Koninklijke Philips N.V. All rights reserved.  
Specifications are subject to change without notice.  
[www.philips.com/luminaires](http://www.philips.com/luminaires)

08/14

Philips Lighting  
North America Corporation  
200 Franklin Square Drive  
Somerset, NJ 08873  
Phone: 855-486-2216

Philips Lighting Company  
281 Hillmount Road  
Markham ON, Canada L6C 2S3  
Phone: 800-668-9008