




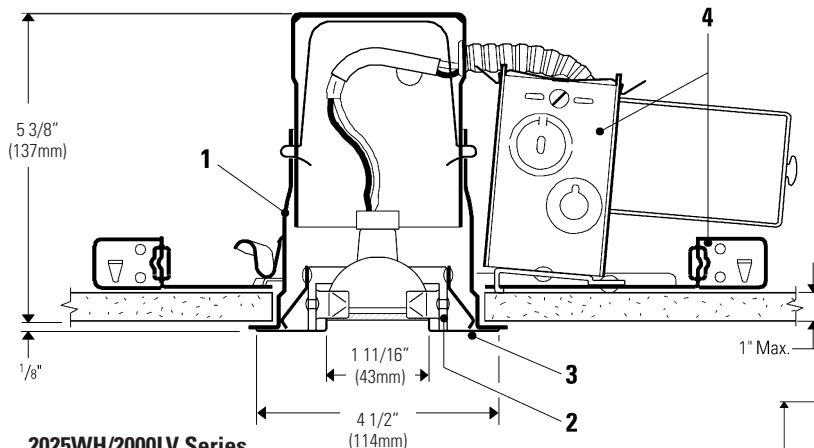


2025WH/2000LV Series
Standard MR16

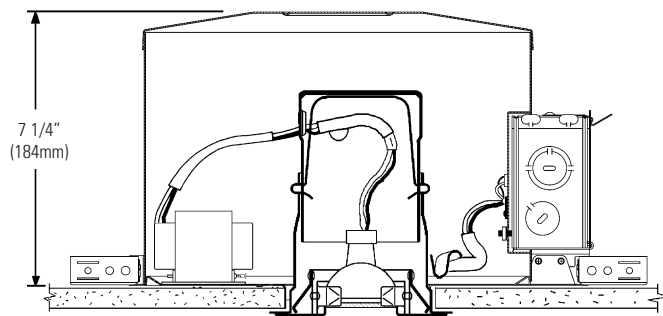

2025WH/2004ICV/N
Lytefining™ AirSeal® Insulated Ceiling

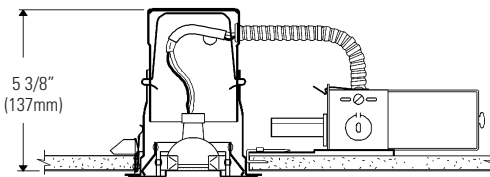

2025WH/2000LVR
Remodeler/Non-IC

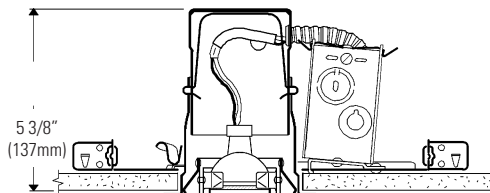

2025WH/2000LVNT
Low Voltage Remote Transformer

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim		Frame-In Kit — See Individual Frame-In Kit Specification Sheets		
		Low Voltage		
2025WH Matte White	Frame-In Kit	Installation Type	Lamping	Height
	2000LV	Standard Non-IC	20W-50W MR16	5 3/8"
	2000LVR	Remodeler Non-IC	37W MR16	5 3/8"
	2000LVRE1	Remodeler Non-IC	37W MR16	5 3/8"
	2000LVE1	Electronic Low Voltage Non-IC 120V	20W-50W MR16	5 3/8"
	2000LVE2	Electronic Low Voltage Non-IC 277V		5 3/8"
	2004ICV/N	Lytefining AirSeal® IC	20W-50W MR16	7 1/4"
	2000LVNT	Non-IC (no transformer)	20W-42W MR16	5 3/8"

Features

- Housing:** .036" (#20 ga.) galvanized steel.
- Swivel Housing:** Die-formed, 27 ga. steel. Provides 0° to 30° vertical adjustment; matte white finish.
- Trim Flange:** Die-formed, 22 ga. cold rolled steel. Matte white finish.
- Frame-In Kit:** (2000LV standard frame shown) Other frames shown on the right. See Frame-In Kit specification sheets for more details.

Options & Accessories

Retaining Clips: 1955 - For Installing in Existing Ceiling.

Labels

UL (Suitable for damp locations), I.B.E.W.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes: