


# Metallics


An **AMERICAN** Source For Premier  
and Innovative Fasteners and Anchors

## BLUE CONCRETE SCREW – STEEL MECHANICAL ZINC / CORROSION RESISTANT

The following Specification Sheet applies to all **Blue Concrete Screw - Steel Mechanical Zinc / Corrosion Resistant** in our **CSH** series.

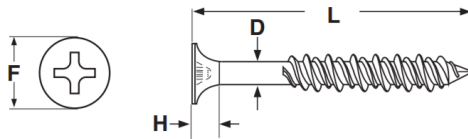

FLAT PHILLIPS CONCRETE SCREWS					
D	Thread Size	Fixture Clearance Hole	H	F	Phillips Driver Bit Size
Nominal Diameter			Head Height	Head Diameter	
			Ref	Ref	
3/16	11-16	1/4	9/64	3/8	2
1/4	1/4-15	5/16	3/16	1/2	3

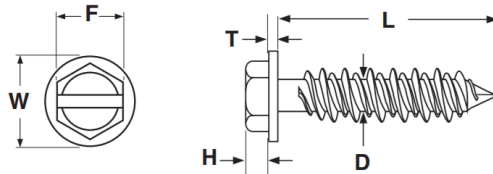

SLOTTED HEX WASHER CONCRETE SCREWS						
D	Thread Size	Fixture Clearance Hole	H	F	W	T
Nominal Diameter			Head Height	Width Across the Flats	Washer Diameter	Washer Thickness
			Ref	Ref	Ref	Ref
3/16	11-16	1/4	7/64	1/4	11/32	1/32
1/4	1/4-15	5/16	9/64	5/16	13/32	1/32


### Metallics

229 Cross Street  
Bristol, CT 06010

[www.metallics.us](http://www.metallics.us)

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



# Metallics

An **AMERICAN** Source For Premier  
and Innovative Fasteners and Anchors

CONCRETE SCREWS								
DxL	Drill Bit	Minimum Embedment	Maximum Embedment	Maximum Fixture Thickness	Ultimate Tensile Strength (lbs.)	Ultimate Shear Strength (lbs.)	Ultimate Tensile Strength (lbs.)	Ultimate Shear Strength (lbs.)
Screw Size (Diameter x Length)					In 4000 psi. Concrete, 1-1/4" embedment		In Concrete Block, 1-1/4" embedment	
3/16 x 1-1/4	5/32 x 3-1/2	1	1-3/4	0 - 1/4"	1060	1250	760	1020
3/16 x 1-3/4	5/32 x 3-1/2			1/4 - 3/4"				
3/16 x 2-1/4	5/32 x 4-1/2			3/4 - 1-1/4"				
3/16 x 2-3/4	5/32 x 4-1/2			1-1/4 - 1-3/4"				
3/16 x 3-1/4	5/32 x 5-1/2			1-3/4 - 2-1/4"				
3/16 x 4	5/32 x 5-1/2			2-1/2 - 3"				
1/4 x 1-1/4	3/16 x 3-1/2			0 - 1/4"	1540	2150	880	1270
1/4 x 1-3/4	3/16 x 3-1/2			1/4 - 3/4"				
1/4 x 2-1/4	3/16 x 4-1/2			3/4 - 1-1/4"				
1/4 x 2-3/4	3/16 x 4-1/2			1-1/4 - 1-3/4"				
1/4 x 3-1/4	3/16 x 5-1/2	1-3/4 - 2-1/4"						
1/4 x 4	3/16 x 5-1/2	2-1/2 - 3"						
1/4 x 5	3/16 x 6-1/2		3-1/4 - 4"					

<b>Description</b>	An externally threaded, hardened screw with a double lead, consisting of alternating raised and lowered threads with notches cut into the raised threads, and a diamond-shaped, nail-type point.
<b>Applications/ Advantages</b>	Cuts its own threads and when used in concrete, block or brick. Eliminates the need for an anchor when used in light or medium-duty applications. When used in concrete, it can be removed and re-driven into the same hole. Special carbide bits are recommended for driving concrete screws into masonry. Some applications include anchoring the following to masonry: electrical junction boxes, wooden beams, plywood, exterior insulation, metal flashing, thresholds. The Ruspert finish is a ceramic coating that also allows these fasteners to be used in pressure-treated lumber.
<b>Material</b>	Case hardened AISI 1022 steel
<b>Anchor Spacing</b>	Concrete screws should be installed a minimum of ten anchor diameters between each other. They have an advantage over most other types of masonry anchors in that they can be installed close to the edge of the material in which they are installed.
<b>Depth of Hole</b>	Hole should be of a depth equal to the required embedment plus 1/2"
<b>Tensile and Shear Strength</b>	The suggested safe working load is one-fourth the average proof test loads shown in the above table.
<b>Plating</b>	The most popular coating for concrete screws is a blue Ruspert finish.

## Metallics

229 Cross Street  
Bristol, CT 06010

[www.metallics.us](http://www.metallics.us)

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358